




OIL ANALYSIS REPORT

Sample Rating Trend

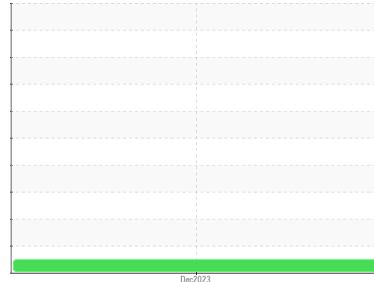

NORMAL



Machine Id
741006

Component
Transmission (Auto)

Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0092011	---	---
Sample Date	Client Info	04 Dec 2023	---	---
Machine Age	hrs Client Info	8926	---	---
Oil Age	hrs Client Info	600	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >325	33	---	---
Chromium	ppm ASTM D5185m >2	<1	---	---
Nickel	ppm ASTM D5185m >2	0	---	---
Titanium	ppm ASTM D5185m >3	0	---	---
Silver	ppm ASTM D5185m >5	0	---	---
Aluminum	ppm ASTM D5185m >75	6	---	---
Lead	ppm ASTM D5185m >40	2	---	---
Copper	ppm ASTM D5185m >50	6	---	---
Tin	ppm ASTM D5185m >10	<1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	74	---	---
Barium	ppm ASTM D5185m	0	---	---
Molybdenum	ppm ASTM D5185m	<1	---	---
Manganese	ppm ASTM D5185m	<1	---	---
Magnesium	ppm ASTM D5185m	3	---	---
Calcium	ppm ASTM D5185m	114	---	---
Phosphorus	ppm ASTM D5185m	234	---	---
Zinc	ppm ASTM D5185m	0	---	---
Sulfur	ppm ASTM D5185m	1893	---	---

CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	4	---	---
Sodium	ppm ASTM D5185m	2	---	---
Potassium	ppm ASTM D5185m >20	2	---	---

VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	NONE	---	---
Yellow Metal	scalar *Visual NONE	NONE	---	---
Precipitate	scalar *Visual NONE	NONE	---	---
Silt	scalar *Visual NONE	NONE	---	---
Debris	scalar *Visual NONE	NONE	---	---
Sand/Dirt	scalar *Visual NONE	NONE	---	---
Appearance	scalar *Visual NORML	NORML	---	---
Odor	scalar *Visual NORML	NORML	---	---
Emulsified Water	scalar *Visual >0.1	NEG	---	---
Free Water	scalar *Visual	NEG	---	---



OIL ANALYSIS REPORT

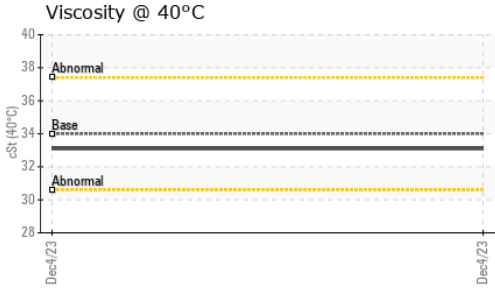




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 34	33.1	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

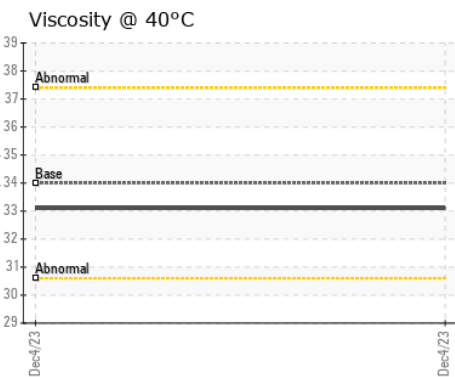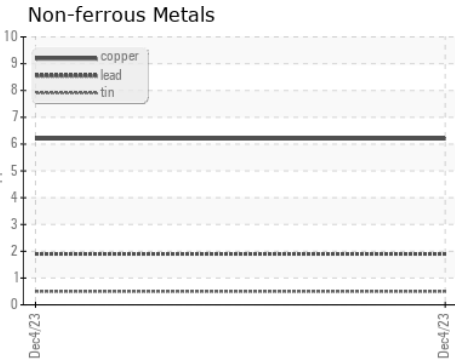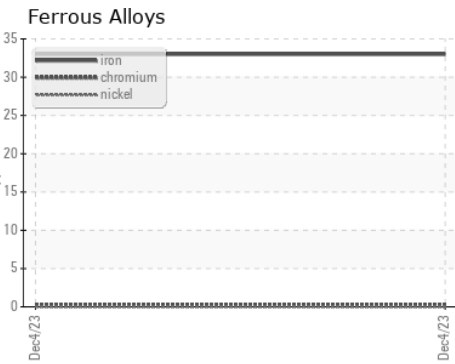

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0092011 **Received** : 06 Dec 2023
Lab Number : 06027258 **Diagnosed** : 08 Dec 2023
Unique Number : 10777049 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 856 - Houston South
 8515 Highway 6 South
 Houston, TX
 US 77083
 Contact: Apolinar Zacarias
 pzacariascano@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: