




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

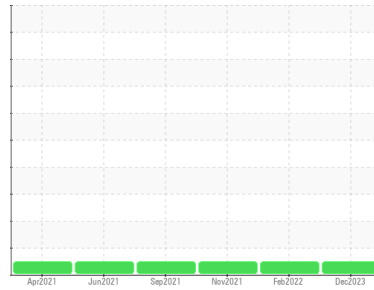

Machine Id  
**634M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0101439</b>	GFL0042348	GFL0036196
Sample Date	Client Info		<b>05 Dec 2023</b>	09 Feb 2022	18 Nov 2021
Machine Age	hrs	Client Info	<b>10444</b>	6641	5337
Oil Age	hrs	Client Info	<b>6641</b>	5337	5337
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>9</b>	9	9
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	1
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	3	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	6	2
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>14</b>	6	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	60	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>842</b>	1045	933
Calcium	ppm	ASTM D5185m 1070	<b>1260</b>	1189	1152
Phosphorus	ppm	ASTM D5185m 1150	<b>1003</b>	1108	1027
Zinc	ppm	ASTM D5185m 1270	<b>1205</b>	1324	1205
Sulfur	ppm	ASTM D5185m 2060	<b>3047</b>	2906	2542

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	3	2
Sodium	ppm	ASTM D5185m	<b>3</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	4	5
Fuel	%	ASTM D3524 >3.0	<b>2.8</b>	<1.0	<1.0

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.9</b>	0.7	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.1</b>	8.2	10
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.6</b>	20.1	23.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.5</b>	15.3	18.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.2</b>	9.1	8.5







# OIL ANALYSIS REPORT

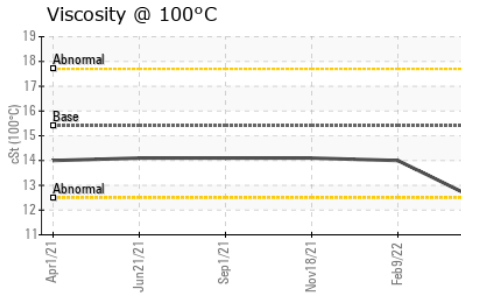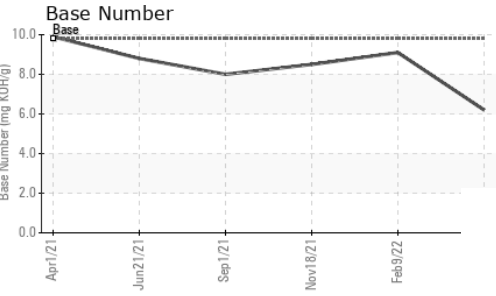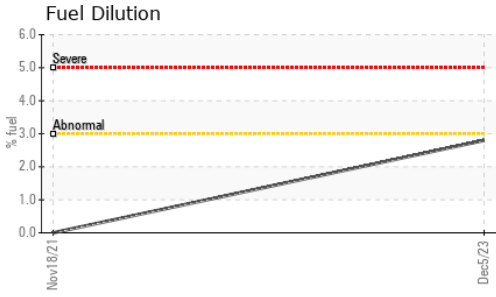

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.3</b>	14.0	14.1

## GRAPHS

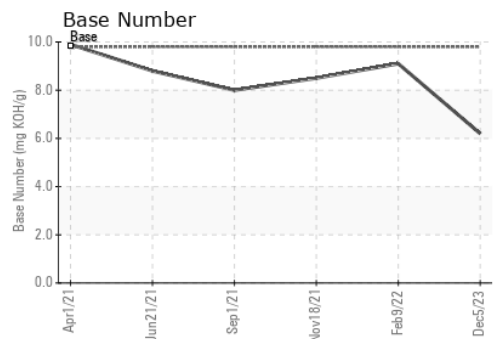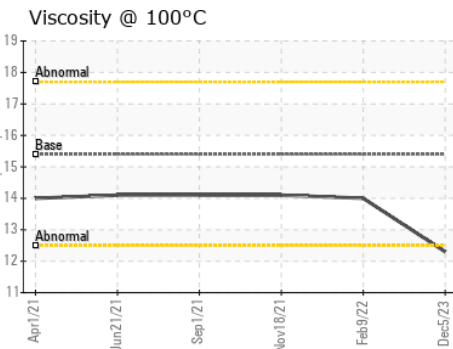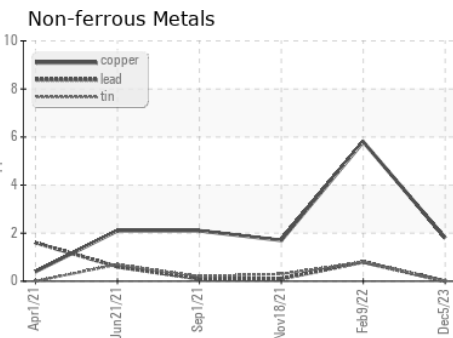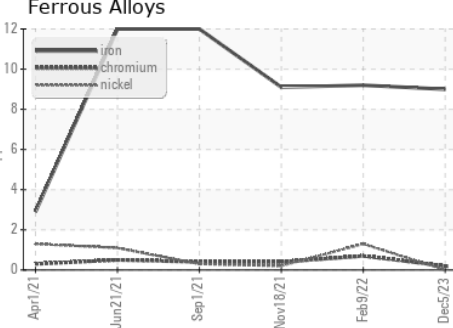

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0101439 **Received** : 07 Dec 2023  
**Lab Number** : **06027388** **Diagnosed** : 14 Dec 2023  
**Unique Number** : 10777179 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)