

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**SENNEBOGEN 840E MH-82**  
 Component  
**Front Final Drive**  
 Fluid  
**GEAR OIL SAE 80W90 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0112790</b>	---	---
Sample Date	Client Info		<b>16 Nov 2023</b>	---	---
Machine Age	hrs	Client Info	<b>230</b>	---	---
Oil Age	hrs	Client Info	<b>230</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>76</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m >25	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >50	<b>13</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	<b>0</b>	---	---
Barium	ppm	ASTM D5185m 200	<b>369</b>	---	---
Molybdenum	ppm	ASTM D5185m 12	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m 12	<b>0</b>	---	---
Calcium	ppm	ASTM D5185m 150	<b>3</b>	---	---
Phosphorus	ppm	ASTM D5185m 1650	<b>1163</b>	---	---
Zinc	ppm	ASTM D5185m 125	<b>10</b>	---	---
Sulfur	ppm	ASTM D5185m 22500	<b>29659</b>	---	---


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>7</b>	---	---
Sodium	ppm	ASTM D5185m >170	<b>5</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	<b>1.32</b>	---	---

# OIL ANALYSIS REPORT

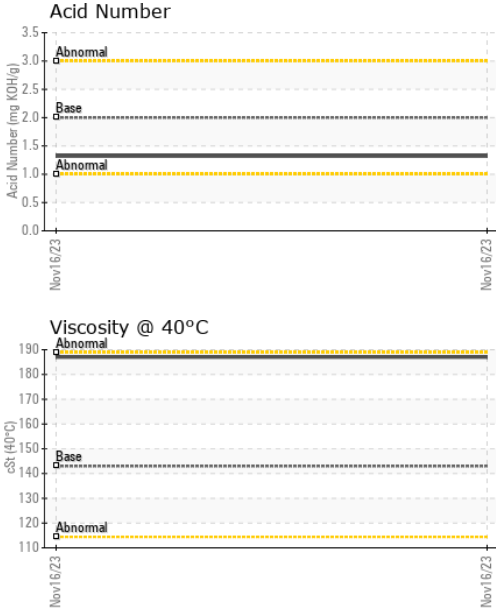


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	143	<b>187</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

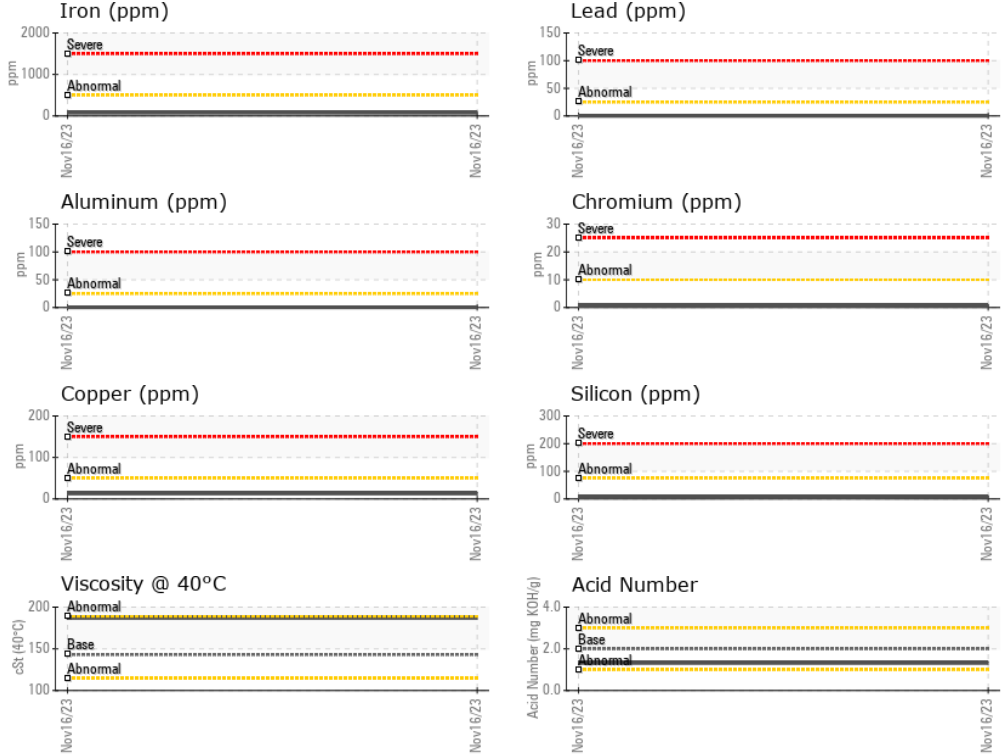

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112790 **Received** : 07 Dec 2023  
**Lab Number** : 06027930 **Diagnosed** : 08 Dec 2023  
**Unique Number** : 10777721 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**SCRAP METAL SERVICES (SMS Mill Services LLC)**  
 250 WEST U.S. HWY 12  
 CHESTERTON, IN  
 US 46304  
 Contact: DOMINIC WHITE  
 dwhite@scrapmetalservices.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: