


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

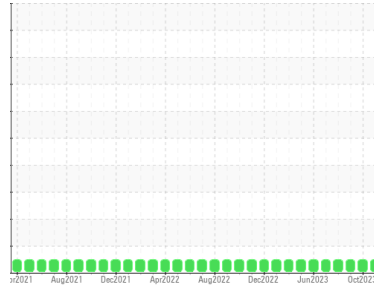

Area  
**ALBERT LEA**  
 Machine Id  
**Unit 04 DB010104E**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON MONOGRADE HD 40W (350 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: 2 gallons of lube oil added this month. )

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0106484</b>	PCA0106482	PCA0106480
Sample Date	Client Info		<b>29 Nov 2023</b>	31 Oct 2023	30 Sep 2023
Machine Age	hrs	Client Info	<b>14379</b>	14377	14360
Oil Age	hrs	Client Info	<b>14379</b>	14377	14360
Oil Changed	Client Info		<b>Not Chngd</b>	Oil Added	Oil Added
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>3</b>	3	0
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>&lt;1</b>	2	0
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >35	<b>2</b>	<1	1
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	1	1
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>3</b>	1	2
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>928</b>	962	915
Calcium	ppm	ASTM D5185m	<b>1046</b>	1060	1023
Phosphorus	ppm	ASTM D5185m	<b>1057</b>	1183	1132
Zinc	ppm	ASTM D5185m	<b>1342</b>	1381	1343
Sulfur	ppm	ASTM D5185m	<b>3376</b>	3136	3339

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>6</b>	6	5
Sodium	ppm	ASTM D5185m	<b>2</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	2
Fuel	%	ASTM D3524 >4.0	<b>0.9</b>	1.1	1.3





## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>3.7</b>	3.8	3.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>12.8</b>	13.1	12.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>6.7</b>	6.8	7.0
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.40</b>	1.33	1.67
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.28</b>	6.87	10.32









# OIL ANALYSIS REPORT

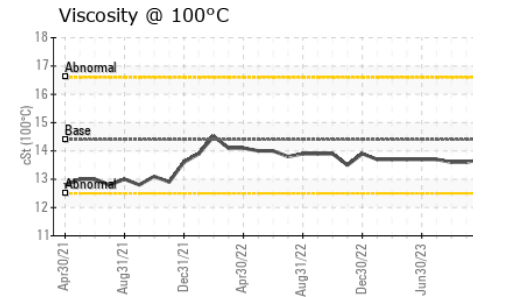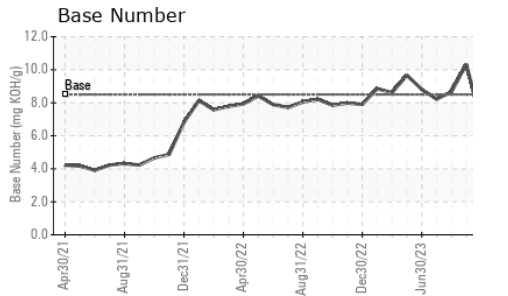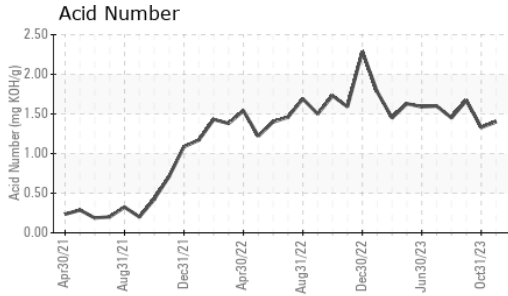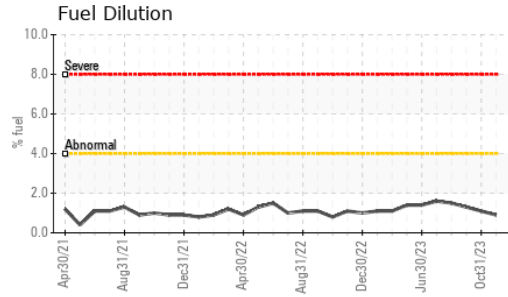

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.7	13.6

## GRAPHS

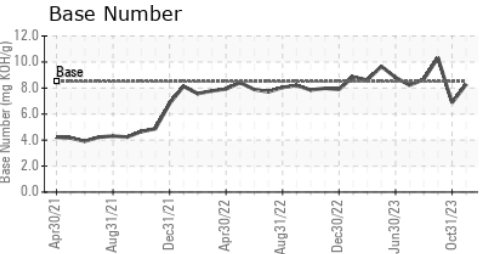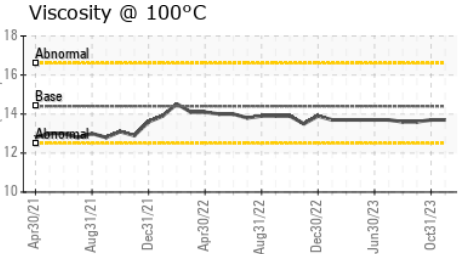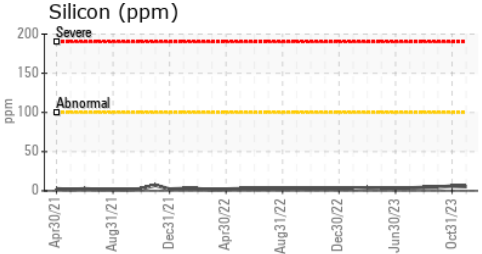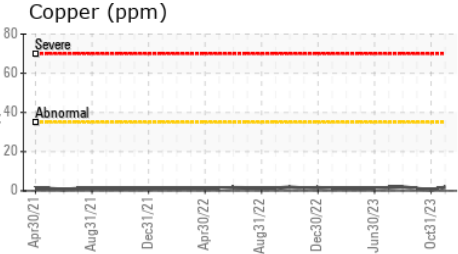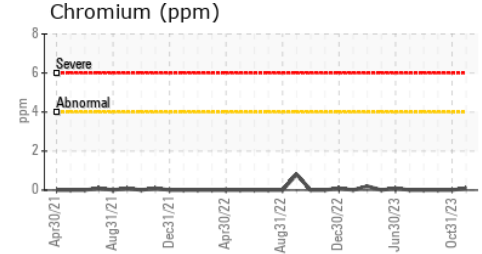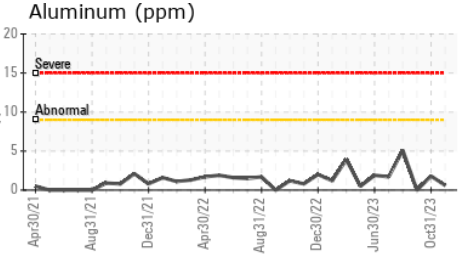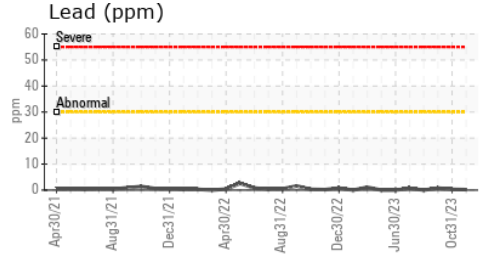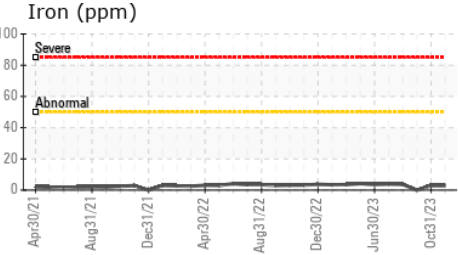

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106484 **Received** : 11 Dec 2023  
**Lab Number** : 06030850 **Diagnosed** : 18 Dec 2023  
**Unique Number** : 10780641 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

**Magellan Midstream LP - Albert Lea**  
 11406 755th Avenue  
 Glenville, MN  
 US 56036  
 Contact: Shawn Duren  
 shawn.duren@magellanlp.com  
 T: (641)231-6666  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)