


## **OIL ANALYSIS REPORT**

# (65242Z) Walgreens - Tractor [Walgreens - Tractor] 136A624220

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)



### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


#### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)				Nov2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0103489		
Sample Date		Client Info		29 Nov 2023		
Machine Age	mls	Client Info		61406		
Oil Age	mls	Client Info		61406		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	57		
Chromium	ppm	ASTM D5185m	>5	5		
Nickel	ppm	ASTM D5185m	>2	1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>30	230		
Lead	ppm	ASTM D5185m	>30	0		
Copper	ppm	ASTM D5185m	>150	142		
Tin	ppm	ASTM D5185m	>5	5		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	18		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	43		
Manganese	ppm	ASTM D5185m	0	4		
Magnesium	ppm	ASTM D5185m	950	643		
Calcium	ppm	ASTM D5185m	1050	1607		
Phosphorus	ppm	ASTM D5185m	995	782		
Zinc	ppm	ASTM D5185m	1180	949		
Sulfur	ppm	ASTM D5185m	2600	1871		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	7		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	491		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4		
Nitration	Abs/cm	*ASTM D7624	>20	10.3		
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.0		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.9		
Base Number (BN)	mg KOH/g	ASTM D2896		5.6		



## **OIL ANALYSIS REPORT**

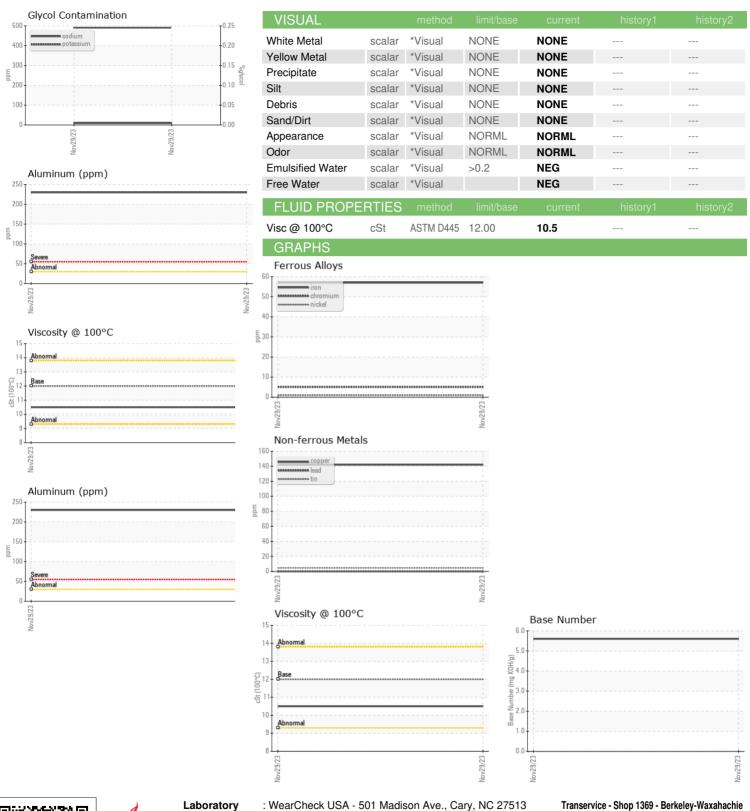





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

: 10782067

: PCA0103489 : 06032276 Test Package : FLEET

: 12 Dec 2023 Received Diagnosed : 15 Dec 2023 Diagnostician : Don Baldridge Transervice - Shop 1369 - Berkeley-Waxahachie 710 Ovilla Road

Waxahachie, TX US 75167 Contact: Robert Beal rbeal@transervice.com

T: (972)923-9928 F: (972)923-9919

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)