


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

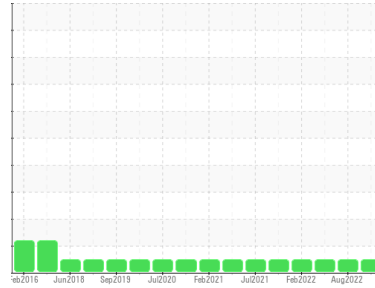

Area
FLEET
 Machine Id
VOLVO DAY CAB 26333 (S/N 4V4NC9EH1GN948764)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (36 QTS)

DIAGNOSIS

- Recommendation**
Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is no indication of any contamination in the oil.
- Fluid Condition**
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0106349	PCA0075934	PCA0071200
Sample Date	Client Info			12 Dec 2023	28 Aug 2022	04 Jun 2022
Machine Age	mls	Client Info		0	478720	456806
Oil Age	mls	Client Info		0	40000	20000
Oil Changed	Client Info			N/A	Changed	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>6.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	24	46	31
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	1	0	1
Titanium	ppm	ASTM D5185m		<1	21	24
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>25	4	5	4
Lead	ppm	ASTM D5185m	>40	2	6	2
Copper	ppm	ASTM D5185m	>330	3	5	4
Tin	ppm	ASTM D5185m	>15	2	2	1
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		<1	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	0	4	10
Barium	ppm	ASTM D5185m	0	11	0	0
Molybdenum	ppm	ASTM D5185m	50	59	46	45
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	950	884	703	739
Calcium	ppm	ASTM D5185m	1050	1052	1213	1302
Phosphorus	ppm	ASTM D5185m	995	905	951	950
Zinc	ppm	ASTM D5185m	1180	1189	1152	1171
Sulfur	ppm	ASTM D5185m	2600	2849	2615	2874

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	7	6
Sodium	ppm	ASTM D5185m		41	28	14
Potassium	ppm	ASTM D5185m	>20	35	4	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7	1	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.7	11.5	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0	26.7	22.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.4	21.8	18.2
Base Number (BN)	mg KOH/g	ASTM D2896		5.5	5.2	6.2





OIL ANALYSIS REPORT

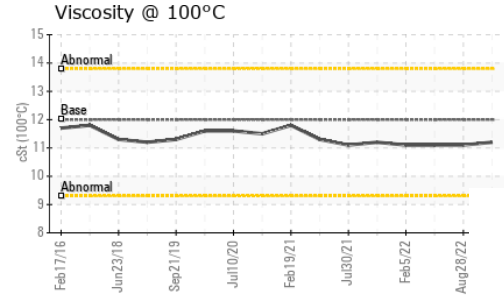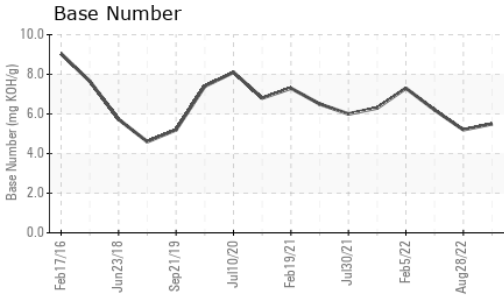

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
FLUID PROPERTIES					
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	11.1

GRAPHS

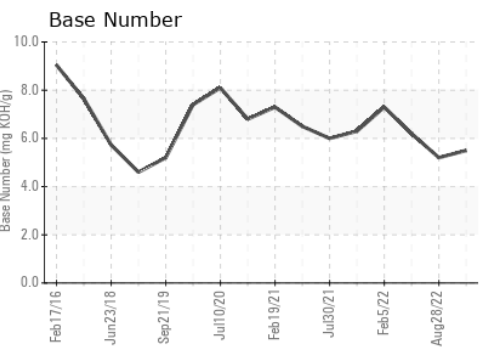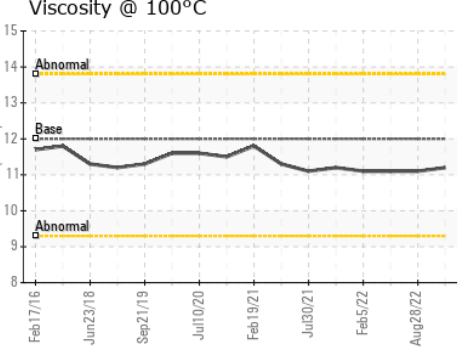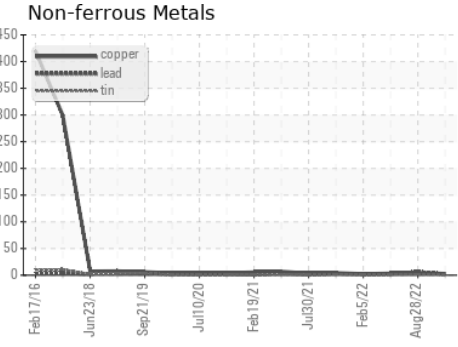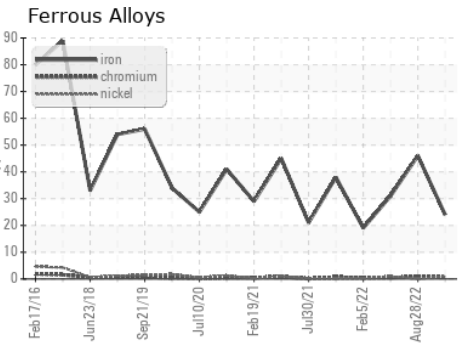

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106349 **Received** : 13 Dec 2023
Lab Number : 06033101 **Diagnosed** : 14 Dec 2023
Unique Number : 10782892 **Diagnostician** : Wes Davis
Test Package : FLEET

PERDUE FARMS - SALISBURY
 7036 ZION CHURCH ROAD
 SALISBURY, MD
 US 21802
 Contact: RICHARD O'NEAL
 richard.oneal@perdue.com
 T: (410)543-3628
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)