


OIL ANALYSIS REPORT

Sample Rating Trend

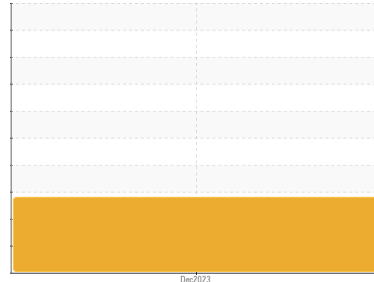

Machine Id
CRSH088

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor. (Customer Sample Comment: New purchase oil sampled)

Wear

All component wear rates are normal.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0070643	---	---
Sample Date	Client Info	07 Dec 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	---	---
Water	WC Method >0.2	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	70	---	---
Chromium	ppm ASTM D5185m >20	10	---	---
Nickel	ppm ASTM D5185m >4	<1	---	---
Titanium	ppm ASTM D5185m	<1	---	---
Silver	ppm ASTM D5185m >3	0	---	---
Aluminum	ppm ASTM D5185m >20	▲ 9	---	---
Lead	ppm ASTM D5185m >40	12	---	---
Copper	ppm ASTM D5185m >330	61	---	---
Tin	ppm ASTM D5185m >15	1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	75	---	---
Barium	ppm ASTM D5185m 0	6	---	---
Molybdenum	ppm ASTM D5185m 60	57	---	---
Manganese	ppm ASTM D5185m 0	1	---	---
Magnesium	ppm ASTM D5185m 1010	447	---	---
Calcium	ppm ASTM D5185m 1070	▲ 1644	---	---
Phosphorus	ppm ASTM D5185m 1150	1086	---	---
Zinc	ppm ASTM D5185m 1270	1272	---	---
Sulfur	ppm ASTM D5185m 2060	3610	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 30	---	---
Sodium	ppm ASTM D5185m	44	---	---
Potassium	ppm ASTM D5185m >20	31	---	---
Glycol	% *ASTM D2982	NEG	---	---


INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	---	---
Nitration	Abs/cm *ASTM D7624 >20	4.9	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	18.3	---	---


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.5	---	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	9.8	---	---

OIL ANALYSIS REPORT











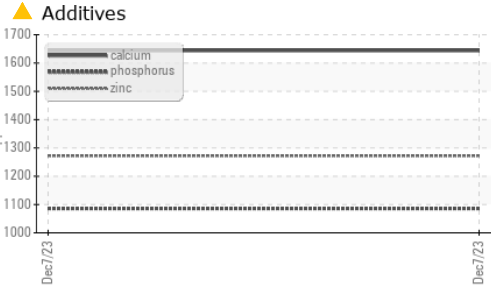


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

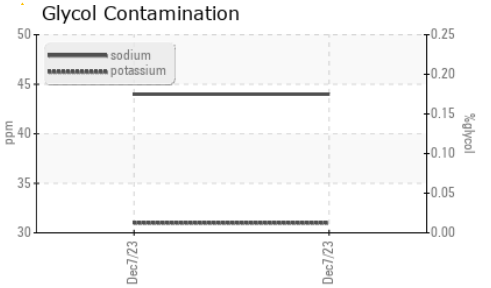

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	---

GRAPHS

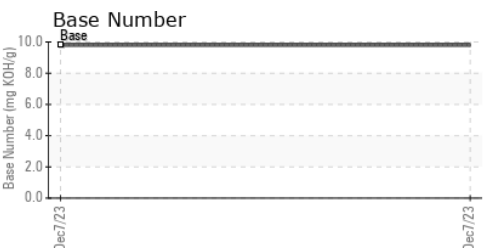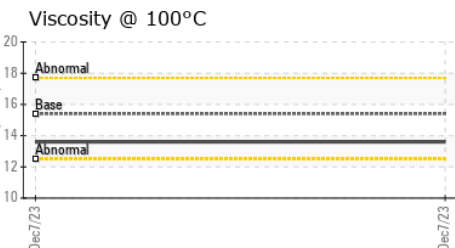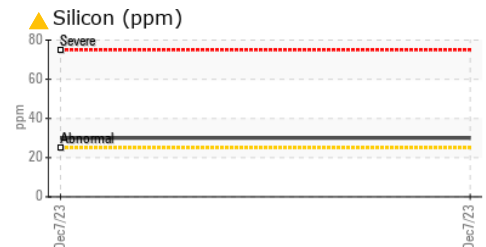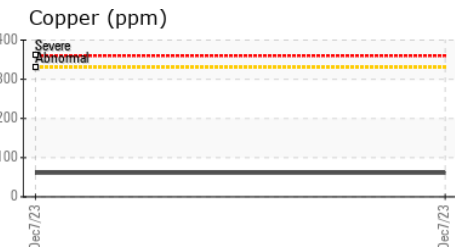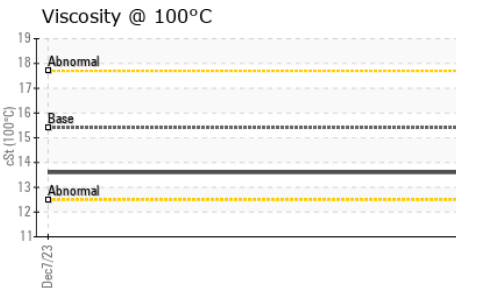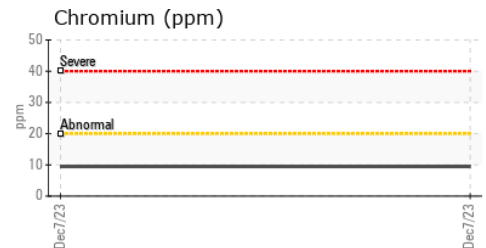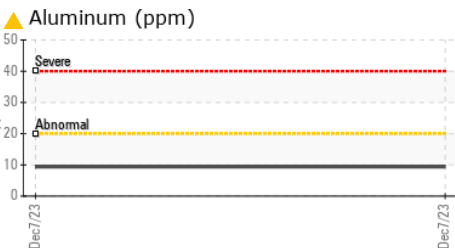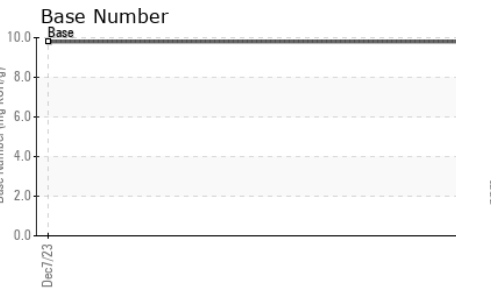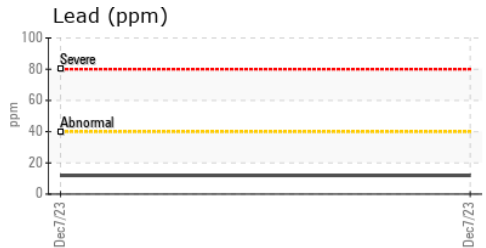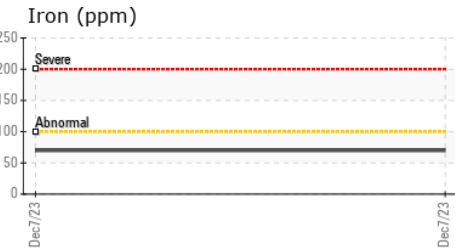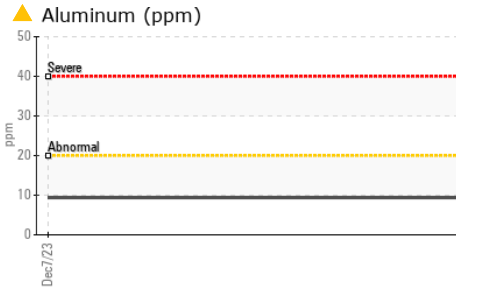

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0070643 **Received** : 13 Dec 2023
Lab Number : 06033998 **Diagnosed** : 18 Dec 2023
Unique Number : 10789227 **Diagnostician** : Jonathan Hester
Test Package : MOB 1 (Additional Tests: GLYCOL, TBN)

Kemp Quarries - Kemp Stone - Hulbert
 17801 Hwy 80
 Hulbert, OK
 US 74441
 Contact: HULBERT NOTIFICATIONS
 hulbert@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: