


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

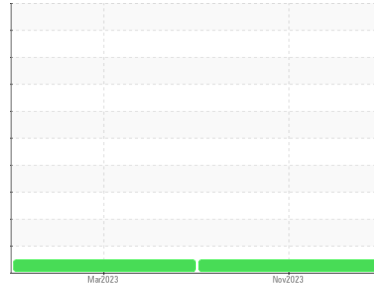

Area  
**(89786X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A69030**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0106614</b>	PCA0094952	---
Sample Date	Client Info		<b>28 Nov 2023</b>	23 Mar 2023	---
Machine Age	mls	Client Info	<b>455678</b>	417164	---
Oil Age	mls	Client Info	<b>50000</b>	40000	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>13</b>	21	---
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >30	<b>6</b>	8	---
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >150	<b>2</b>	4	---
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>2</b>	2	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>55</b>	65	---
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m 950	<b>1022</b>	1087	---
Calcium	ppm	ASTM D5185m 1050	<b>1157</b>	1196	---
Phosphorus	ppm	ASTM D5185m 995	<b>1119</b>	1119	---
Zinc	ppm	ASTM D5185m 1180	<b>1218</b>	1424	---
Sulfur	ppm	ASTM D5185m 2600	<b>2945</b>	3630	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>5</b>	4	---
Sodium	ppm	ASTM D5185m	<b>0</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>6</b>	7	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	0.8	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.0</b>	10.7	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>27.7</b>	23.7	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>25.8</b>	20.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.2</b>	5.9	---





# OIL ANALYSIS REPORT

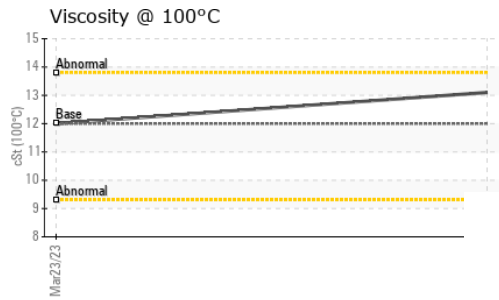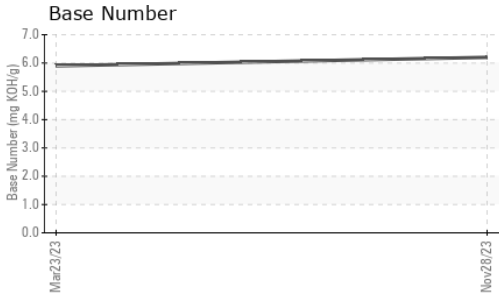

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	13.1	12.0

## GRAPHS

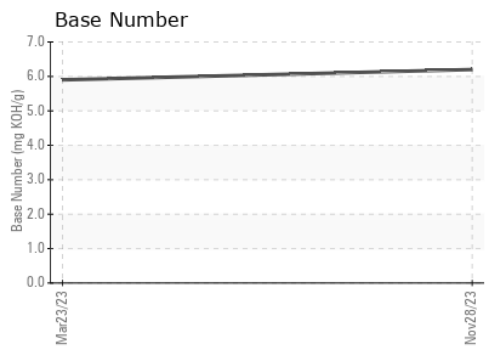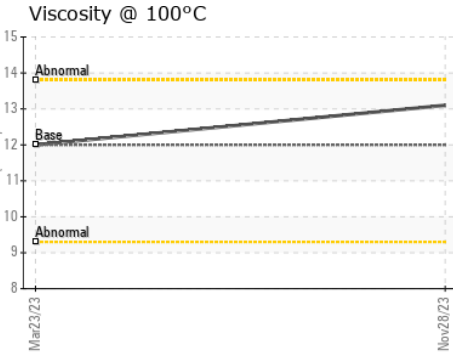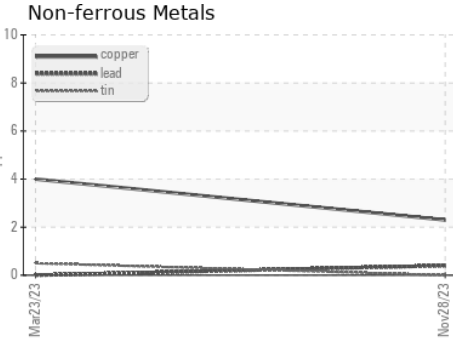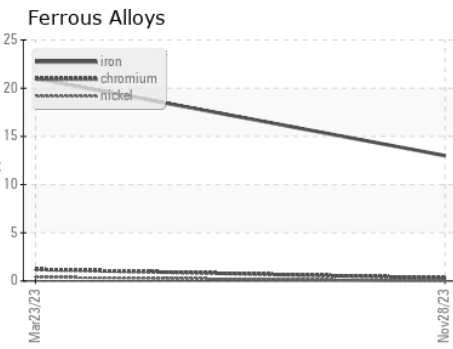

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106614 **Recieved** : 15 Dec 2023  
**Lab Number** : 06035661 **Diagnosed** : 19 Dec 2023  
**Unique Number** : 10790890 **Diagnostician** : Don Baldridge  
**Test Package** : FLEET

**Transervice - Shop 1369 - Berkeley-Waxahachie**  
 710 Ovilla Road  
 Waxahachie, TX  
 US 75167  
 Contact: Robert Beal  
 rbeal@transervice.com  
 T: (972)923-9928  
 F: (972)923-9919

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)