




OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY



Machine Id
427081-402333
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (8 GAL)

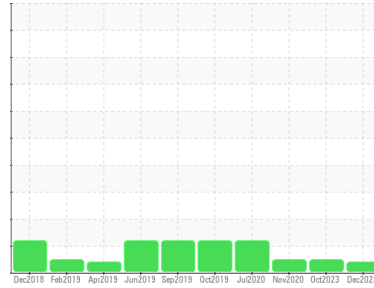

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0098739	GFL0065495	GFL11020223
Sample Date	Client Info		13 Dec 2023	06 Oct 2023	02 Nov 2020
Machine Age	hrs	Client Info	618	568	0
Oil Age	hrs	Client Info	150	150	450
Oil Changed	Client Info		Not Chngd	Not Chngd	?N/A
Sample Status			ATTENTION	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	0

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	2	1	9
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >5	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	2	1
Lead	ppm	ASTM D5185m >40	0	1	0
Copper	ppm	ASTM D5185m >330	<1	<1	1
Tin	ppm	ASTM D5185m >15	0	<1	---
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	95	4	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 60	0	56	60
Manganese	ppm	ASTM D5185m 0	<1	<1	---
Magnesium	ppm	ASTM D5185m 1010	707	914	---
Calcium	ppm	ASTM D5185m 1070	1200	1017	1975
Phosphorus	ppm	ASTM D5185m 1150	648	1038	833
Zinc	ppm	ASTM D5185m 1270	792	1240	---
Sulfur	ppm	ASTM D5185m 2060	2850	3110	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	3	---
Sodium	ppm	ASTM D5185m	<1	1	1
Potassium	ppm	ASTM D5185m >20	2	2	4
Fuel	%	ASTM D3524 >3.0	1.3	<1.0	<1.0

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.1	0.1	0.7
Nitration	Abs/cm	*ASTM D7624 >20	6.5	5.5	13
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.4	17.3	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	11.7	13.3	17
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.3	9.2	---







OIL ANALYSIS REPORT

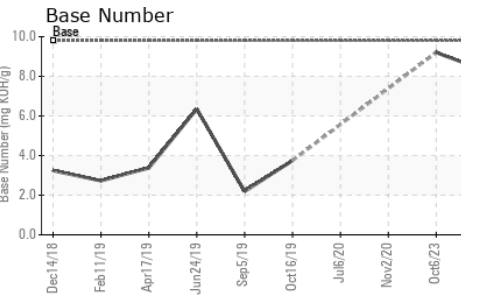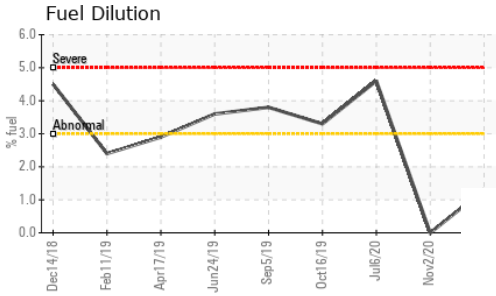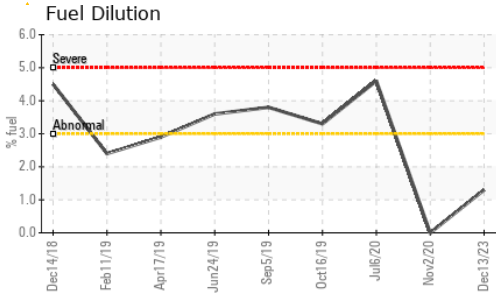

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.3	13.9

GRAPHS

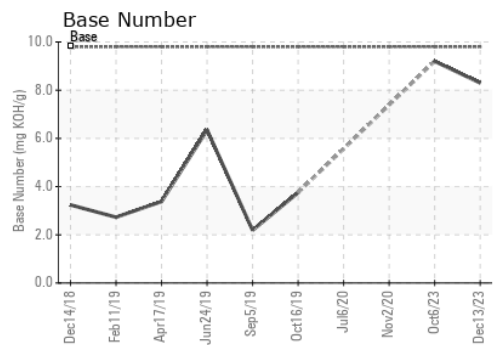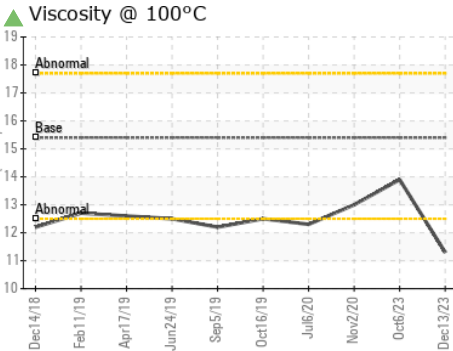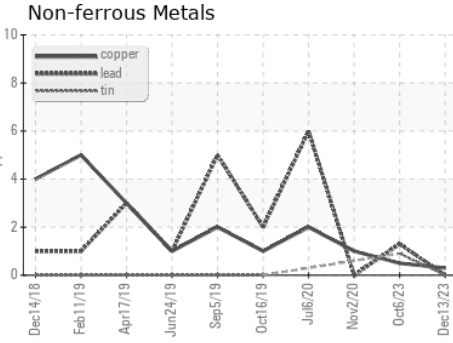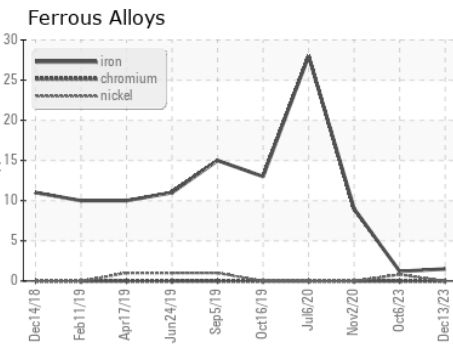

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0098739 **Received** : 18 Dec 2023
Lab Number : 06037504 **Diagnosed** : 23 Dec 2023
Unique Number : 10792733 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 829 - Wilco Hauling
 5054 Highway HH
 Hartville, MO
 US 65667
 Contact: James Jones
 james.jones@gflenv.com
 T: (417)349-5006
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)