


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

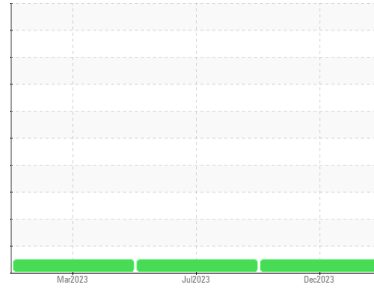

Area
(16539Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A61403
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	PCA0105408	PCA0093785	PCA0093820	
Sample Date	Client Info	18 Dec 2023	24 Jul 2023	23 Mar 2023	
Machine Age	mls	Client Info	286858	256717	243378
Oil Age	mls	Client Info	25000	37000	24000
Oil Changed	Client Info	Changed	Changed	Not Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	12	15	9
Chromium	ppm ASTM D5185m >5	<1	1	<1
Nickel	ppm ASTM D5185m >2	0	0	0
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >30	4	2	3
Lead	ppm ASTM D5185m >30	0	0	0
Copper	ppm ASTM D5185m >150	7	10	7
Tin	ppm ASTM D5185m >5	1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	1	0	0
Barium	ppm ASTM D5185m 0	0	2	0
Molybdenum	ppm ASTM D5185m 50	62	66	61
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 950	1075	961	1005
Calcium	ppm ASTM D5185m 1050	1126	1154	1148
Phosphorus	ppm ASTM D5185m 995	1109	1058	1039
Zinc	ppm ASTM D5185m 1180	1332	1299	1301
Sulfur	ppm ASTM D5185m 2600	3065	3025	3384

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	5	7	6
Sodium	ppm ASTM D5185m	<1	0	3
Potassium	ppm ASTM D5185m >20	2	6	3



INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.4	0.5	0.3
Nitration	Abs/cm *ASTM D7624 >20	8.0	8.2	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	19.7	19.7	19.0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.3	16.0	14.7
Base Number (BN)	mg KOH/g ASTM D2896	7.1	7.3	8.9





OIL ANALYSIS REPORT

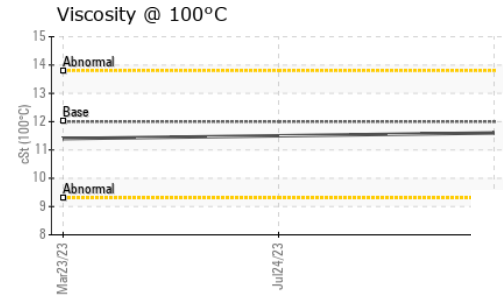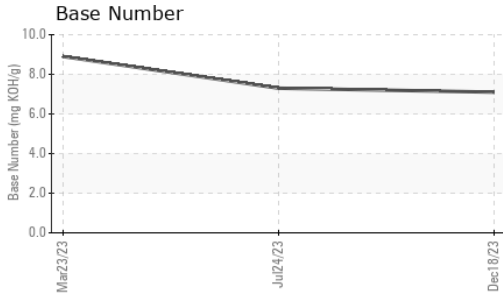

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.6	11.5	11.4

GRAPHS

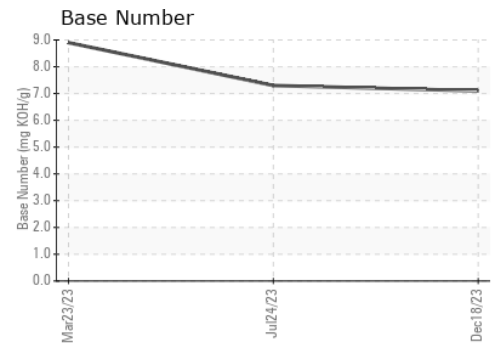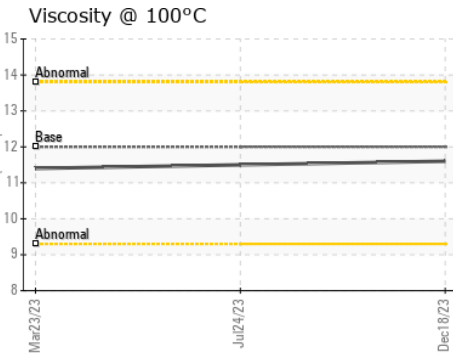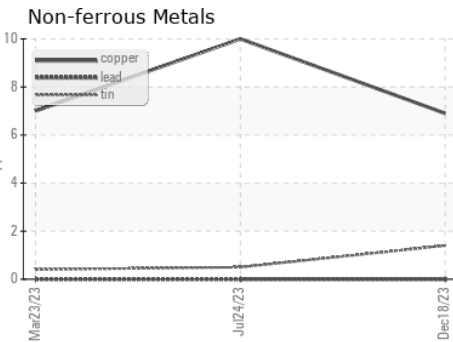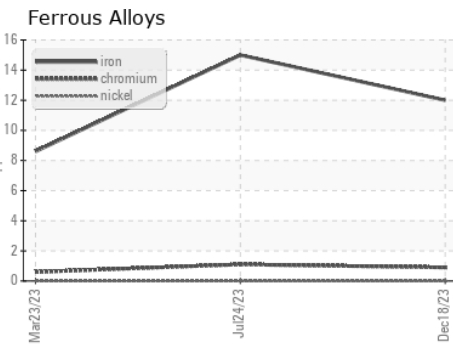

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0105408 **Received** : 29 Dec 2023
Lab Number : **06047547** **Diagnosed** : 29 Dec 2023
Unique Number : 10808155 **Diagnostician** : Wes Davis
Test Package : FLEET

Transervice - Shop 1366 - Berkeley-Woodland
 2370 East Main Street
 Woodland, CA
 US 95776
 Contact: Gary Mann
 gmanna@transervice.com
 T: (530)666-7771
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)