


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

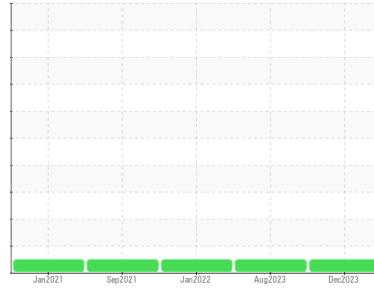

Machine Id  
**391339**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0114609</b>	PCA0102934	PCA0054793
Sample Date	Client Info			<b>20 Dec 2023</b>	26 Aug 2023	25 Jan 2022
Machine Age	mls	Client Info		<b>17473</b>	23962	96448
Oil Age	mls	Client Info		<b>17473</b>	23962	7000
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>20</b>	25	25
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	3	1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	5	4
Lead	ppm	ASTM D5185m	>40	<b>5</b>	10	2
Copper	ppm	ASTM D5185m	>330	<b>2</b>	3	22
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>4</b>	2	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>57</b>	58	59
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>893</b>	943	1010
Calcium	ppm	ASTM D5185m	1050	<b>1129</b>	1358	1275
Phosphorus	ppm	ASTM D5185m	995	<b>1049</b>	1013	1067
Zinc	ppm	ASTM D5185m	1180	<b>1268</b>	1292	1349
Sulfur	ppm	ASTM D5185m	2600	<b>3074</b>	3628	2777

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	4	3
Sodium	ppm	ASTM D5185m		<b>6</b>	9	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.5</b>	1.5	1.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.5</b>	12.7	11.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.2</b>	24.5	22.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.9</b>	21.7	18.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.6</b>	7.1	8.9









# OIL ANALYSIS REPORT

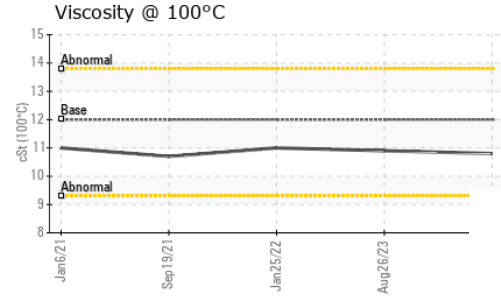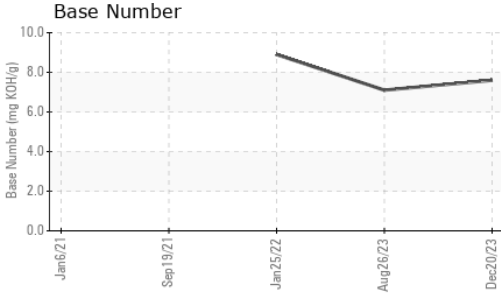

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	10.9

## GRAPHS

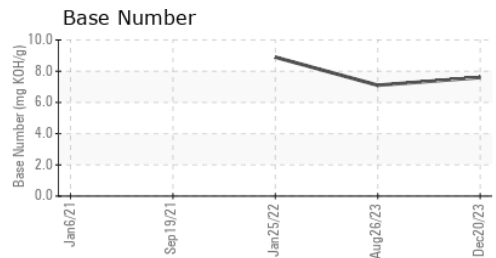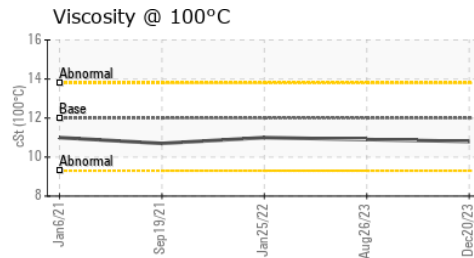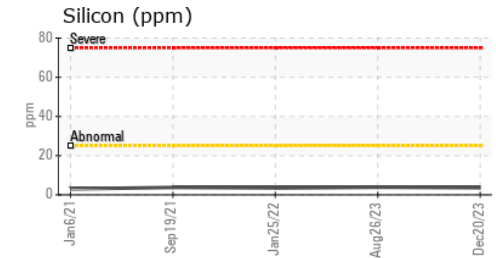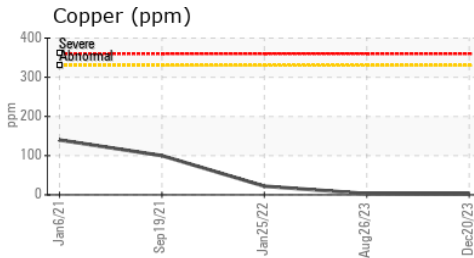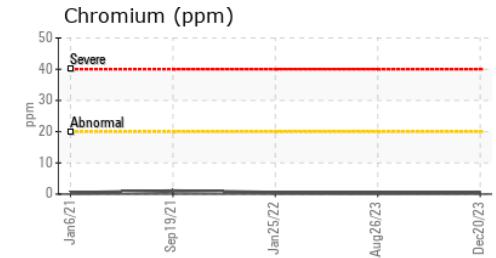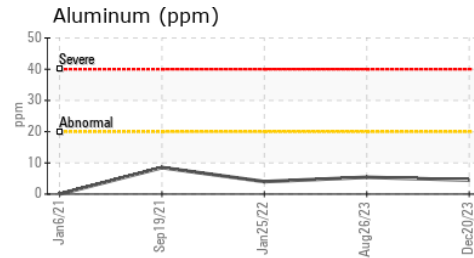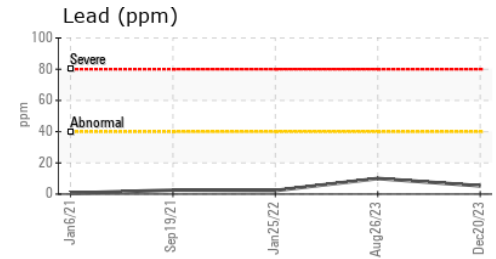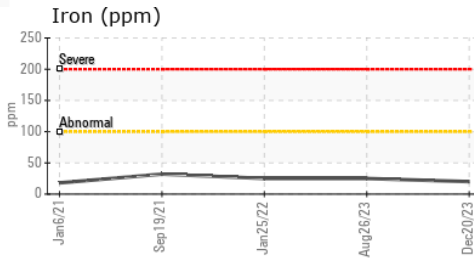

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0114609 **Recieved** : 03 Jan 2024  
**Lab Number** : 06049749 **Diagnosed** : 04 Jan 2024  
**Unique Number** : 10815698 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #118**  
 2196 BENNETT ROAD  
 PHILADELPHIA, PA  
 US 19116  
 Contact: ROSTY VITER  
 rviter@millertransgroup.com  
 T: (215)552-9832  
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)