




OIL ANALYSIS REPORT

Sample Rating Trend

VISUAL METAL

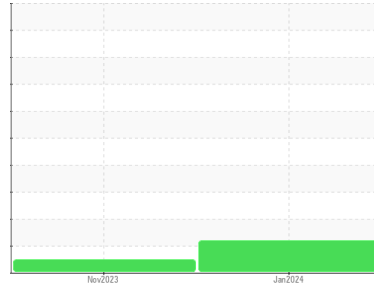

Machine Id
914051
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (36 QTS)

DIAGNOSIS

Recommendation

We suspect abnormal metal contamination may be due to sampling method. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

High concentration of visible metal present. All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0104253	GFL0059235	---
Sample Date	Client Info		02 Jan 2024	15 Nov 2023	---
Machine Age	hrs	Client Info	34	31	---
Oil Age	hrs	Client Info	34	31	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	6	89	---
Chromium	ppm	ASTM D5185m >20	<1	5	---
Nickel	ppm	ASTM D5185m >5	0	<1	---
Titanium	ppm	ASTM D5185m >2	0	<1	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >20	2	8	---
Lead	ppm	ASTM D5185m >40	<1	2	---
Copper	ppm	ASTM D5185m >330	<1	4	---
Tin	ppm	ASTM D5185m >15	<1	2	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	2	2	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 60	48	64	---
Manganese	ppm	ASTM D5185m 0	<1	1	---
Magnesium	ppm	ASTM D5185m 1010	793	991	---
Calcium	ppm	ASTM D5185m 1070	865	1141	---
Phosphorus	ppm	ASTM D5185m 1150	969	1043	---
Zinc	ppm	ASTM D5185m 1270	1100	1300	---
Sulfur	ppm	ASTM D5185m 2060	2908	2710	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	9	14	---
Sodium	ppm	ASTM D5185m	3	13	---
Potassium	ppm	ASTM D5185m >20	2	1	---

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0	1.6	---
Nitration	Abs/cm	*ASTM D7624 >20	3.9	17.0	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.9	30.7	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.0	31.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.8	4.5	---







OIL ANALYSIS REPORT

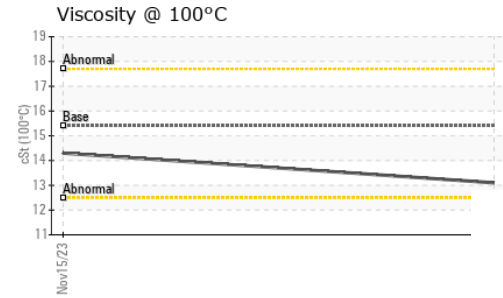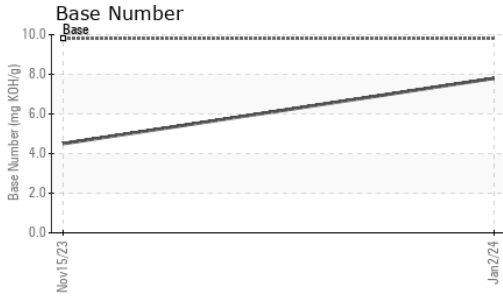

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	▲ HEAVY	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	14.3

GRAPHS

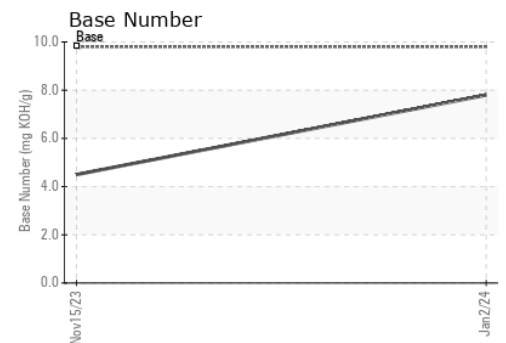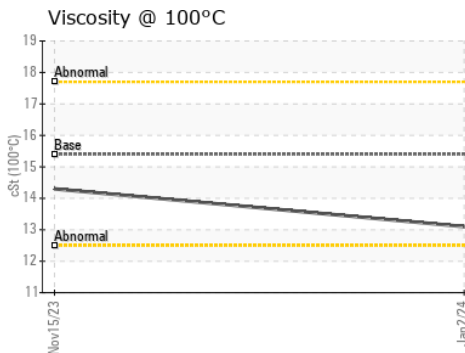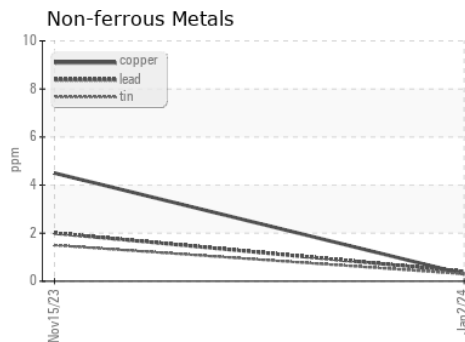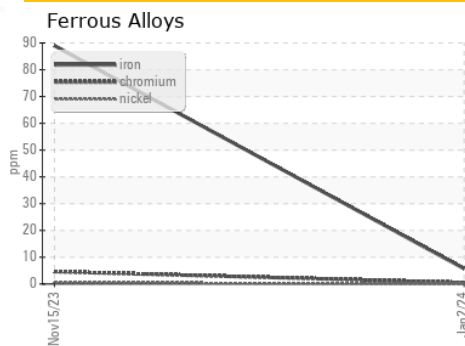

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0104253
 Lab Number : 06053477
 Unique Number : 10819426
 Test Package : FLEET

GFL Environmental - 410 - Michigan West
 39000 Van Born Rd
 Wayne, MI
 US 48184
 Contact: Belal Dgheish
 bdgheish@gflenv.com
 T: (734)714-2340
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)