


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

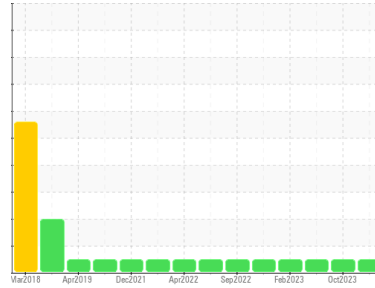

Area  
**KEMP QUARRIES / RIVER VALLEY BACKBONE**  
 Machine Id  
**OHT087**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0069907</b>	PCA0084886	PCA0084877
Sample Date	Client Info		<b>28 Dec 2023</b>	13 Oct 2023	14 Aug 2023
Machine Age	hrs	Client Info	<b>33775</b>	33094	33094
Oil Age	hrs	Client Info	<b>1200</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>5</b>	3	8
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >10	<b>2</b>	1	2
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>2</b>	2	<1
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >75	<b>1</b>	1	2
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	9	2
Molybdenum	ppm	ASTM D5185m 0	<b>2</b>	2	2
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m 0	<b>12</b>	14	19
Calcium	ppm	ASTM D5185m	<b>92</b>	88	103
Phosphorus	ppm	ASTM D5185m	<b>380</b>	369	404
Zinc	ppm	ASTM D5185m	<b>443</b>	454	523
Sulfur	ppm	ASTM D5185m	<b>1038</b>	928	1085


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	3	4
Sodium	ppm	ASTM D5185m	<b>0</b>	0	0
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

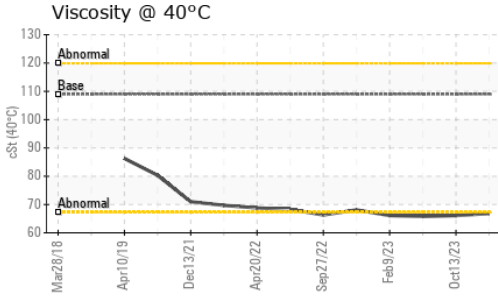









### FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	109	<b>66.8</b>	66.1	65.8

### SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color			no image	no image	no image
Bottom			no image	no image	no image

### GRAPHS

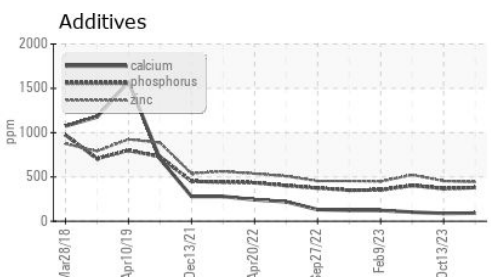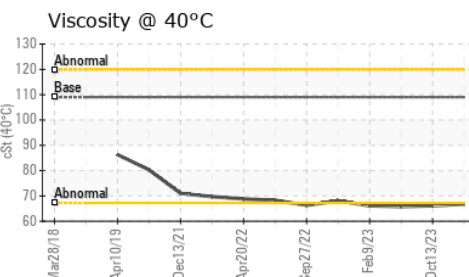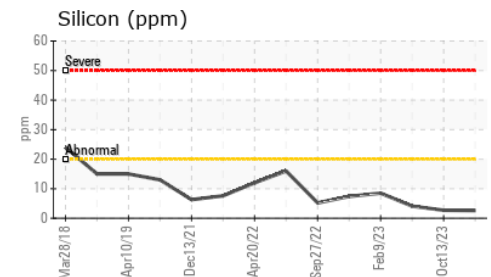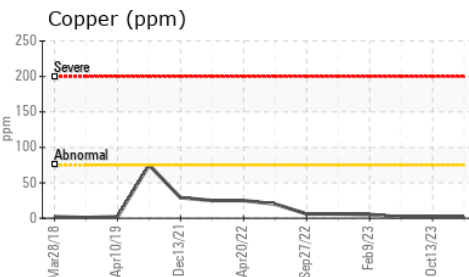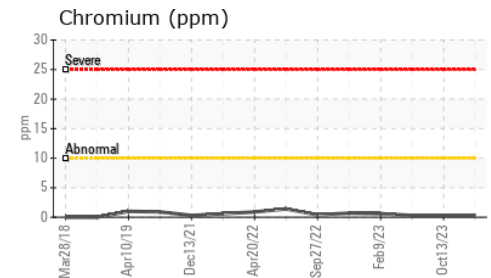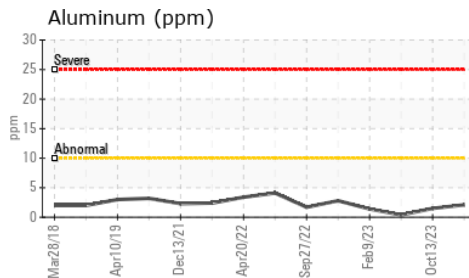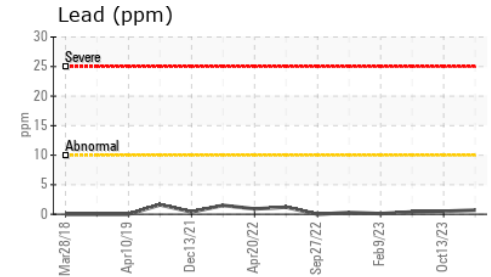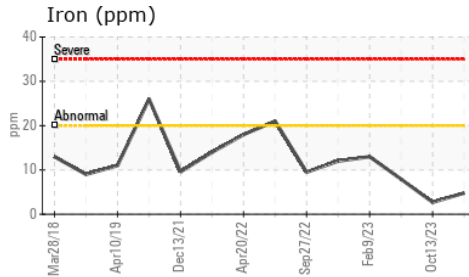

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0069907 **Received** : 08 Jan 2024  
**Lab Number** : **06054448** **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10820397 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1

**Kemp Quarries - River Valley - Backbone**  
 5600 S Hwy 253  
 Huntington, AR  
 US 72940  
 Contact:  
 backbone@rivervalleyquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: