




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
413115
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP 5W30 (--- GAL)

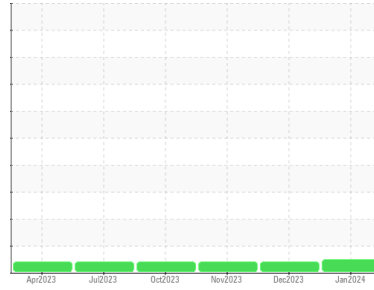

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0102476	GFL0102553	GFL0098612
Sample Date	Client Info	02 Jan 2024	01 Dec 2023	04 Nov 2023
Machine Age	hrs	2156	2023	1889
Oil Age	hrs	0	0	0
Oil Changed	Client Info	Not Chngd	Not Chngd	N/A
Sample Status		NORMAL	ATTENTION	ATTENTION

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	9	10	7
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >15	1	<1	<1
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >3	<1	0	0
Aluminum	ppm ASTM D5185m >20	4	3	2
Lead	ppm ASTM D5185m >40	<1	0	0
Copper	ppm ASTM D5185m >330	8	8	7
Tin	ppm ASTM D5185m >15	<1	0	<1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	33	40	46
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 64	60	61	57
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1160	1138	1136	1118
Calcium	ppm ASTM D5185m 820	845	845	821
Phosphorus	ppm ASTM D5185m 1160	1155	1025	976
Zinc	ppm ASTM D5185m 1260	1378	1298	1246
Sulfur	ppm ASTM D5185m 3000	3520	3225	3222

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	8	6	4
Sodium	ppm ASTM D5185m	5	5	14
Potassium	ppm ASTM D5185m >20	5	5	3

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.3	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	8.9	8.4	7.6
Sulfation	Abs/.1mm *ASTM D7415 >30	20.5	19.7	19.6

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.2	17.8	17.3
Base Number (BN)	mg KOH/g ASTM D2896 11.0	8.1	8.3	9.2







OIL ANALYSIS REPORT

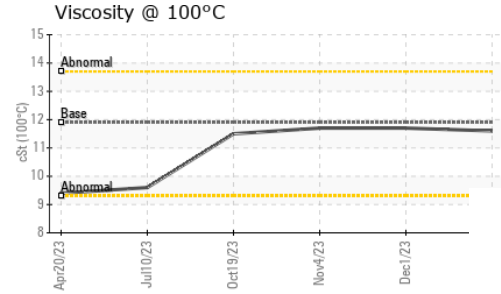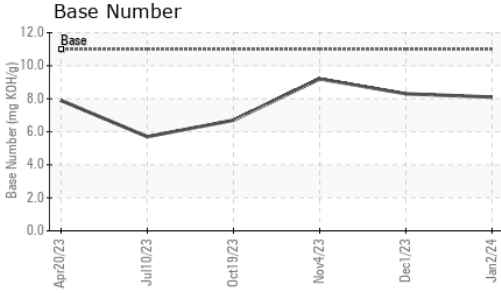

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	11.6	▲ 11.7 ▲ 11.7

GRAPHS

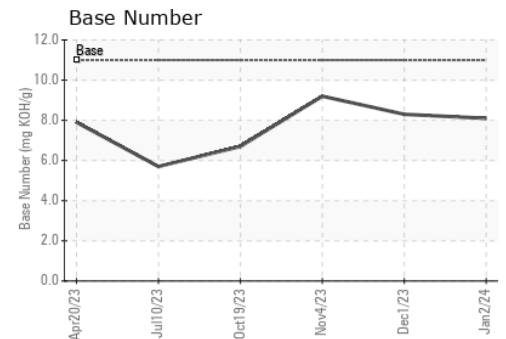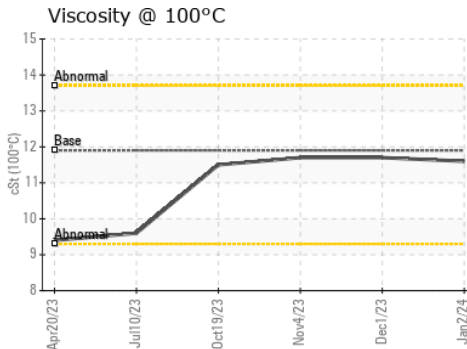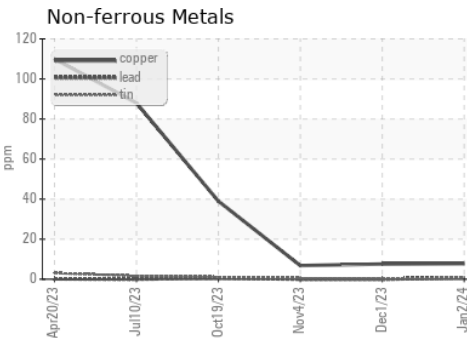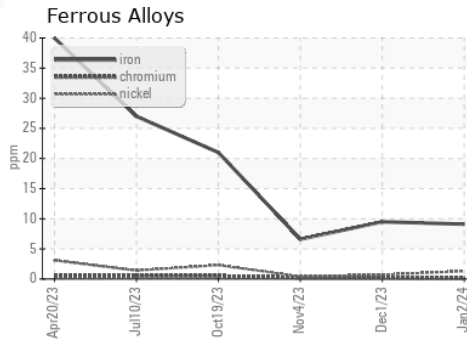

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0102476
 Lab Number : 06054630
 Unique Number : 10820579
 Test Package : FLEET

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Robert Hart
 rhart@gflenv.com
 T: (580)461-1509
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)