


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

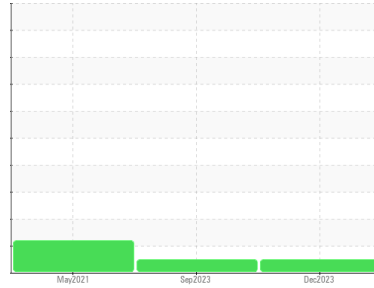

Machine Id
307302
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0105608	PCA0087281	PCA0050475
Sample Date	Client Info			27 Dec 2023	29 Sep 2023	20 May 2021
Machine Age	mls	Client Info		189445	175462	40549
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	54	42	149
Chromium	ppm	ASTM D5185m	>20	2	1	4
Nickel	ppm	ASTM D5185m	>4	<1	<1	2
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	13	10	47
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	5	8	26
Tin	ppm	ASTM D5185m	>15	4	1	5
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	11	11	23
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	81	76	22
Manganese	ppm	ASTM D5185m	0	<1	<1	7
Magnesium	ppm	ASTM D5185m	950	1165	1069	770
Calcium	ppm	ASTM D5185m	1050	1399	1286	1350
Phosphorus	ppm	ASTM D5185m	995	1255	1197	795
Zinc	ppm	ASTM D5185m	1180	1564	1443	931
Sulfur	ppm	ASTM D5185m	2600	3320	3305	2560

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	7	10
Sodium	ppm	ASTM D5185m		3	2	8
Potassium	ppm	ASTM D5185m	>20	8	6	▲ 78

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8	0.8	0.9
Nitration	Abs/cm	*ASTM D7624	>20	17.0	13.6	12.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	32.3	27.5	25.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	34.5	26.9	21.4
Base Number (BN)	mg KOH/g	ASTM D2896		5.3	7.4	---









OIL ANALYSIS REPORT

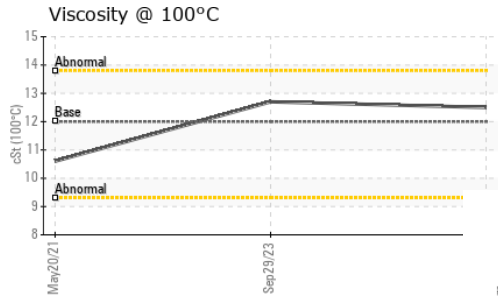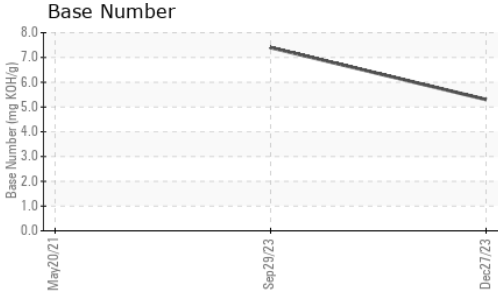

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.5	12.7

GRAPHS

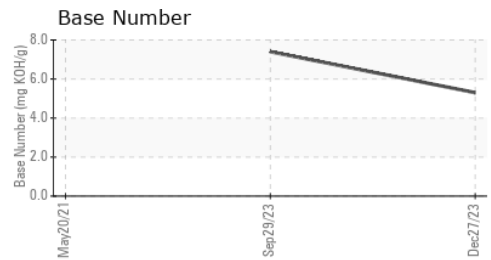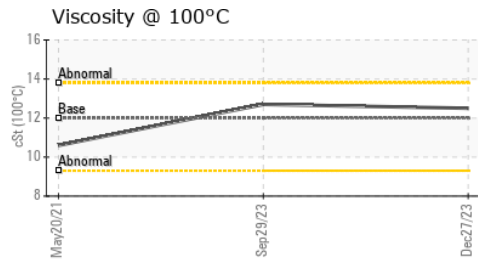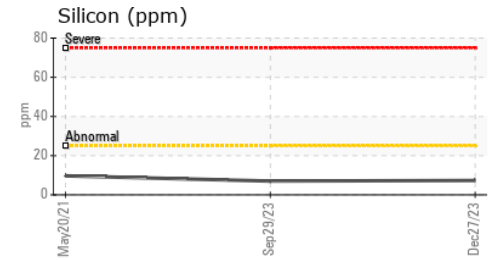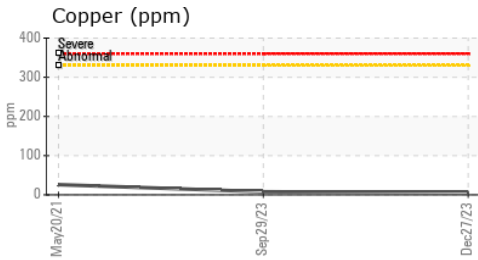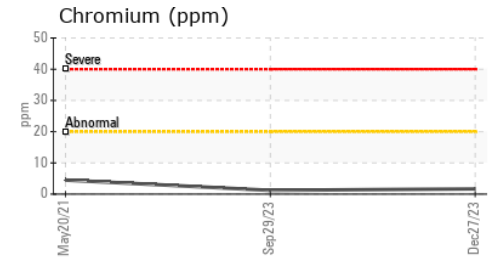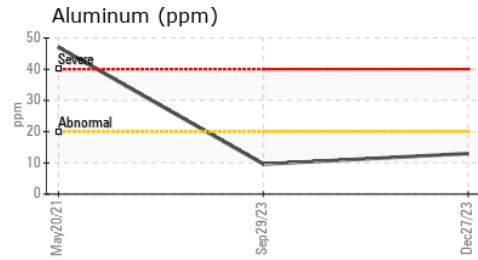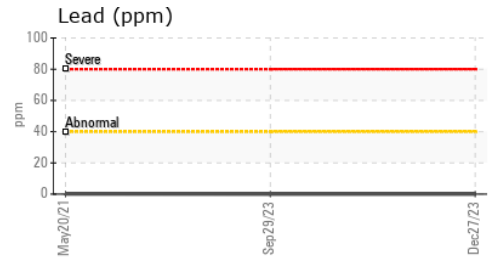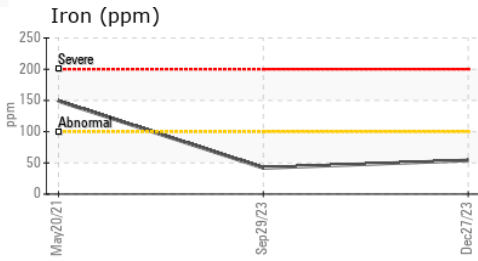

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0105608 **Recieved** : 10 Jan 2024
Lab Number : 06056425 **Diagnosed** : 11 Jan 2024
Unique Number : 10822374 **Diagnostician** : Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #116
 1197 NORTH MAIN ROAD
 VINELAND, NJ
 US 08360
 Contact: GARY PRICE
 gprice@millertransgroup.com
 T: (856)696-4848
 F: (856)696-5629

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)