




# OIL ANALYSIS REPORT

Sample Rating Trend

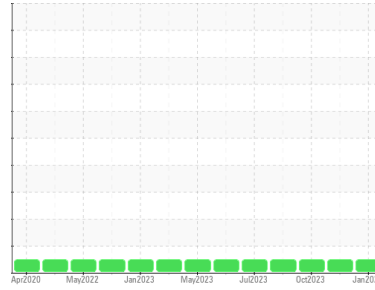

**NORMAL**



Machine Id  
**820015-101299**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0099274</b>	GFL0078288	GFL0080050
Sample Date	Client Info	<b>08 Jan 2024</b>	02 Jan 2024	04 Oct 2023
Machine Age	hrs	<b>18383</b>	18333	17808
Oil Age	hrs	<b>0</b>	0	228
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>26</b>	19	35
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>13</b>	12	26
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>1</b>	<1	11
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	2	8
Barium	ppm ASTM D5185m 0	<b>0</b>	0	12
Molybdenum	ppm ASTM D5185m 60	<b>66</b>	62	34
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	2
Magnesium	ppm ASTM D5185m 1010	<b>1042</b>	1028	853
Calcium	ppm ASTM D5185m 1070	<b>1156</b>	1122	1148
Phosphorus	ppm ASTM D5185m 1150	<b>1054</b>	1187	846
Zinc	ppm ASTM D5185m 1270	<b>1343</b>	1442	1023
Sulfur	ppm ASTM D5185m 2060	<b>2990</b>	3211	2795

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	3	20
Sodium	ppm ASTM D5185m	<b>3</b>	5	3
Potassium	ppm ASTM D5185m >20	<b>23</b>	18	73

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>10.0</b>	9.3	8.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.4</b>	21.3	22.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.3</b>	18.5	18.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.0</b>	5.6	6.9







# OIL ANALYSIS REPORT

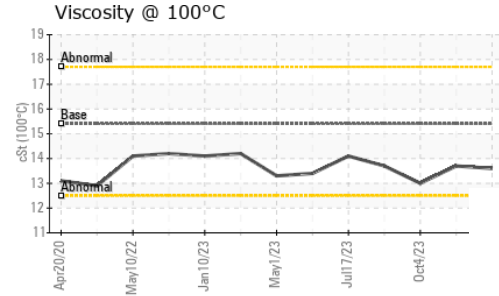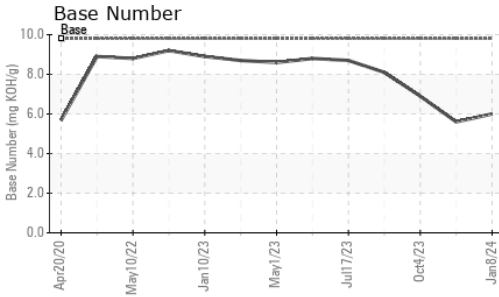

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.7	13.0

## GRAPHS

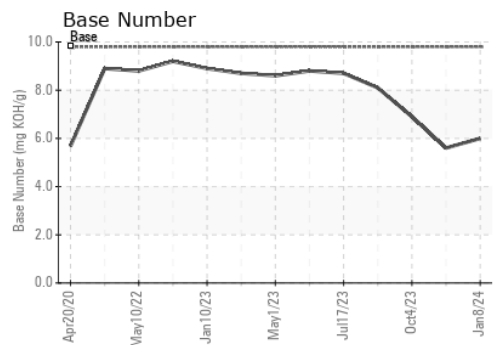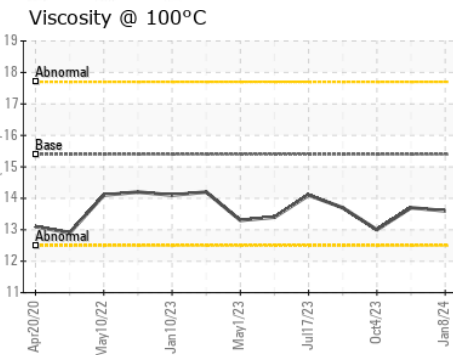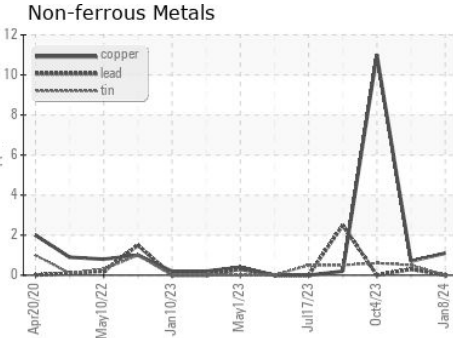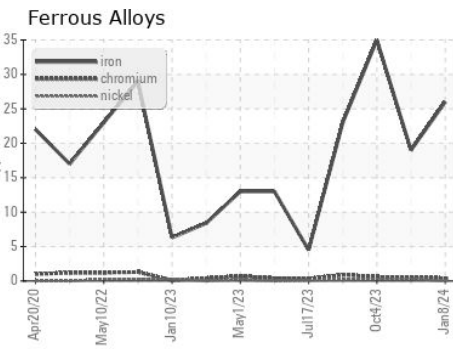

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0099274 **Recieved** : 12 Jan 2024  
**Lab Number** : 06059897 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10831279 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 844 - Princeton Hauling**  
 10129 Highway 62 West  
 Princeton, KY  
 US 42445  
**Contact: ROBERT THIBAUT**  
 robert.thibault@gflenv.com  
 T: (931)237-6045  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)