




PROBLEM SUMMARY

Sample Rating Trend

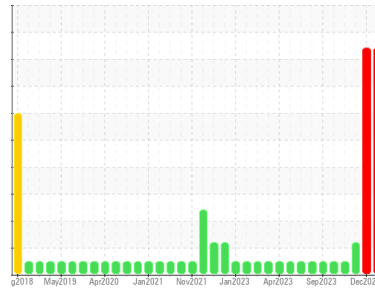


GLYCOL



Machine Id
10867
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (40 GAL)

COMPONENT CONDITION SUMMARY

Glycol Contamination

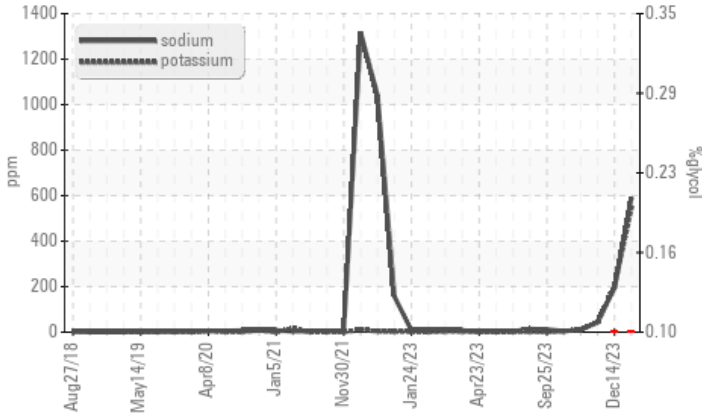

RECOMMENDATION

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	ABNORMAL
Potassium	ppm	ASTM D5185m	>20	▲ 544	▲ 200	▲ 44
Glycol	%	*ASTM D2982		● 0.10	● 0.10	NEG

Customer Id: GFL084
 Sample No.: GFL0098968
 Lab Number: 06064009
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Flush System	---	---	?	We advise that you flush the component thoroughly before re-filling with oil.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

14 Dec 2023 Diag: Wes Davis

GLYCOL



We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition. All component wear rates are normal. Test for glycol is positive. There is a high concentration of glycol present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

view report



29 Nov 2023 Diag: Jonathan Hester

GLYCOL



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



06 Nov 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

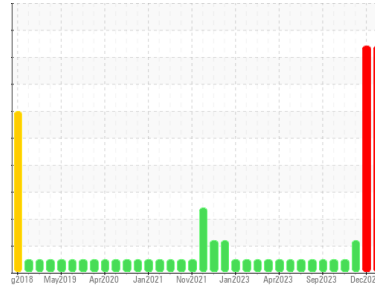

GLYCOL



Machine Id
10867

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (40 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Test for glycol is positive. There is a high concentration of glycol present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0098968	GFL0099012	GFL0098983
Sample Date	Client Info		06 Jan 2024	14 Dec 2023	29 Nov 2023
Machine Age	hrs	Client Info	13230	213058	211373
Oil Age	hrs	Client Info	13230	204515	204515
Oil Changed	Client Info		Not Chngd	N/A	Not Chngd
Sample Status			SEVERE	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>75	17	24	26
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	3	4
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>100	<1	<1	1
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	<1	0
Barium	ppm	ASTM D5185m	0	3	0	5
Molybdenum	ppm	ASTM D5185m	60	82	63	71
Manganese	ppm	ASTM D5185m	0	0	0	0
Magnesium	ppm	ASTM D5185m	1010	907	912	1014
Calcium	ppm	ASTM D5185m	1070	1170	1098	1194
Phosphorus	ppm	ASTM D5185m	1150	1028	939	1129
Zinc	ppm	ASTM D5185m	1270	1178	1195	1318
Sulfur	ppm	ASTM D5185m	2060	3622	2723	3313

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	7	7	9
Sodium	ppm	ASTM D5185m		590	196	45
Potassium	ppm	ASTM D5185m	>20	544	200	44
Glycol	%	*ASTM D2982		0.10	0.10	NEG

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	0.3	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.8	9.3	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	20.1	19.4


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	15.6	15.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	11.1	8.9	7.2




OIL ANALYSIS REPORT


Glycol Contamination

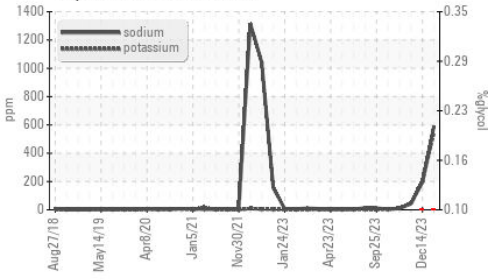

Base Number

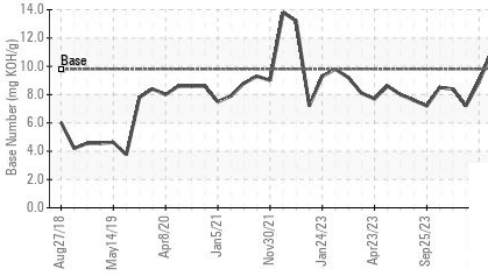

Viscosity @ 100°C

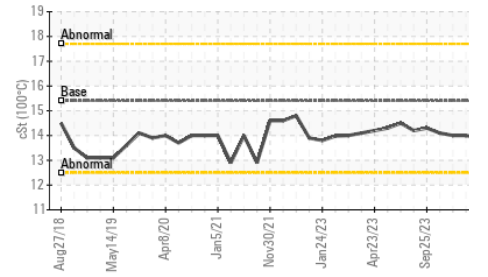


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.9

GRAPHS


Ferrous Alloys

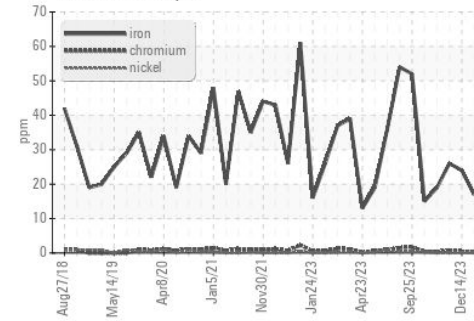


Non-ferrous Metals

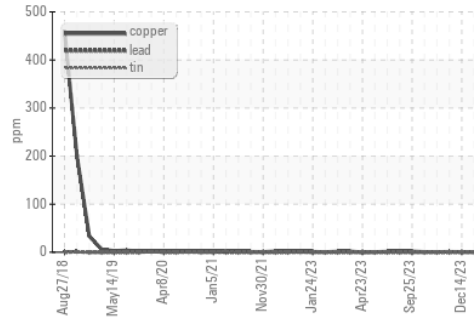

Viscosity @ 100°C

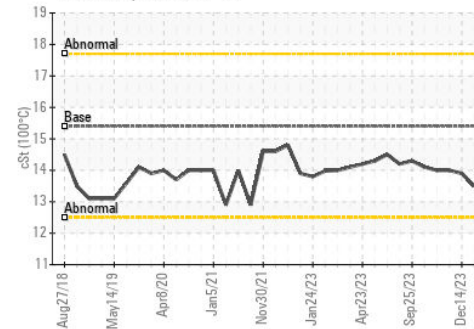

Base Number

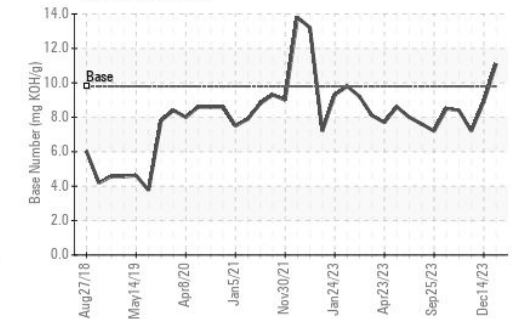

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0098968 **Received** : 18 Jan 2024
Lab Number : 06064009 **Diagnosed** : 19 Jan 2024
Unique Number : 10835391 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 084 - Clarksville
 699 Jack Miller Boulevard
 Clarksville, TN
 US 37042
Contact: ROBERT THIBAUT
 robert.thibault@gflenv.com
 T: (931)552-7276
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)