




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

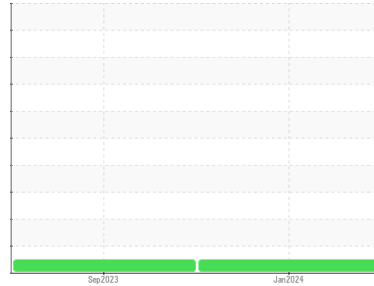

Machine Id  
**526090**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0108167</b>	GFL0087704	---
Sample Date	Client Info	<b>11 Jan 2024</b>	04 Sep 2023	---
Machine Age	hrs	Client Info	<b>11302</b>	265422
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>Not Changed</b>	Changed	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method >0.2	<b>NEG</b>	NEG	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>35</b>	75	---
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	---
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	---
Titanium	ppm ASTM D5185m	<b>0</b>	0	---
Silver	ppm ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm ASTM D5185m >30	<b>5</b>	8	---
Lead	ppm ASTM D5185m >30	<b>&lt;1</b>	<1	---
Copper	ppm ASTM D5185m >150	<b>4</b>	4	---
Tin	ppm ASTM D5185m >5	<b>0</b>	0	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>22</b>	112	---
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	---
Molybdenum	ppm ASTM D5185m 60	<b>67</b>	102	---
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm ASTM D5185m 1010	<b>914</b>	643	---
Calcium	ppm ASTM D5185m 1070	<b>1088</b>	1479	---
Phosphorus	ppm ASTM D5185m 1150	<b>1011</b>	791	---
Zinc	ppm ASTM D5185m 1270	<b>1195</b>	945	---
Sulfur	ppm ASTM D5185m 2060	<b>3206</b>	4109	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>10</b>	10	---
Sodium	ppm ASTM D5185m	<b>3</b>	6	---
Potassium	ppm ASTM D5185m >20	<b>4</b>	7	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.1</b>	0.1	---
Nitration	Abs/cm *ASTM D7624 >20	<b>6.4</b>	7.8	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.8</b>	17.3	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.1</b>	14.1	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.5</b>	7.4	---







# OIL ANALYSIS REPORT

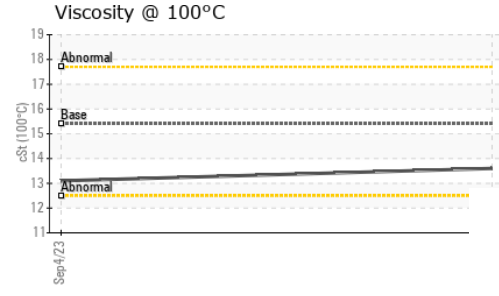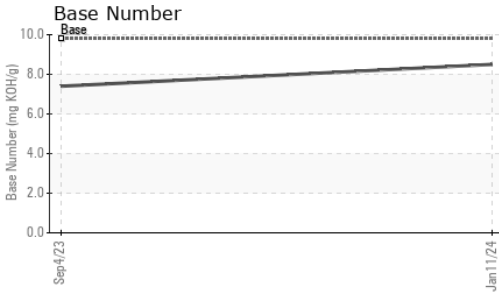

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.1	---

### GRAPHS

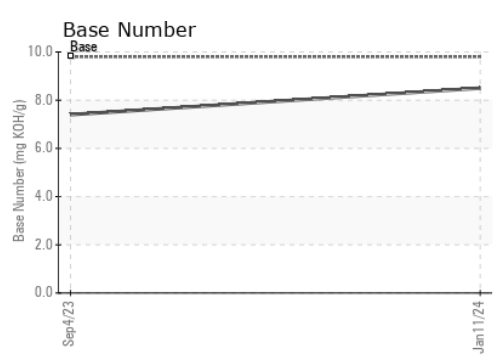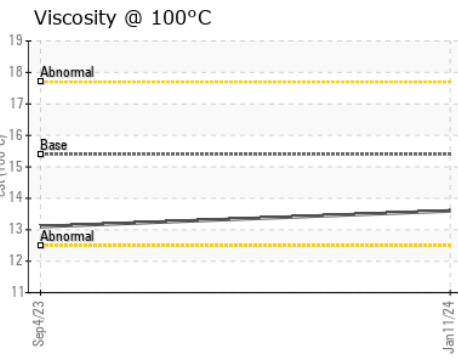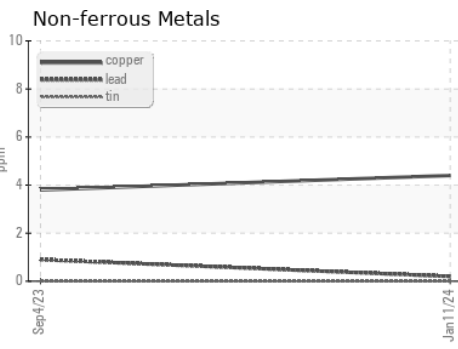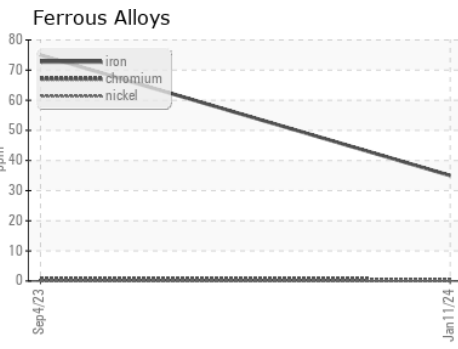

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108167 **Received** : 18 Jan 2024  
**Lab Number** : 06064740 **Diagnosed** : 19 Jan 2024  
**Unique Number** : 10836122 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 975 - Houston East Hwy 3 - East**  
 10200 Old Galveston Rd 974  
 Houston, TX  
 US 77034  
 Contact: Jorge Tamez  
 jtamez@gflenv.com  
 T: (832)405-4630  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)