


OIL ANALYSIS REPORT



Area
KEMP QUARRIES / MUSKOGEE SAND [68122]
Machine Id
WLO42
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

Sample Rating Trend

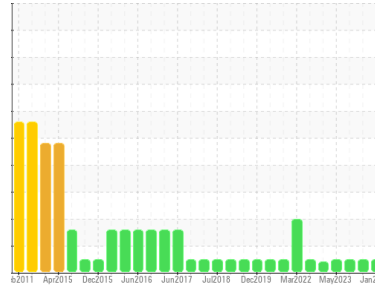

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: PM-2 changed filters)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0086509	PCA0087008	PCA0084618
Sample Date	Client Info		11 Jan 2024	24 Oct 2023	11 Jul 2023
Machine Age	hrs	Client Info	33041	33553	32072
Oil Age	hrs	Client Info	33041	33553	32072
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	9	2	6
Chromium	ppm	ASTM D5185m >10	1	<1	2
Nickel	ppm	ASTM D5185m >10	<1	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	1	<1	1
Lead	ppm	ASTM D5185m >10	0	0	<1
Copper	ppm	ASTM D5185m >75	2	2	7
Tin	ppm	ASTM D5185m >10	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	<1	2
Barium	ppm	ASTM D5185m 0	0	19	0
Molybdenum	ppm	ASTM D5185m 0	0	1	2
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 0	10	6	31
Calcium	ppm	ASTM D5185m 50	74	76	239
Phosphorus	ppm	ASTM D5185m 330	358	364	431
Zinc	ppm	ASTM D5185m 430	469	444	544
Sulfur	ppm	ASTM D5185m 760	888	1188	1375


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	3	1	2
Sodium	ppm	ASTM D5185m	0	2	1
Potassium	ppm	ASTM D5185m >20	<1	0	3

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT








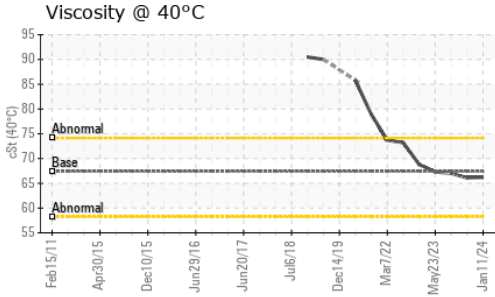


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	67.4	66.2	66.1	67.0

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

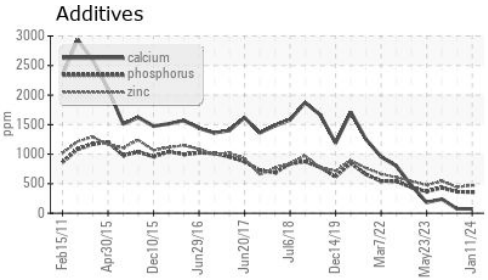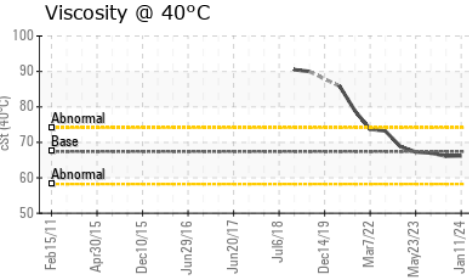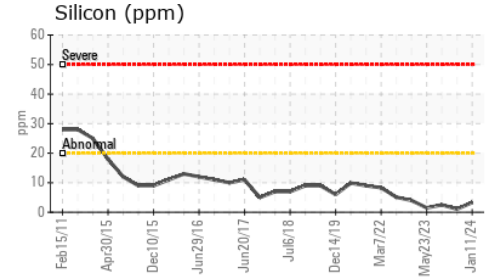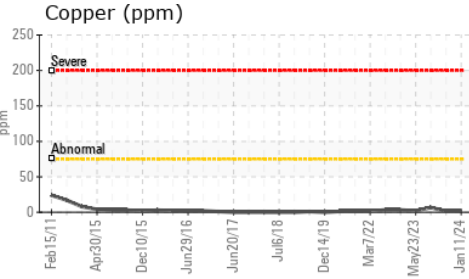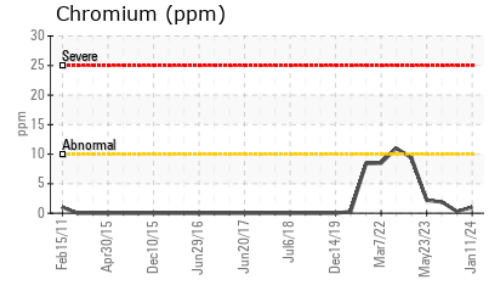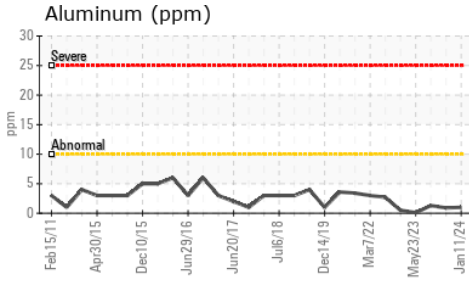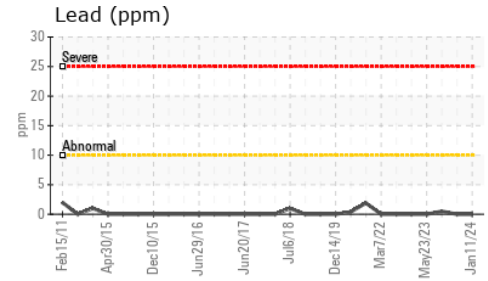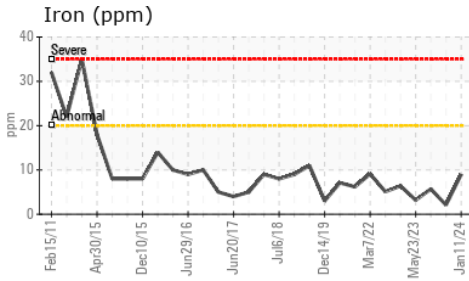

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086509 **Received** : 22 Jan 2024
Lab Number : 06068048 **Diagnosed** : 24 Jan 2024
Unique Number : 10844725 **Diagnostician** : Don Baldridge
Test Package : MOB 1

Kemp Quarries - Muskogee Sand
 3395 W 50th St N
 Porter, OK
 US 74454
 Contact: MUSCOGEE NOTIFICATIONS
 muskogee@muskogeessand.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: