


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

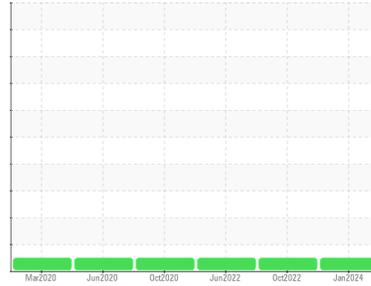

Area  
**FLEET**  
 Machine Id  
**INTERNATIONAL 2026765 (S/N 3HSHXSNR5GN058969)**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0113709</b>	PCA0080200	PCA0074879
Sample Date	Client Info		<b>18 Jan 2024</b>	21 Oct 2022	09 Jun 2022
Machine Age	mls	Client Info	<b>298508</b>	284893	265653
Oil Age	mls	Client Info	<b>15380</b>	19240	12471
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>37</b>	15	18
Chromium	ppm	ASTM D5185m >20	<b>3</b>	2	2
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	3	3
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>3</b>	<1	2
Tin	ppm	ASTM D5185m >15	<b>2</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>2</b>	0	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	57	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>1016</b>	952	948
Calcium	ppm	ASTM D5185m 1050	<b>1261</b>	1137	1113
Phosphorus	ppm	ASTM D5185m 995	<b>1032</b>	990	1066
Zinc	ppm	ASTM D5185m 1180	<b>1248</b>	1266	1261
Sulfur	ppm	ASTM D5185m 2600	<b>3193</b>	3414	3269

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	5	6
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	2
Potassium	ppm	ASTM D5185m >20	<b>8</b>	2	0



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.9</b>	0.5	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.8</b>	9.4	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.8</b>	20.3	18.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.5</b>	15.8	14.7
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.0</b>	9.1	9.6





# OIL ANALYSIS REPORT

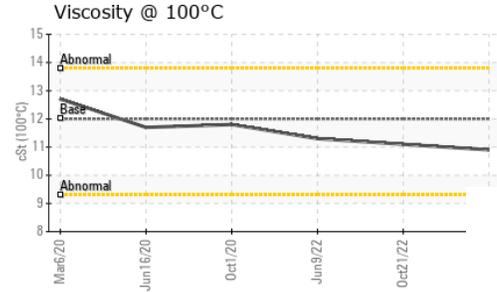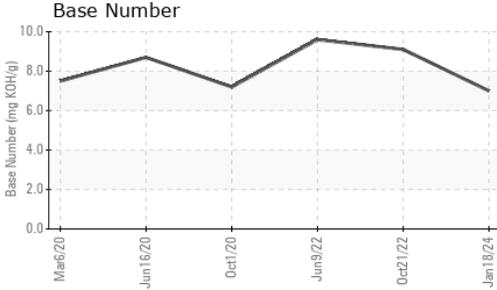

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.9</b>	11.1	11.3

## GRAPHS

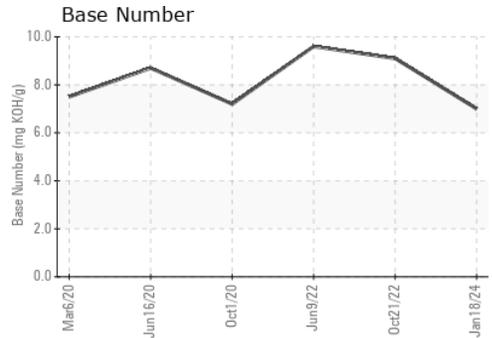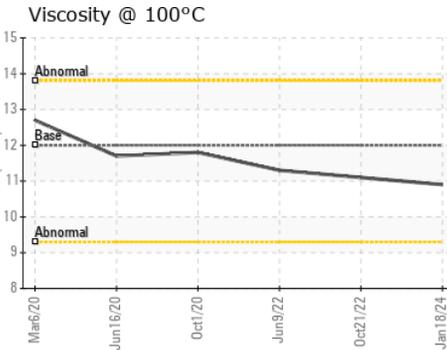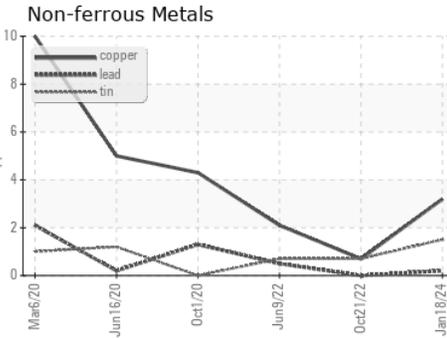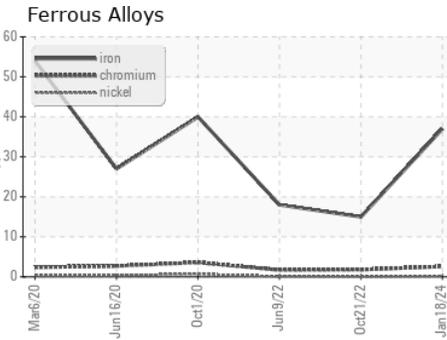

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0113709 **Received** : 25 Jan 2024  
**Lab Number** : **06070294** **Diagnosed** : 25 Jan 2024  
**Unique Number** : 10846971 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - ACCOMAC**  
 22520 LANKFORD HWY  
 ACCOMAC, VA  
 US 23301  
 Contact: PEGGY KIMES  
 peggy.kimes@perdue.com  
 T: (757)787-5304  
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)