


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

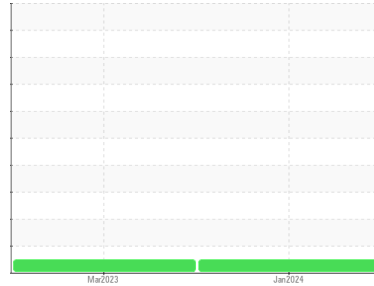

Area
(31656PC) Feldman Lumber-Tractor
 Machine Id
[Feldman Lumber-Tractor] 196D238
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0106076	PCA0091119	---
Sample Date	Client Info			25 Jan 2024	09 Mar 2023	---
Machine Age	mls	Client Info		126185	116856	---
Oil Age	mls	Client Info		9329	3743	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	10	15	---
Chromium	ppm	ASTM D5185m	>5	<1	1	---
Nickel	ppm	ASTM D5185m	>2	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>30	7	9	---
Lead	ppm	ASTM D5185m	>30	0	0	---
Copper	ppm	ASTM D5185m	>150	7	2	---
Tin	ppm	ASTM D5185m	>5	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	131	19	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	50	33	61	---
Manganese	ppm	ASTM D5185m	0	<1	<1	---
Magnesium	ppm	ASTM D5185m	950	363	816	---
Calcium	ppm	ASTM D5185m	1050	1643	1122	---
Phosphorus	ppm	ASTM D5185m	995	962	928	---
Zinc	ppm	ASTM D5185m	1180	1139	1117	---
Sulfur	ppm	ASTM D5185m	2600	3080	2848	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	4	4	---
Sodium	ppm	ASTM D5185m		4	3	---
Potassium	ppm	ASTM D5185m	>20	8	8	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	7.5	7.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	18.2	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.9	13.3	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.9	8.8	---





OIL ANALYSIS REPORT

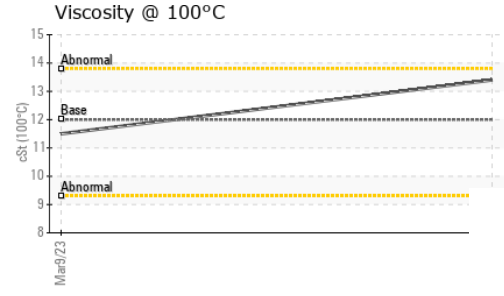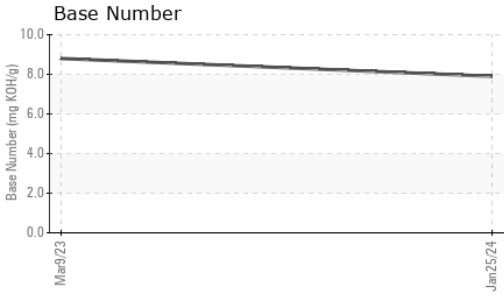

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	13.4	11.5	---

GRAPHS

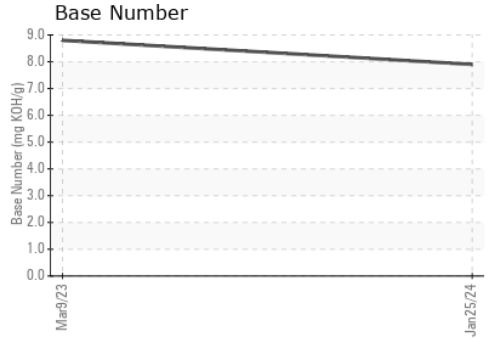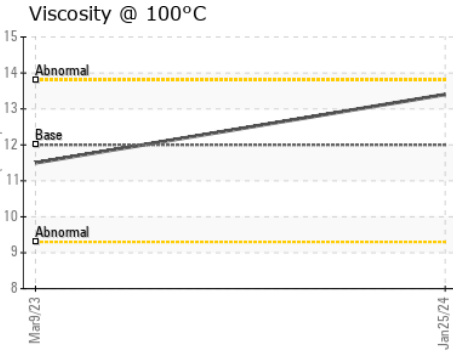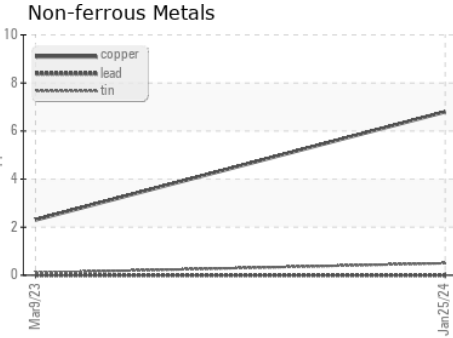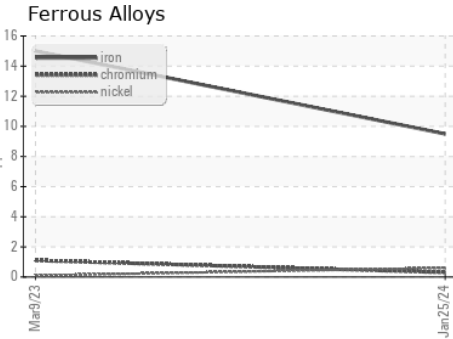

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106076 **Received** : 30 Jan 2024
Lab Number : **06073662** **Diagnosed** : 31 Jan 2024
Unique Number : 10850339 **Diagnostician** : Don Baldrige
Test Package : FLEET

Transervice - Shop 1960 - Feldman Lumber Service
 1281 Metropolitan Avenue
 Brooklyn, NY
 US 11237
 Contact: Marc Fried
 mrfried@transervice.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)