




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

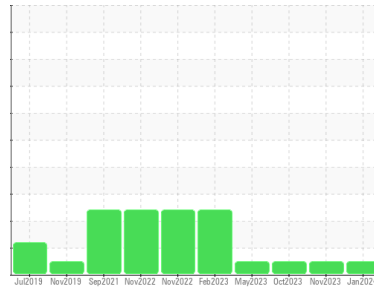

Machine Id  
**426095-402344**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0109207</b>	GFL0098307	GFL0079351
Sample Date	Client Info	<b>27 Jan 2024</b>	14 Nov 2023	02 Oct 2023
Machine Age	hrs	<b>13415</b>	13285	13181
Oil Age	hrs	<b>150</b>	700	586
Oil Changed	Client Info	<b>Not Changed</b>	Changed	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>14</b>	10	38
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>2</b>	<1	1
Lead	ppm ASTM D5185m >45	<b>2</b>	2	14
Copper	ppm ASTM D5185m >85	<b>1</b>	<1	2
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	2
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>12</b>	<1	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	59	66
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>957</b>	989	1032
Calcium	ppm ASTM D5185m 1070	<b>1054</b>	1054	1135
Phosphorus	ppm ASTM D5185m 1150	<b>1030</b>	1074	1062
Zinc	ppm ASTM D5185m 1270	<b>1268</b>	1274	1341
Sulfur	ppm ASTM D5185m 2060	<b>3094</b>	3109	3057

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>8</b>	3	5
Sodium	ppm ASTM D5185m	<b>2</b>	2	3
Potassium	ppm ASTM D5185m >20	<b>3</b>	0	0
Fuel	% ASTM D3524 >5	<b>0.7</b>	<1.0	<1.0

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.6</b>	0.2	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>7.2</b>	6.8	10.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.6</b>	19.0	22.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.2</b>	15.3	20.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.2</b>	8.5	7.6







# OIL ANALYSIS REPORT

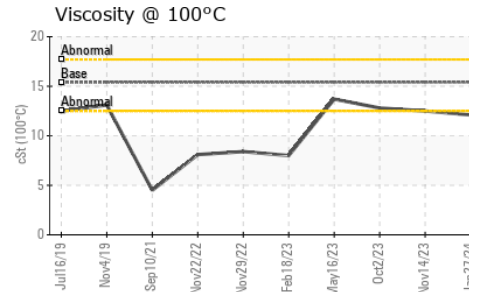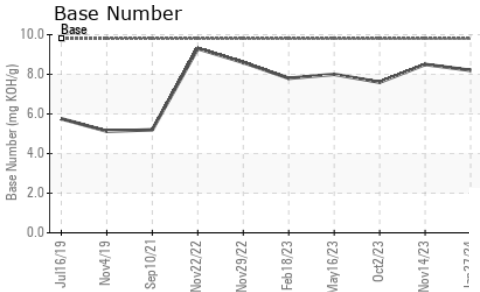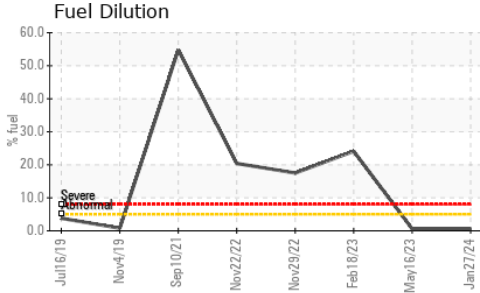

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.1	12.5

## GRAPHS

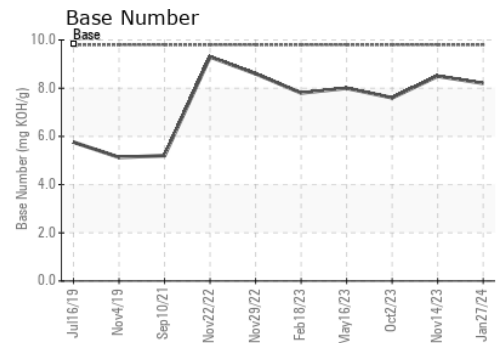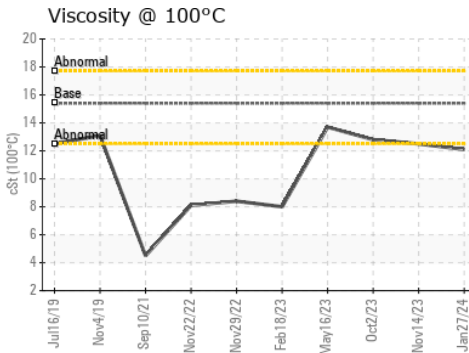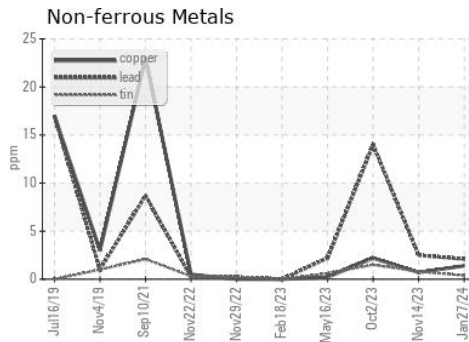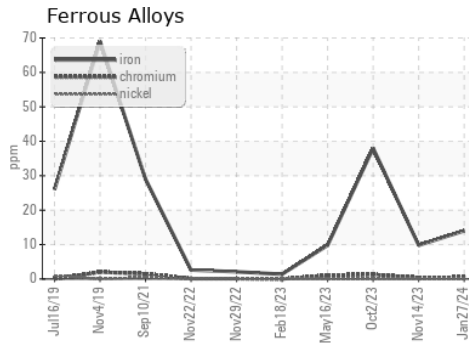

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0109207 Received : 06 Feb 2024  
 Lab Number : 06081101 Tested : 08 Feb 2024  
 Unique Number : 10863192 Diagnosed : 08 Feb 2024 - Wes Davis  
 Test Package : FLEET ( Additional Tests: FuelDilution, PercentFuel )

GFL Environmental - 822 - Springfield Hauling  
 2120 West Bennett Street  
 Springfield, MO  
 US 65807  
 Contact: Dennis Moore  
 dennis.moore@gflenv.com  
 T: (417)403-3641  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)