




# OIL ANALYSIS REPORT

Sample Rating Trend

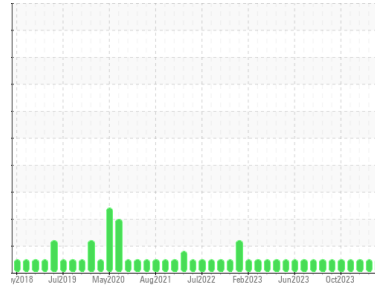

**NORMAL**



Machine Id  
**10457**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (13 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0107166</b>	GFL0107198	GFL0107217
Sample Date	Client Info		<b>05 Feb 2024</b>	17 Jan 2024	03 Jan 2024
Machine Age	hrs	Client Info	<b>1809</b>	1657	1574
Oil Age	hrs	Client Info	<b>152</b>	523	392
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>6</b>	2	9
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	<1	3
Lead	ppm	ASTM D5185m >150	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >90	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>12</b>	6	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	65	58
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>895</b>	1024	927
Calcium	ppm	ASTM D5185m 1070	<b>1036</b>	1104	1004
Phosphorus	ppm	ASTM D5185m 1150	<b>1002</b>	1098	1010
Zinc	ppm	ASTM D5185m 1270	<b>1232</b>	1350	1261
Sulfur	ppm	ASTM D5185m 2060	<b>3058</b>	3441	3057

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m	<b>3</b>	1	1
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.2</b>	0.1	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.7</b>	4.5	5.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.6</b>	17.1	17.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.0</b>	12.4	13.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.3</b>	9.0	8.5







# OIL ANALYSIS REPORT

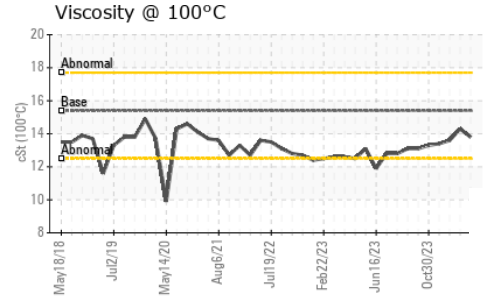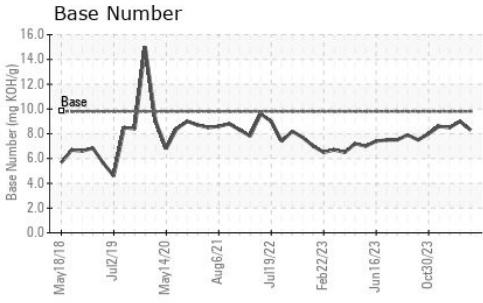

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	14.3	13.6

## GRAPHS

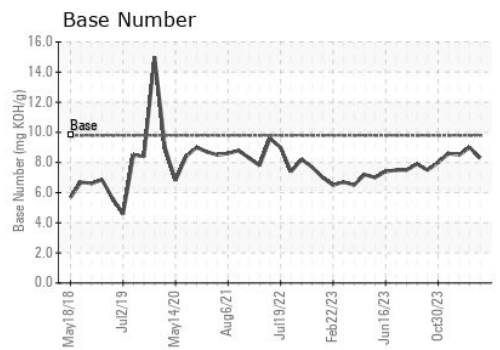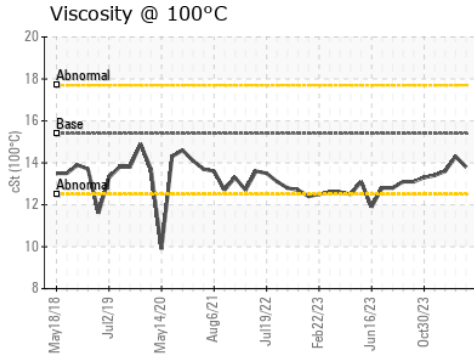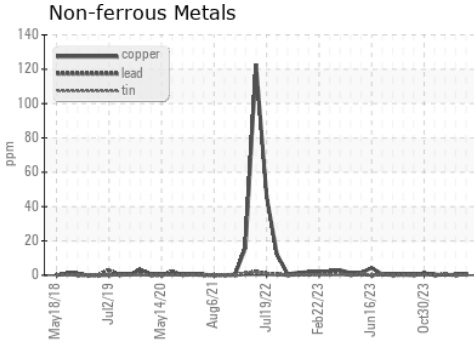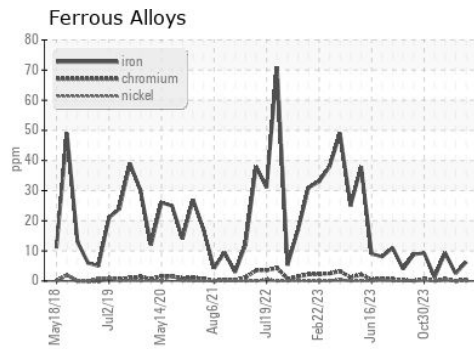

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107166 **Received** : 06 Feb 2024  
**Lab Number** : **06081114** **Diagnosed** : 06 Feb 2024  
**Unique Number** : 10863205 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)