

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Area  
**(68549Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A624289**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0105887</b>	---	---
Sample Date	Client Info	<b>01 Feb 2024</b>	---	---
Machine Age	mls	Client Info	<b>26764</b>	---
Oil Age	mls	Client Info	<b>0</b>	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	---	---
Water	WC Method >0.2	<b>NEG</b>	---	---
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>36</b>	---	---
Chromium	ppm ASTM D5185m >5	<b>3</b>	---	---
Nickel	ppm ASTM D5185m >2	<b>2</b>	---	---
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm ASTM D5185m >3	<b>1</b>	---	---
Aluminum	ppm ASTM D5185m >30	<b>75</b>	---	---
Lead	ppm ASTM D5185m >30	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185m >150	<b>269</b>	---	---
Tin	ppm ASTM D5185m >5	<b>5</b>	---	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>37</b>	---	---
Barium	ppm ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m 50	<b>41</b>	---	---
Manganese	ppm ASTM D5185m 0	<b>6</b>	---	---
Magnesium	ppm ASTM D5185m 950	<b>520</b>	---	---
Calcium	ppm ASTM D5185m 1050	<b>1588</b>	---	---
Phosphorus	ppm ASTM D5185m 995	<b>741</b>	---	---
Zinc	ppm ASTM D5185m 1180	<b>889</b>	---	---
Sulfur	ppm ASTM D5185m 2600	<b>2170</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>7</b>	---	---
Sodium	ppm ASTM D5185m	<b>8</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>190</b>	---	---



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	---	---
Nitration	Abs/cm *ASTM D7624 >20	<b>8.3</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.5</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>21.0</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896	<b>8.3</b>	---	---





# OIL ANALYSIS REPORT

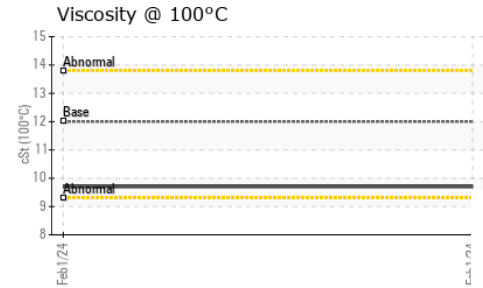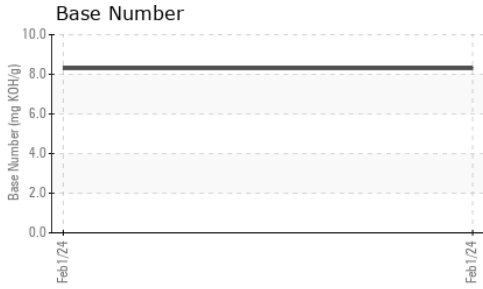

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>9.7</b>	---	---

## GRAPHS

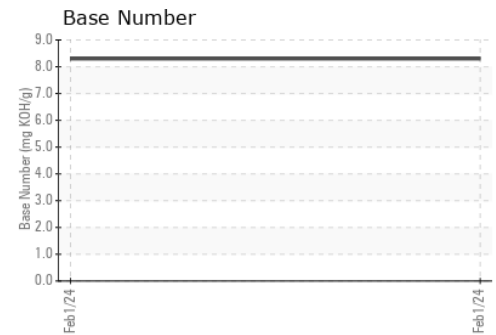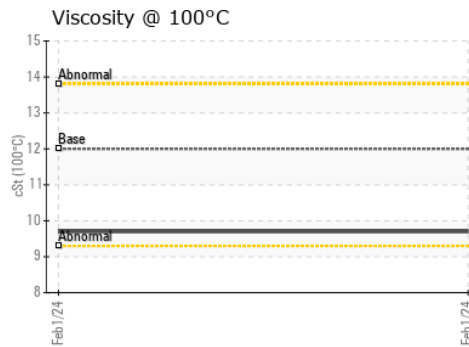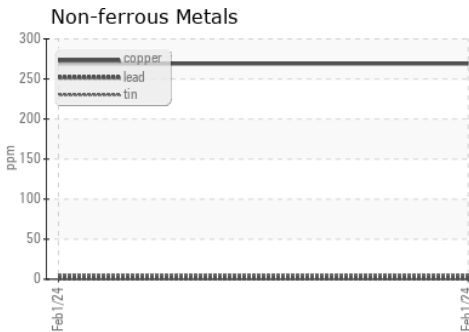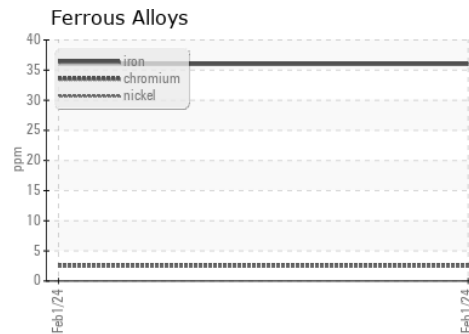

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105887  
**Lab Number** : **06081926**  
**Unique Number** : 10869371  
**Test Package** : FLEET  
**Received** : 06 Feb 2024  
**Tested** : 07 Feb 2024  
**Diagnosed** : 08 Feb 2024 - Sean Felton

**Transervice - Shop 1361 - Berkeley-Windsor**  
 4400 State Road 19  
 Windsor, WI  
 US 53598  
 Contact: Mike Hurda  
 mhurda@transervice.com  
 T: (608)846-2726  
 F: (608)846-0389

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)