


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

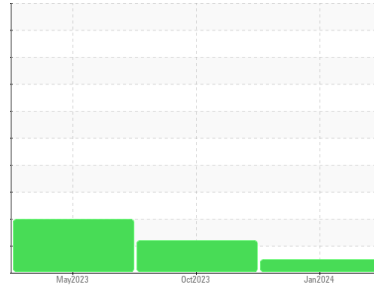

Area  
**KEMP QUARRIES / RVM - ARKOMA**  
 Machine Id  
**WL150**  
 Component  
**Hydraulic System**  
 Fluid  
**PETRO CANADA HYDREX AW 68 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0084477</b>	PCA0084200	PCA0085736
Sample Date	Client Info		<b>30 Jan 2024</b>	24 Oct 2023	16 May 2023
Machine Age	hrs	Client Info	<b>34346</b>	33859	33313
Oil Age	hrs	Client Info	<b>33859</b>	33313	33313
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	N/A
Sample Status			<b>NORMAL</b>	ATTENTION	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>4</b>	4	11
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>3</b>	2	2
Lead	ppm	ASTM D5185m >10	<b>2</b>	<1	1
Copper	ppm	ASTM D5185m >75	<b>3</b>	3	8
Tin	ppm	ASTM D5185m >10	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>3</b>	0	<1
Manganese	ppm	ASTM D5185m 0	<b>1</b>	0	<1
Magnesium	ppm	ASTM D5185m 0	<b>11</b>	9	8
Calcium	ppm	ASTM D5185m 50	<b>513</b>	▲ 1278	▲ 2840
Phosphorus	ppm	ASTM D5185m 330	<b>462</b>	601	▲ 823
Zinc	ppm	ASTM D5185m 430	<b>548</b>	737	▲ 995
Sulfur	ppm	ASTM D5185m 760	<b>1220</b>	▲ 1916	▲ 3129


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	6	14
Sodium	ppm	ASTM D5185m	<b>0</b>	1	0
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	2

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








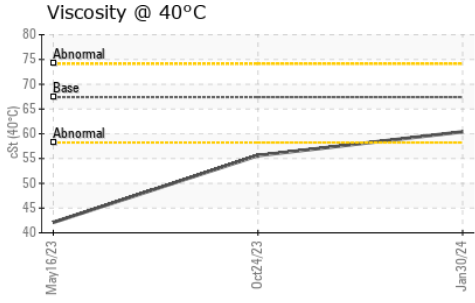


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	67.4	<b>60.4</b>	▲ 55.6	▲ 42.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

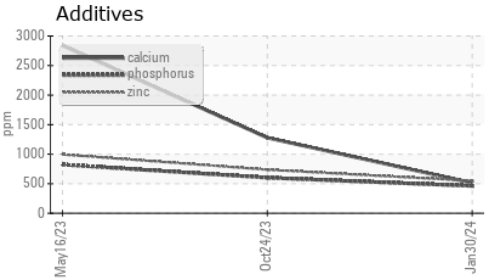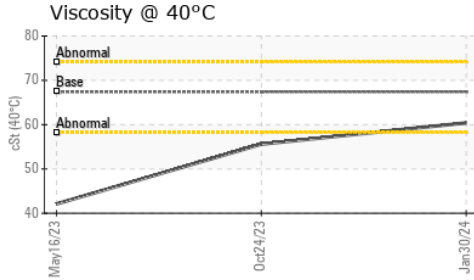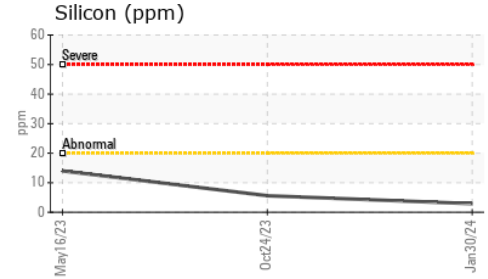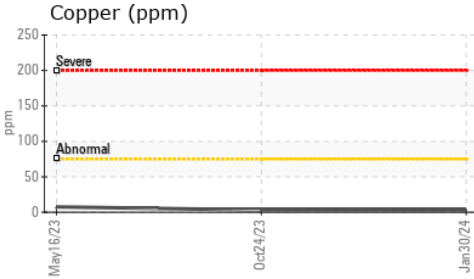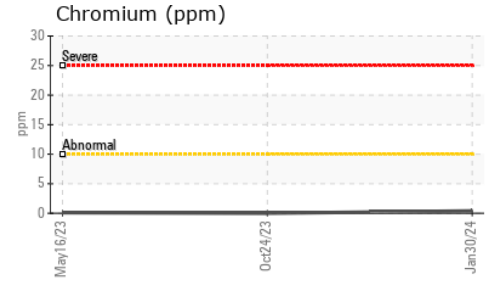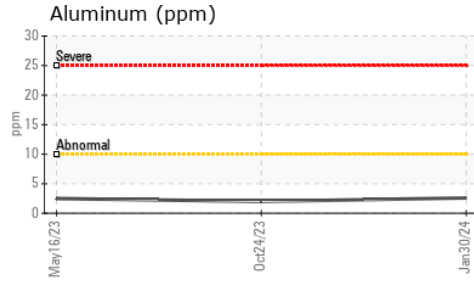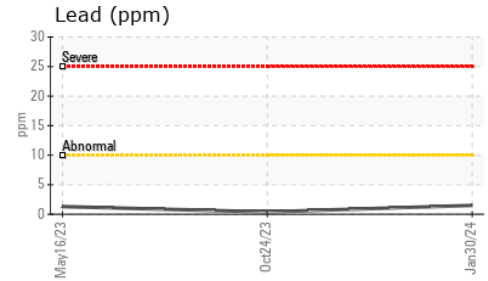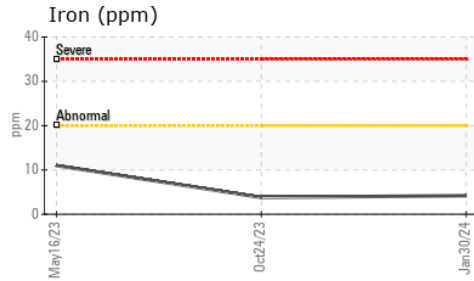

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0084477  
**Lab Number** : **06082139**  
**Unique Number** : 10869584  
**Test Package** : MOB 1

**Received** : 06 Feb 2024  
**Tested** : 07 Feb 2024  
**Diagnosed** : 07 Feb 2024 - Wes Davis

**Kemp Quarries - River Valley - Arkoma**  
 12971 HWY 9a  
 Shawnee, OK  
 US 74804

Contact: arkomashop@kempquarries.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: