




OIL ANALYSIS REPORT

Sample Rating Trend

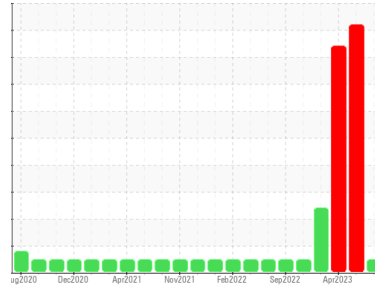

NORMAL



Area
(YA156314) GFL035
 Machine Id
810011

Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (38 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

No evidence of coolant present in the oil. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0102355	GFL0071625	GFL0053147
Sample Date	Client Info	01 Feb 2024	10 Oct 2023	12 Apr 2023
Machine Age	hrs	440	440	440
Oil Age	hrs	600	600	600
Oil Changed	Client Info	Not Chngd	Changed	Changed
Sample Status		NORMAL	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	4	35	23
Chromium	ppm ASTM D5185m >5	<1	1	<1
Nickel	ppm ASTM D5185m >4	0	3	0
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	3	1	2
Lead	ppm ASTM D5185m >25	0	<1	0
Copper	ppm ASTM D5185m >100	0	▲ 215	<1
Tin	ppm ASTM D5185m >4	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	0	5	9
Barium	ppm ASTM D5185m 10	<1	2	2
Molybdenum	ppm ASTM D5185m 100	59	70	76
Manganese	ppm ASTM D5185m	<1	2	<1
Magnesium	ppm ASTM D5185m 450	944	906	901
Calcium	ppm ASTM D5185m 3000	1078	1046	1102
Phosphorus	ppm ASTM D5185m 1150	1063	991	1019
Zinc	ppm ASTM D5185m 1350	1278	1245	1232
Sulfur	ppm ASTM D5185m 4250	3095	2996	3103

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	2	13	10
Sodium	ppm ASTM D5185m >216	1	▲ 250	▲ 445
Potassium	ppm ASTM D5185m >20	2	▲ 249	▲ 210
Glycol	% *ASTM D2982	NEG	◆ 0.10	◆ 0.10

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.3	0.6	0.5
Nitration	Abs/cm *ASTM D7624 >20	5.9	8.9	8.4
Sulfation	Abs/.1mm *ASTM D7415 >30	17.8	20.8	18.6

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.5	16.2	14.9
Base Number (BN)	mg KOH/g ASTM D2896 8.5	9.0	8.0	8.5







OIL ANALYSIS REPORT

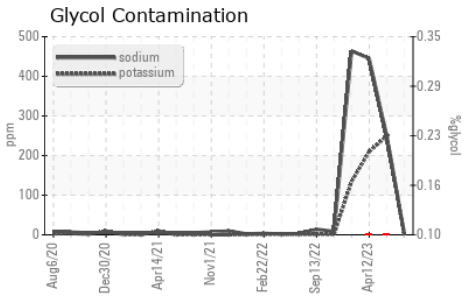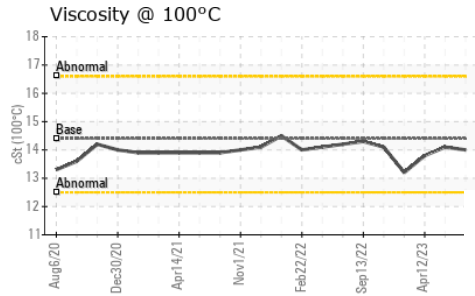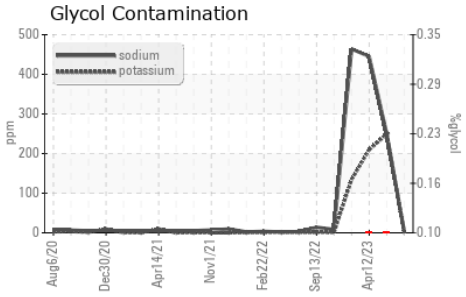

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	14.1	13.8

GRAPHS

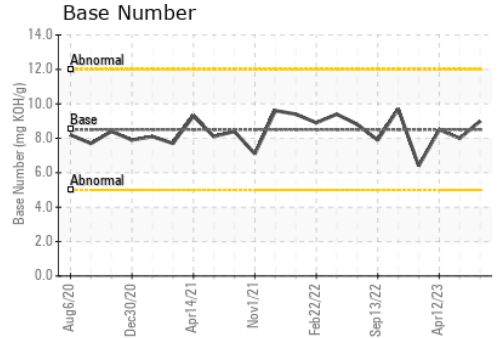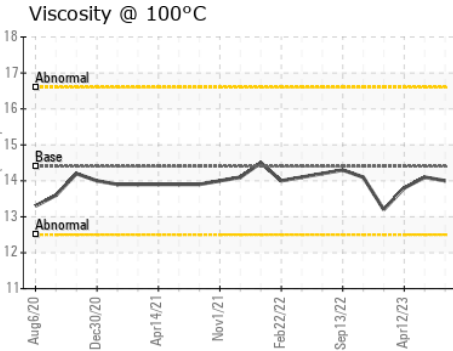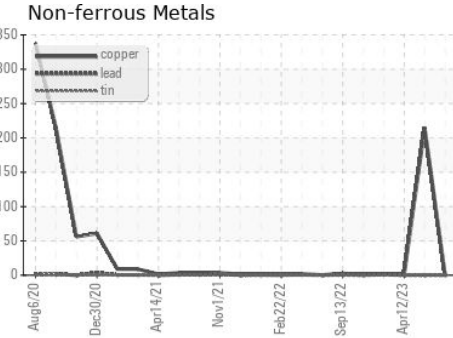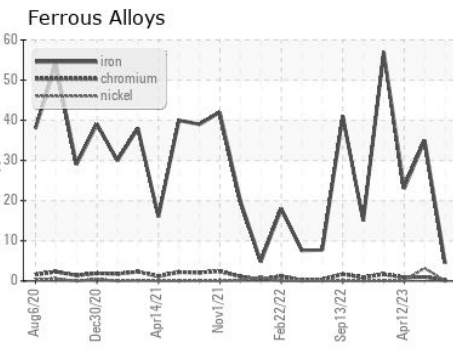

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0102355 **Received** : 08 Feb 2024
Lab Number : 06083451 **Tested** : 12 Feb 2024
Unique Number : 10870896 **Diagnosed** : 12 Feb 2024 - Jonathan Hester
Test Package : FLEET

GFL Environmental - 035 - Greensboro
 1236 Elon Place
 High Point, NC
 US 27263
 Contact: JORGE COSTA
 jorge.costa@gflenv.com
 T: (336)668-3712
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)