

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
ELEVATOR DISTRIBUTION LEG
Machine Id
DISTRIBUTION LEG

Component
Gearbox
Fluid
HYDROTEX Ultra-Kleen ISO 220 (9 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0113080	---	---
Sample Date	Client Info	18 Jan 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	28	---	---
Iron	ppm ASTM D5185m >200	17	---	---
Chromium	ppm ASTM D5185m >15	0	---	---
Nickel	ppm ASTM D5185m >15	0	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m >25	0	---	---
Lead	ppm ASTM D5185m >100	0	---	---
Copper	ppm ASTM D5185m >200	0	---	---
Tin	ppm ASTM D5185m >25	<1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	47	---	---
Barium	ppm ASTM D5185m	0	---	---
Molybdenum	ppm ASTM D5185m	0	---	---
Manganese	ppm ASTM D5185m	<1	---	---
Magnesium	ppm ASTM D5185m	<1	---	---
Calcium	ppm ASTM D5185m	1	---	---
Phosphorus	ppm ASTM D5185m	458	---	---
Zinc	ppm ASTM D5185m	0	---	---
Sulfur	ppm ASTM D5185m	9350	---	---




CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >50	41	---	---
Sodium	ppm ASTM D5185m	0	---	---
Potassium	ppm ASTM D5185m >20	0	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	1.04	---	---

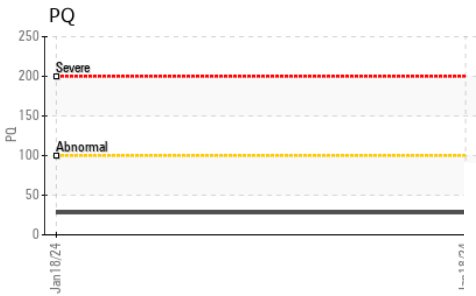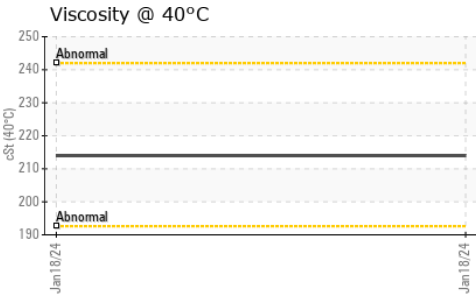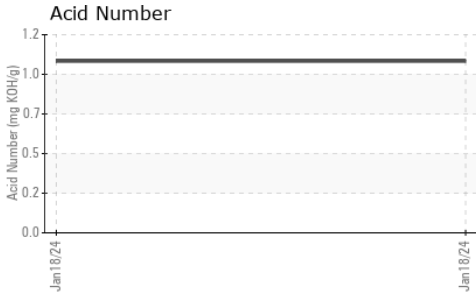

OIL ANALYSIS REPORT








VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	214	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

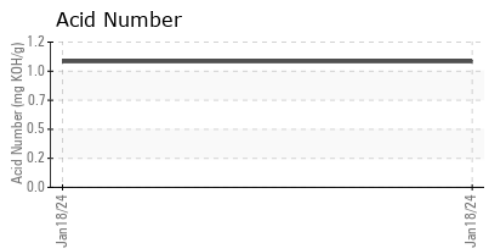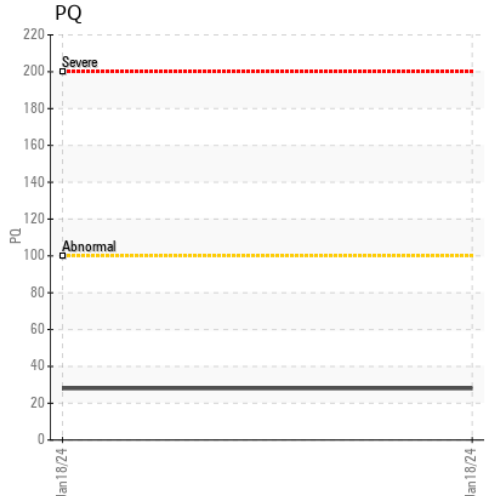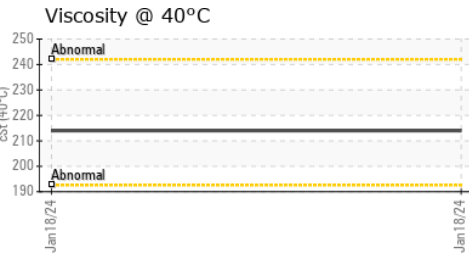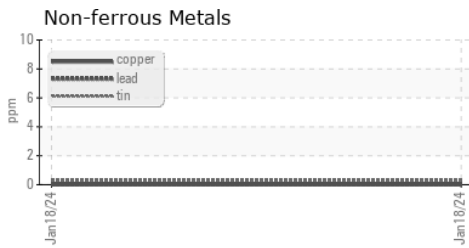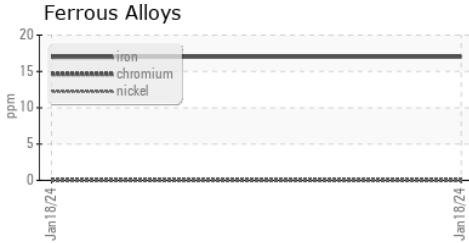

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113080 **Received** : 15 Feb 2024
Lab Number : **06090354** **Tested** : 16 Feb 2024
Unique Number : 10883207 **Diagnosed** : 16 Feb 2024 - Wes Davis
Test Package : PLANT

Ardent Mills - Stockton
 3939 Producers Dr
 Stockton, CA
 US 95206
 Contact: Noel Garcia
 noel.garcia@ardentmills.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: