




# OIL ANALYSIS REPORT

Sample Rating Trend

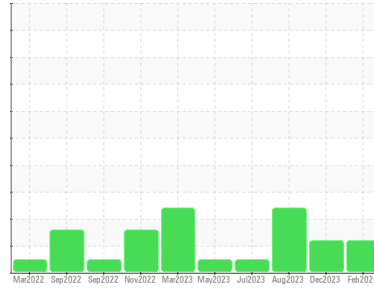

GLYCOL



Machine Id  
**724027-367**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for possible coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels remain high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0100208</b>	GFL0100200	GFL0087868
Sample Date	Client Info	<b>12 Feb 2024</b>	29 Dec 2023	28 Aug 2023
Machine Age	mls	<b>139474</b>	138195	134672
Oil Age	mls	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>41</b>	42	31
Chromium	ppm ASTM D5185m >20	<b>1</b>	<1	2
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>9</b>	8	<b>▲ 16</b>
Lead	ppm ASTM D5185m >40	<b>1</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>127</b>	81	3
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>7</b>	6	17
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	62	71
Manganese	ppm ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>924</b>	1016	971
Calcium	ppm ASTM D5185m 1070	<b>960</b>	1050	1201
Phosphorus	ppm ASTM D5185m 1150	<b>927</b>	1019	1107
Zinc	ppm ASTM D5185m 1270	<b>1226</b>	1293	1414
Sulfur	ppm ASTM D5185m 2060	<b>2653</b>	2970	3768

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>20</b>	22	<b>▲ 26</b>
Sodium	ppm ASTM D5185m	<b>▲ 243</b>	<b>▲ 314</b>	68
Potassium	ppm ASTM D5185m >20	<b>10</b>	11	3
Glycol	% *ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.2	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>8.5</b>	7.9	10.7
Sulfation	Abs.1mm *ASTM D7415 >30	<b>19.7</b>	19.9	21.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs.1mm *ASTM D7414 >25	<b>15.8</b>	15.5	18.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.6</b>	8.8	7.3







# OIL ANALYSIS REPORT

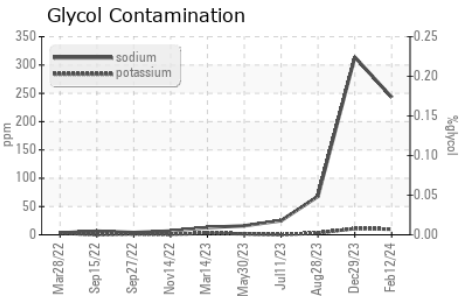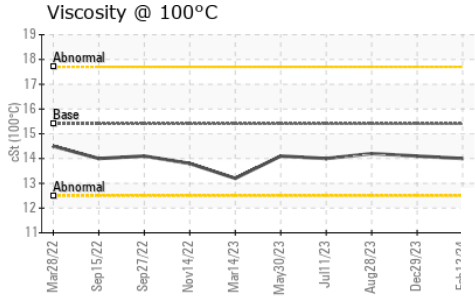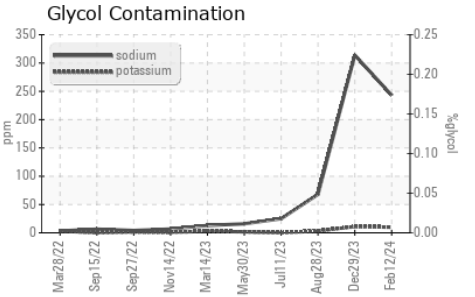

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	14.1	14.2

## GRAPHS

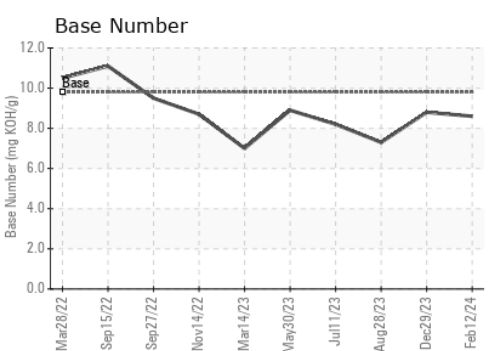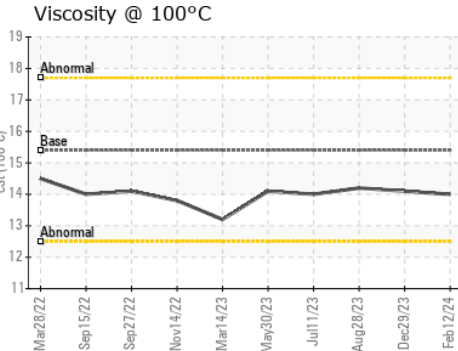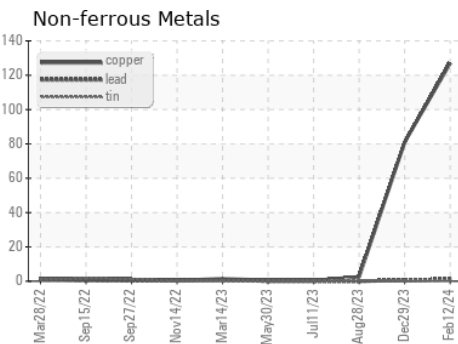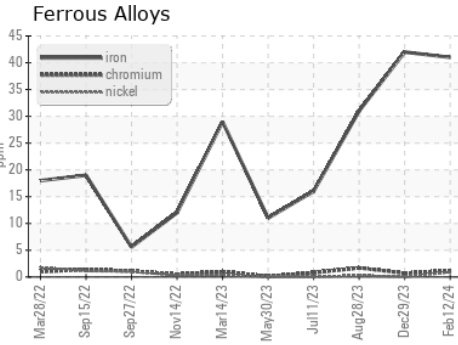

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0100208 **Received** : 16 Feb 2024  
**Lab Number** : 06091464 **Tested** : 20 Feb 2024  
**Unique Number** : 10884317 **Diagnosed** : 20 Feb 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 166 - Phenix City**  
 18 Old Brickyard Rd  
 Phenix City, AL  
 US 36869  
 Contact: EDWARD CASHMAN  
 ecashman@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)