


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
Plymouth & Brockton
 Machine Id
434
 Component
Diesel Engine
 Fluid
 DIESEL ENGINE OIL SAE 40 (36 QTS)

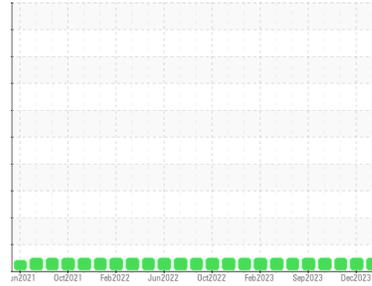

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0110055	PCA0104707	PCA0090723
Sample Date	Client Info		23 Jan 2024	13 Dec 2023	02 Nov 2023
Machine Age	mls	Client Info	282462	268785	257776
Oil Age	mls	Client Info	12000	24000	12000
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	10	19	7
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m >2	0	<1	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	3	<1
Lead	ppm	ASTM D5185m >40	0	0	0
Copper	ppm	ASTM D5185m >330	<1	<1	0
Tin	ppm	ASTM D5185m >15	0	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	8	<1	4
Barium	ppm	ASTM D5185m 10	3	0	0
Molybdenum	ppm	ASTM D5185m 100	63	61	57
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m 450	855	959	884
Calcium	ppm	ASTM D5185m 3000	1094	1146	1066
Phosphorus	ppm	ASTM D5185m 1150	968	1018	912
Zinc	ppm	ASTM D5185m 1350	1127	1248	1215
Sulfur	ppm	ASTM D5185m 4250	3303	3328	2926

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	4	3
Sodium	ppm	ASTM D5185m >216	0	0	<1
Potassium	ppm	ASTM D5185m >20	2	<1	0



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	1.5	2.6	1.4
Nitration	Abs/cm	*ASTM D7624 >20	7.5	10.7	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.0	24.3	21.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.2	16.6	14.9
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	9.45	7.69	9.01









OIL ANALYSIS REPORT

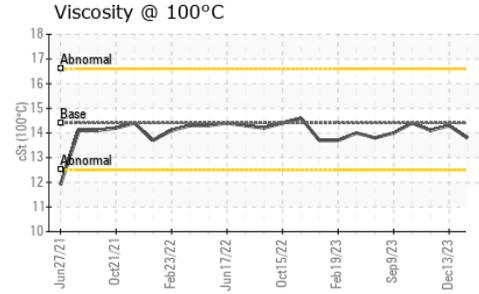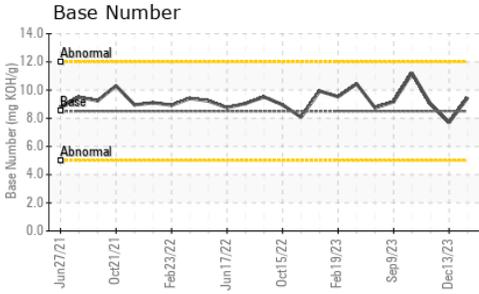

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	14.3	14.1

GRAPHS

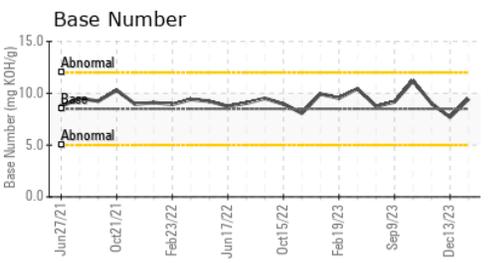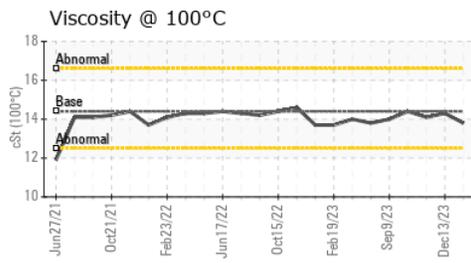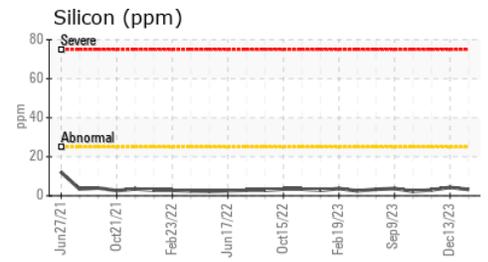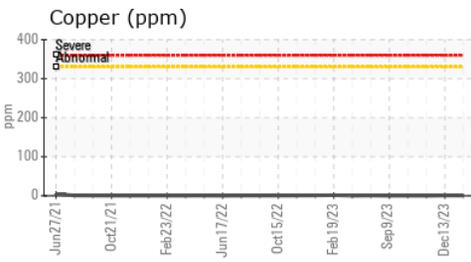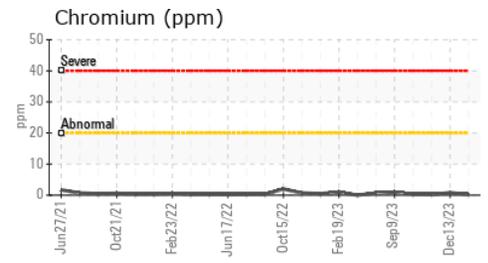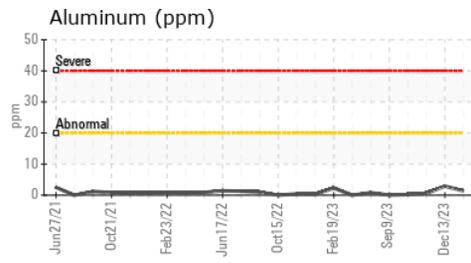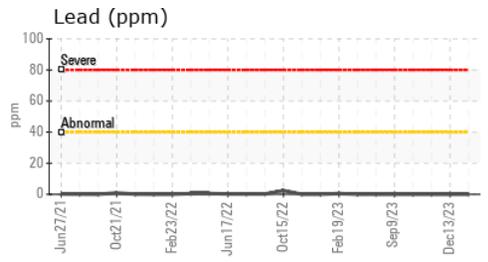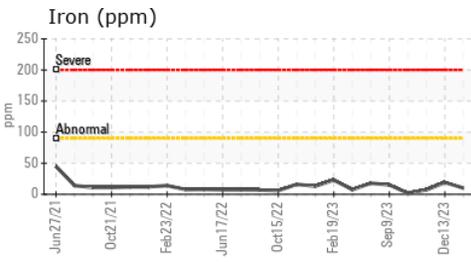

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0110055 **Received** : 20 Feb 2024
Lab Number : 06094382 **Tested** : 21 Feb 2024
Unique Number : 10887235 **Diagnosed** : 21 Feb 2024 - Wes Davis
Test Package : MOB 2

PLYMOUTH & BROCKTON
 8 INDUSTRIAL PARK RD
 PLYMOUTH, MA
 US 02360
 Contact: Donald Pelquin
 Dpelquin@P-B.com
 T: (508)732-6039
 F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)