




# OIL ANALYSIS REPORT

Sample Rating Trend

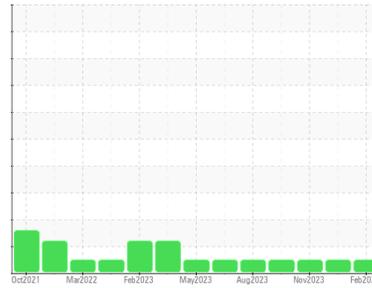

**NORMAL**



Area  
**(H916537)**  
Machine Id  
**427114**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0099026</b>	GFL0098970	GFL0098976
Sample Date	Client Info		<b>12 Feb 2024</b>	04 Jan 2024	14 Nov 2023
Machine Age	hrs	Client Info	<b>18572</b>	18564	18520
Oil Age	hrs	Client Info	<b>18258</b>	18564	18553
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>5</b>	7	7
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	1
Copper	ppm	ASTM D5185m >330	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	3	9
Molybdenum	ppm	ASTM D5185m 60	<b>55</b>	58	60
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>844</b>	960	877
Calcium	ppm	ASTM D5185m 1070	<b>922</b>	1022	1020
Phosphorus	ppm	ASTM D5185m 1150	<b>994</b>	1011	1019
Zinc	ppm	ASTM D5185m 1270	<b>1133</b>	1190	1149
Sulfur	ppm	ASTM D5185m 2060	<b>2889</b>	3494	3389

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	2	5
Sodium	ppm	ASTM D5185m	<b>5</b>	3	5
Potassium	ppm	ASTM D5185m >20	<b>14</b>	17	16

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.0</b>	4.9	4.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.4</b>	17.6	17.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.0</b>	12.9	13.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.0</b>	8.9	9.3







# OIL ANALYSIS REPORT

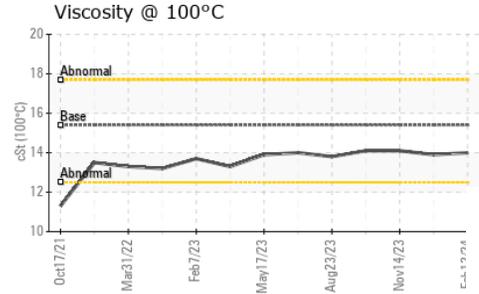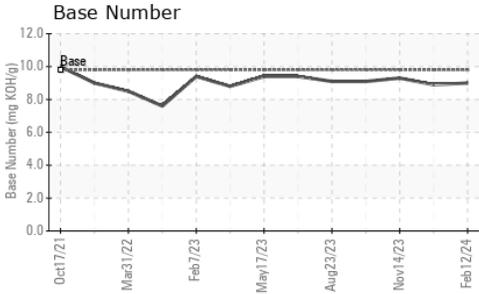

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	13.9	14.1

## GRAPHS

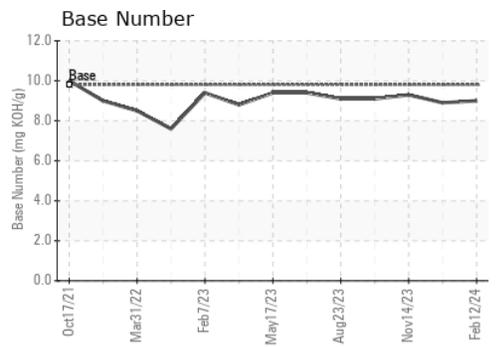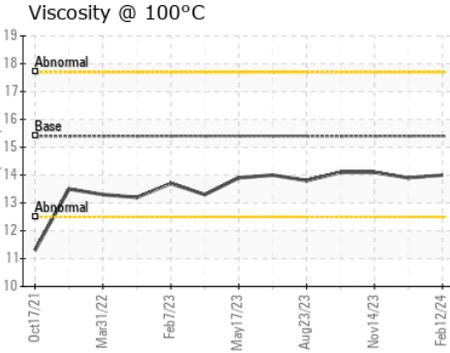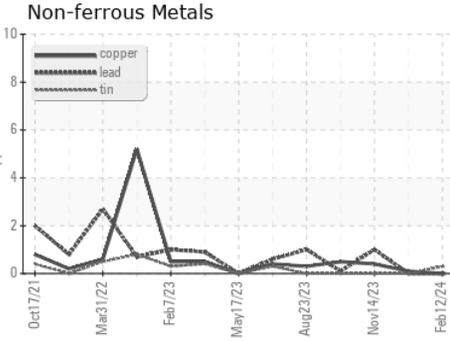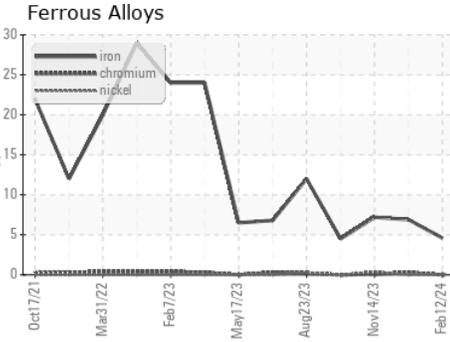

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0099026  
**Lab Number** : 06094900  
**Unique Number** : 10887753  
**Test Package** : FLEET  
**Received** : 20 Feb 2024  
**Tested** : 21 Feb 2024  
**Diagnosed** : 21 Feb 2024 - Wes Davis

**GFL Environmental - 084 - Clarksville**  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042  
 Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com  
 T: (931)552-7276  
 F: (931)572-9674

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)