

OIL ANALYSIS REPORT

mls

Walgreens - Tractor [Walgreens - Tractor] 136A624000 omponen

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.



Machine Age	11115	Olient Into		1405		
Oil Age	mls	Client Info		74405		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINA	TION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR META	LS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	72		
Chromium	ppm	ASTM D5185m	>5	6		
Nickel	ppm	ASTM D5185m	>2	1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>30	61		
Lead	ppm	ASTM D5185m	>30	3		
Copper	ppm	ASTM D5185m	>150	192		
Tin	ppm	ASTM D5185m	>5	6		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	23		
Barium	ppm	ASTM D5185m	0	<1		
Molybdenum	ppm	ASTM D5185m	50	41		
Manganese	ppm	ASTM D5185m	0	5		
Magnesium	ppm	ASTM D5185m	950	596		
Calcium	ppm	ASTM D5185m	1050	1812		
Phosphorus	ppm	ASTM D5185m	995	750		
Zinc	ppm	ASTM D5185m	1180	922		
Sulfur	ppm	ASTM D5185m	2600	1818		
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	10		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	145		
		mothod	limit/booo	ourropt	history1	bioton/2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.2		
Nitration	Abs/cm	*ASTM D7624	>20	12.6		
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.9		
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	27.3		
Base Number (BN)	mg KOH/g	ASTM D2896		5.2		


Sample Number Sample Date Machine Age Oil Age C


Report Id: TSV1373 [WUSCAR] 06100689 (Generated: 02/28/2024 14:01:30) Rev: 1




OIL ANALYSIS REPORT

VISUAL





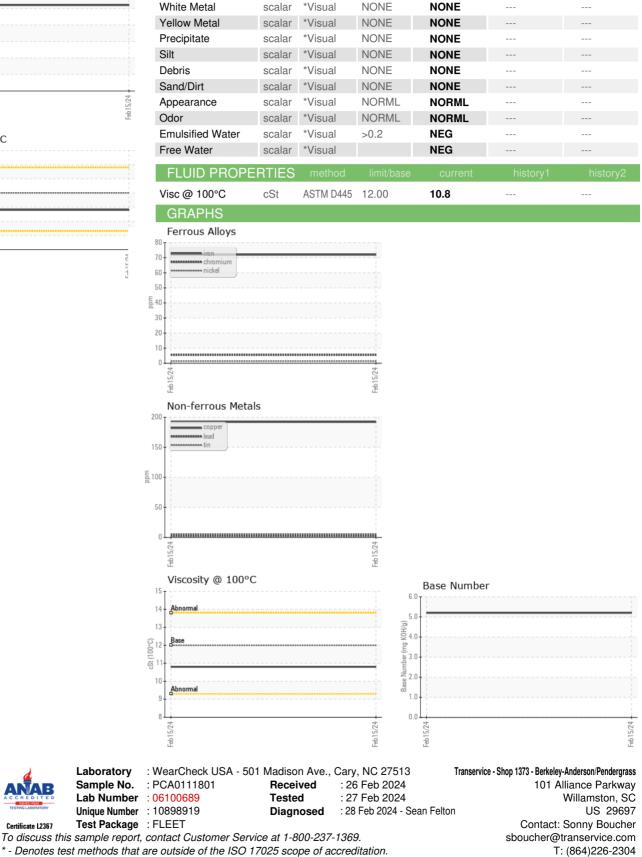

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Page 2 of 2

F: (864)226-2329