




# OIL ANALYSIS REPORT

Sample Rating Trend

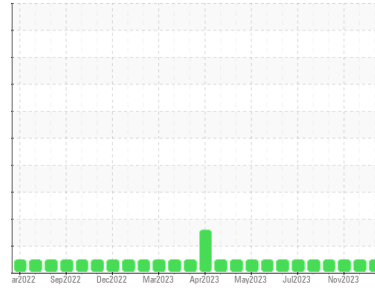

**NORMAL**



Machine Id  
**426120-381**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0110561</b>	GFL0100217	GFL0100175	
Sample Date	Client Info	<b>21 Feb 2024</b>	15 Jan 2024	24 Nov 2023	
Machine Age	mls	Client Info	<b>324643</b>	0	16650
Oil Age	mls	Client Info	<b>0</b>	600	200
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>16</b>	17	6
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>2</b>	2	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	3	2
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	1	<1
Copper	ppm ASTM D5185m >330	<b>11</b>	10	5
Tin	ppm ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	3	2
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	71	57
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	0
Magnesium	ppm ASTM D5185m 1010	<b>951</b>	1174	863
Calcium	ppm ASTM D5185m 1070	<b>1079</b>	1163	995
Phosphorus	ppm ASTM D5185m 1150	<b>992</b>	1164	931
Zinc	ppm ASTM D5185m 1270	<b>1196</b>	1438	1147
Sulfur	ppm ASTM D5185m 2060	<b>3088</b>	3920	4447

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>9</b>	11	4
Sodium	ppm ASTM D5185m	<b>2</b>	<1	<1
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	4	1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.8</b>	0.7	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>10.6</b>	9.6	7.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.8</b>	19.1	18.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.9</b>	16.3	14.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.6</b>	7.6	8.9







# OIL ANALYSIS REPORT

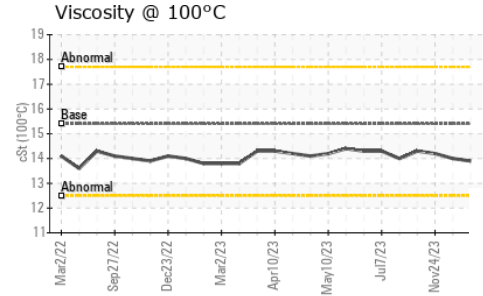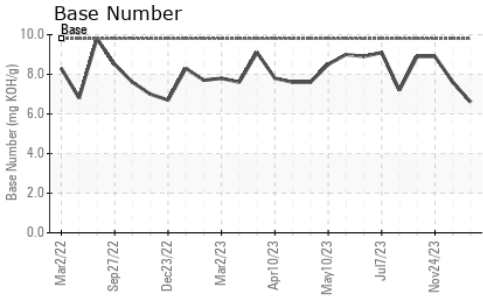

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	14.0	14.2

## GRAPHS

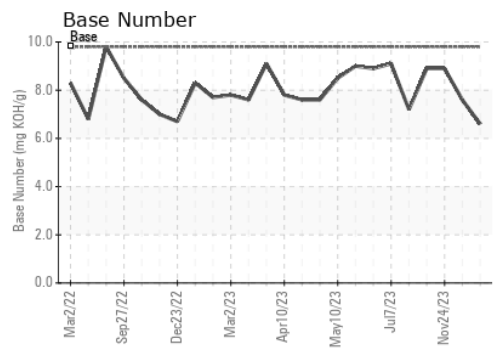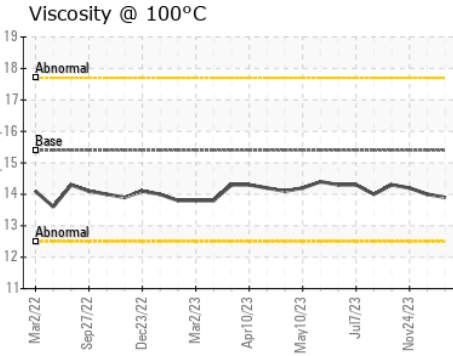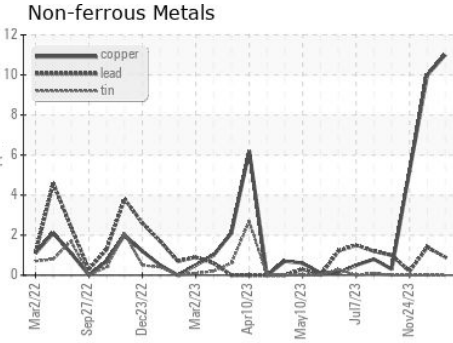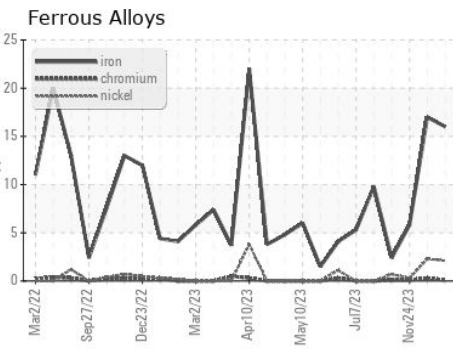

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110561 **Received** : 27 Feb 2024  
**Lab Number** : **06101341** **Tested** : 28 Feb 2024  
**Unique Number** : 10899571 **Diagnosed** : 28 Feb 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 166 - Phenix City**  
 18 Old Brickyard Rd  
 Phenix City, AL  
 US 36869  
 Contact: EDWARD CASHMAN  
 ecashman@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)