


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

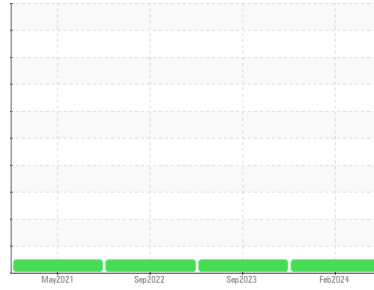

Area
FLEET
Machine Id
VOLVO 2026819
Component
Main Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (38 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0116250	PCA0108073	PCA0081199
Sample Date	Client Info		23 Feb 2024	28 Sep 2023	14 Sep 2022
Machine Age	mls	Client Info	308143	308143	83644
Oil Age	mls	Client Info	83644	224499	83644
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	30	55	28
Chromium	ppm	ASTM D5185m >20	1	<1	<1
Nickel	ppm	ASTM D5185m >2	1	<1	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	5	4
Lead	ppm	ASTM D5185m >40	2	4	2
Copper	ppm	ASTM D5185m >330	11	17	16
Tin	ppm	ASTM D5185m >15	2	2	2
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	2	0	3
Barium	ppm	ASTM D5185m 0	2	0	0
Molybdenum	ppm	ASTM D5185m 50	61	68	64
Manganese	ppm	ASTM D5185m 0	1	1	<1
Magnesium	ppm	ASTM D5185m 950	802	1040	890
Calcium	ppm	ASTM D5185m 1050	966	1215	1188
Phosphorus	ppm	ASTM D5185m 995	850	997	905
Zinc	ppm	ASTM D5185m 1180	1084	1355	1240
Sulfur	ppm	ASTM D5185m 2600	2860	2753	3296

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	16	10	8
Sodium	ppm	ASTM D5185m	<1	4	<1
Potassium	ppm	ASTM D5185m >20	4	7	8



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	0.9	0.8
Nitration	Abs/cm	*ASTM D7624 >20	9.7	11.8	12.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.5	24.8	24.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.2	20.4	19.8
Base Number (BN)	mg KOH/g	ASTM D2896	5.1	4.1	6.2





OIL ANALYSIS REPORT

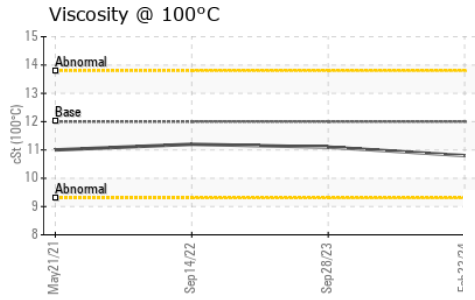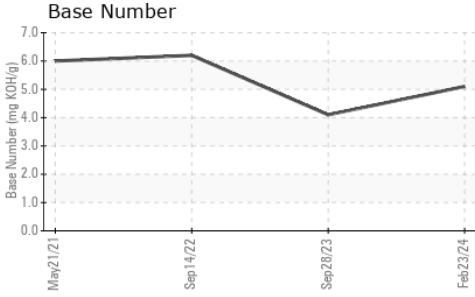

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	11.1

GRAPHS

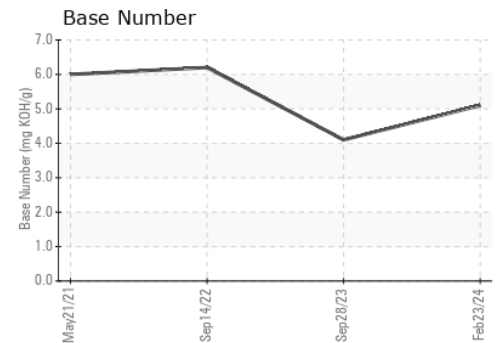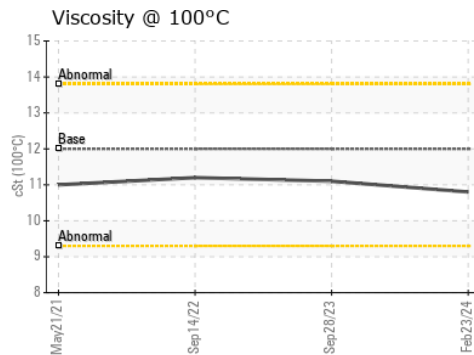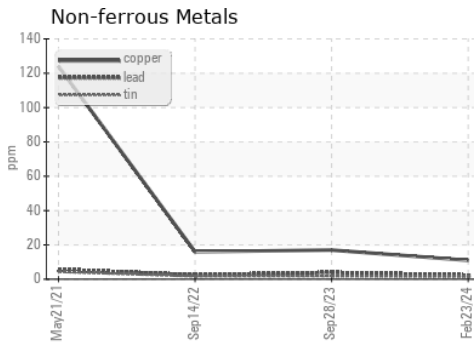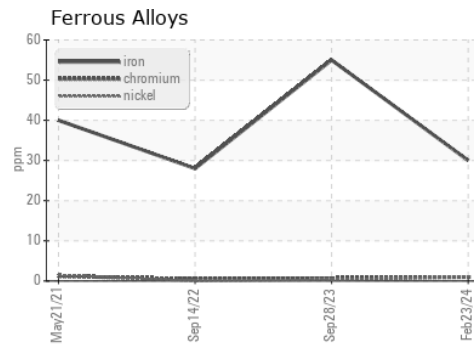

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116250 **Received** : 27 Feb 2024
Lab Number : 06101377 **Tested** : 28 Feb 2024
Unique Number : 10899607 **Diagnosed** : 28 Feb 2024 - Wes Davis
Test Package : FLEET

PERDUE FARMS - DILLON
 2047 HWY 9 WEST
 DILLON, SC
 US 29536
 Contact: KEVIN HOOKS
 kevin.hooks@perdue.com
 T: (843)841-8069
 F: (843)841-8070

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)