




OIL ANALYSIS REPORT

Sample Rating Trend

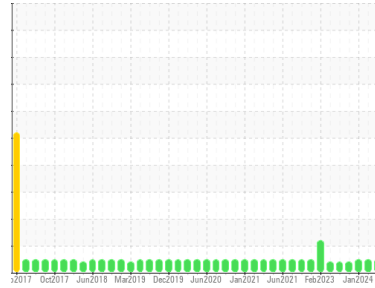

NORMAL



Area
(ECY338)
Machine Id
AUTOCAR 3742
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0109043	GFL0109071	GFL0109093
Sample Date	Client Info		22 Feb 2024	07 Feb 2024	23 Jan 2024
Machine Age	hrs	Client Info	18589	18438	18298
Oil Age	hrs	Client Info	18589	2696	2556
Oil Changed	Client Info		N/A	N/A	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	26	18	12
Chromium	ppm	ASTM D5185m >5	3	2	1
Nickel	ppm	ASTM D5185m >4	<1	0	0
Titanium	ppm	ASTM D5185m >2	<1	<1	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	<1	1
Lead	ppm	ASTM D5185m >150	<1	0	0
Copper	ppm	ASTM D5185m >90	2	<1	<1
Tin	ppm	ASTM D5185m >5	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	13	16	16
Barium	ppm	ASTM D5185m 0	1	0	0
Molybdenum	ppm	ASTM D5185m 60	57	62	60
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	686	779	813
Calcium	ppm	ASTM D5185m 1070	1020	1153	1191
Phosphorus	ppm	ASTM D5185m 1150	892	977	1005
Zinc	ppm	ASTM D5185m 1270	1072	1139	1206
Sulfur	ppm	ASTM D5185m 2060	3066	2942	3150

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	6	4	5
Sodium	ppm	ASTM D5185m	3	4	2
Potassium	ppm	ASTM D5185m >20	2	0	<1

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	0.9	0.7	0.5
Nitration	Abs/cm	*ASTM D7624 >20	7.3	6.6	5.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.9	18.2	17.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	12.7	12.5	11.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.7	7.9	7.9







OIL ANALYSIS REPORT

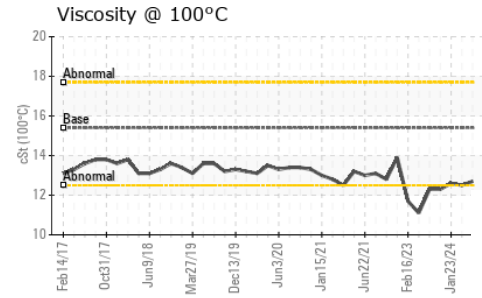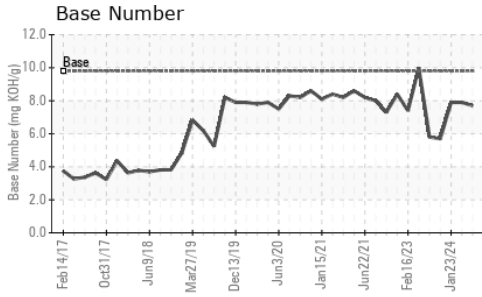

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.7	12.5

GRAPHS

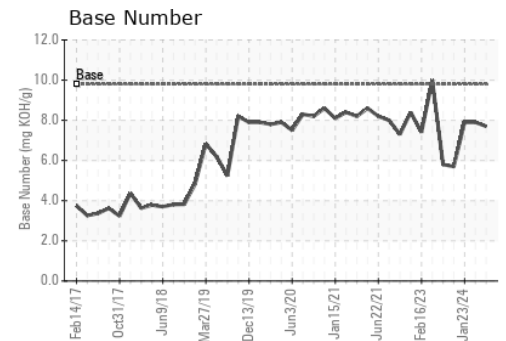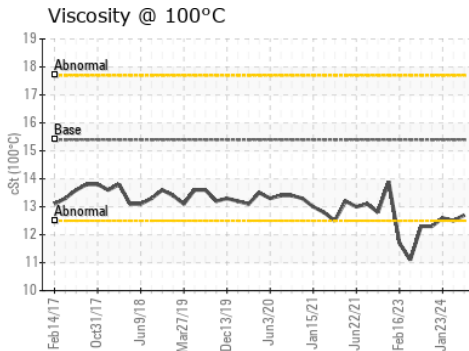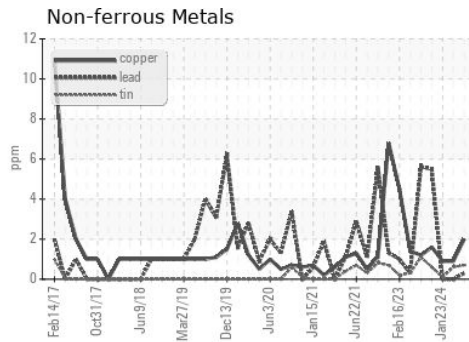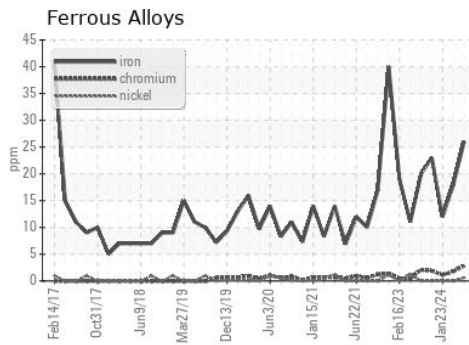

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0109043
 Lab Number : 06101466
 Unique Number : 10899696
 Test Package : FLEET

Received : 27 Feb 2024
 Tested : 28 Feb 2024
 Diagnosed : 28 Feb 2024 - Wes Davis

GFL Environmental - 009 - Fairburn
 6905 Roosevelt Hwy
 Fairburn, GA
 US 30213
 Contact: Eric Jones
 erjones@gflenv.com
 T: (678)630-9927
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)