



Machine Id
JOHN DEERE 5125ML OT-66 (S/N MHLK701075)
 Component
Diesel Engine
 Fluid
PETRO CANADA 15W40 (--- GAL)



DIAGNOSIS

▲ Recommendation
 We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear
 All component wear rates are normal.

▲ Contamination
 Sodium and/or potassium levels are high. Test for glycol is positive.

▲ Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0107114	---	---
Sample Date	Client Info		16 Feb 2024	---	---
Machine Age	hrs	Client Info	5282	---	---
Oil Age	hrs	Client Info	250	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			SEVERE	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<1.0	---	---
Water	WC Method	>0.21	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>51	17	---
Chromium	ppm	ASTM D5185m	>11	1	---
Nickel	ppm	ASTM D5185m	>5	1	---
Titanium	ppm	ASTM D5185m		<1	---
Silver	ppm	ASTM D5185m	>3	0	---
Aluminum	ppm	ASTM D5185m	>31	4	---
Lead	ppm	ASTM D5185m	>26	12	---
Copper	ppm	ASTM D5185m	>26	10	---
Tin	ppm	ASTM D5185m	>4	1	---
Vanadium	ppm	ASTM D5185m		<1	---
Cadmium	ppm	ASTM D5185m		<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		7	---
Barium	ppm	ASTM D5185m		2	---
Molybdenum	ppm	ASTM D5185m		125	---
Manganese	ppm	ASTM D5185m		1	---
Magnesium	ppm	ASTM D5185m		817	---
Calcium	ppm	ASTM D5185m		1072	---
Phosphorus	ppm	ASTM D5185m		863	---
Zinc	ppm	ASTM D5185m		1117	---
Sulfur	ppm	ASTM D5185m		2936	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>22	12	---
Sodium	ppm	ASTM D5185m		▲ 146	---
Potassium	ppm	ASTM D5185m	>20	▲ 505	---
Glycol	%	*ASTM D2982		▲ 0.10	---




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	6.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.2	---









OIL ANALYSIS REPORT

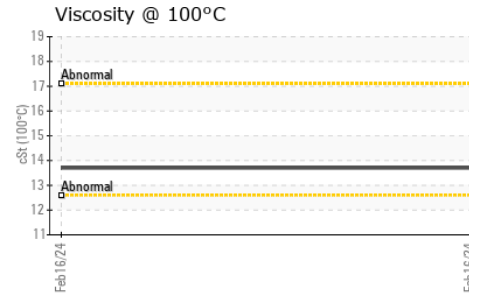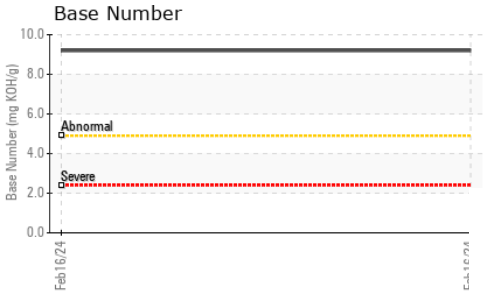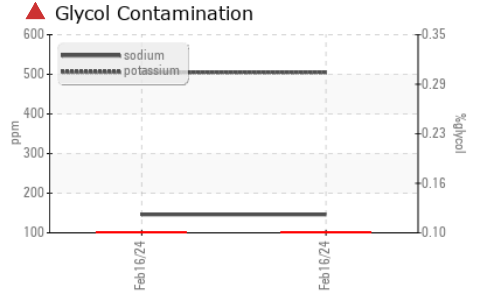

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.7	---	---

GRAPHS

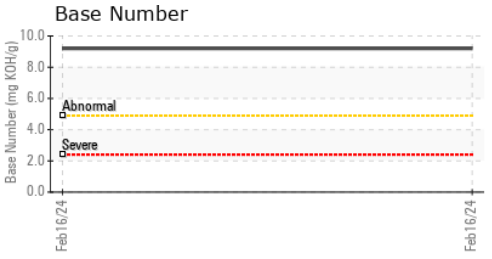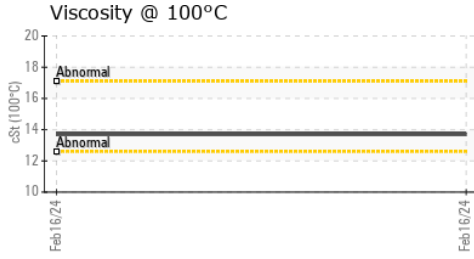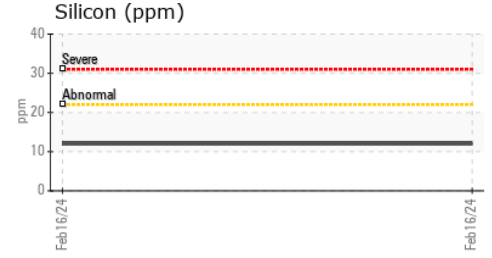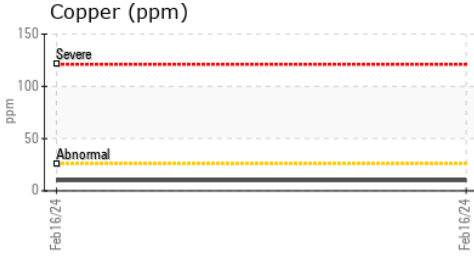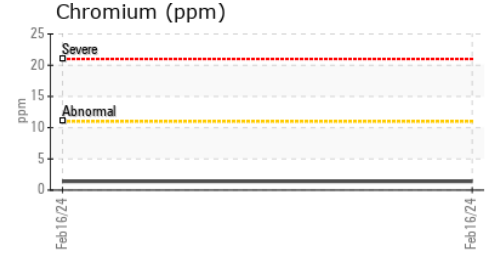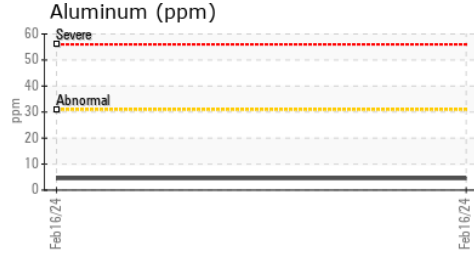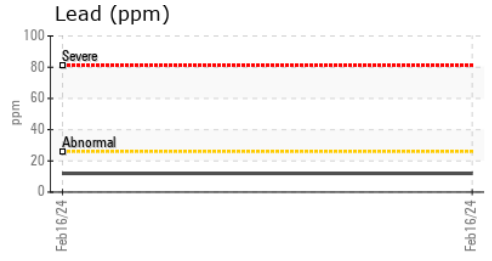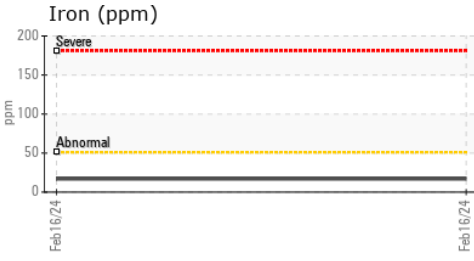

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0107114 **Received** : 28 Feb 2024
Lab Number : 06102751 **Tested** : 01 Mar 2024
Unique Number : 10900981 **Diagnosed** : 01 Mar 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: Glycol, TBN)

TRINITAS FARMING
 45499 W PANOCHE RD
 FIREBAUGH, CA
 US 93622

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: SPENCER COOPER
 spencer.cooper@trinitasfarming.com
 T: (209)493-2999
 F: