


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

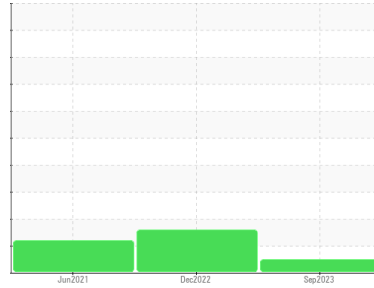

Machine Id
DT699
 Component
Transmission (Auto)
 Fluid
COGNIS EMGARD 2805 ATF (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0074109	PCA0080979	PCA0050657
Sample Date	Client Info			08 Sep 2023	15 Dec 2022	08 Jun 2021
Machine Age	mls	Client Info		157513	125996	0
Oil Age	mls	Client Info		67921	36404	0
Oil Changed	Client Info			Changed	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	89	78	72
Chromium	ppm	ASTM D5185m	>5	0	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	31	22	27
Lead	ppm	ASTM D5185m	>50	17	15	34
Copper	ppm	ASTM D5185m	>225	20	12	8
Tin	ppm	ASTM D5185m	>10	3	2	3
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		68	78	92
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		1	1	<1
Calcium	ppm	ASTM D5185m		86	89	44
Phosphorus	ppm	ASTM D5185m		234	229	260
Zinc	ppm	ASTM D5185m		0	4	3
Sulfur	ppm	ASTM D5185m		1147	1054	244

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6	5	4
Sodium	ppm	ASTM D5185m		4	<1	5
Potassium	ppm	ASTM D5185m	>20	<1	2	3

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	▲ MODER	▲ MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT

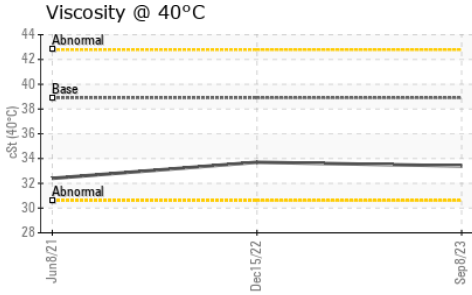




FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	38.9	33.4	33.7	32.4

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

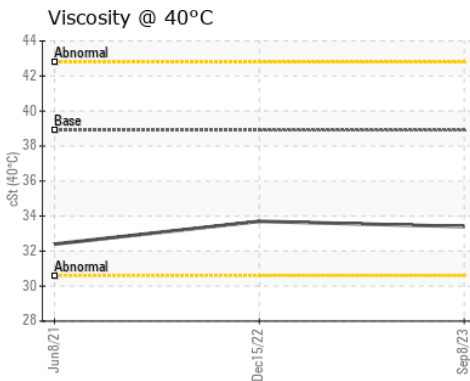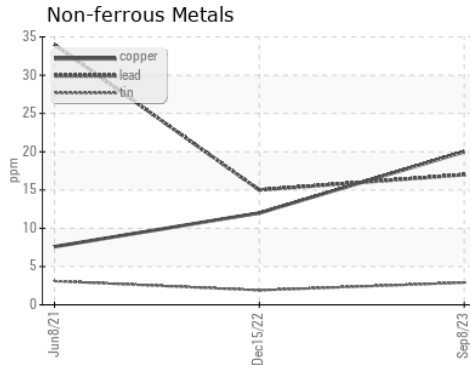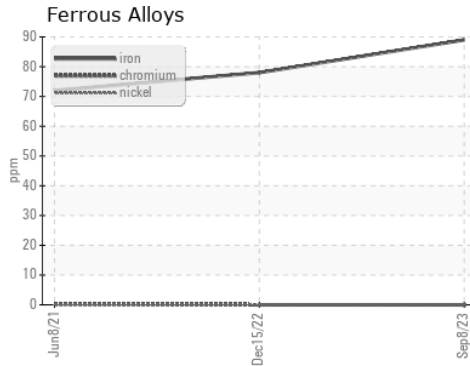

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0074109 **Received** : 29 Feb 2024
Lab Number : 06105657 **Tested** : 02 Mar 2024
Unique Number : 10903887 **Diagnosed** : 04 Mar 2024 - Sean Felton
Test Package : FLEET

NW WHITE & CO - GREER DIVISION
 1060 ROGERS BRIDGE RD
 DUNCAN, SC
 US 29334
 Contact: Matt Quinlan
 mquinlan@nwwhite.com
 T: (864)905-8506
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)