




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

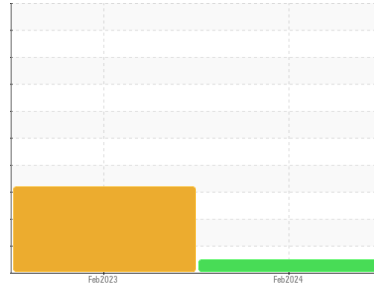

Machine Id  
**426087-402375**

Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0106776</b>	GFL0073696	---
Sample Date	Client Info		<b>28 Feb 2024</b>	27 Feb 2023	---
Machine Age	hrs	Client Info	<b>4624</b>	3011	---
Oil Age	hrs	Client Info	<b>600</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	<b>14</b>	▲ 221	---
Chromium	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m >50	<b>14</b>	▲ 117	---
Lead	ppm	ASTM D5185m >50	<b>&lt;1</b>	5	---
Copper	ppm	ASTM D5185m >225	<b>2</b>	10	---
Tin	ppm	ASTM D5185m >10	<b>3</b>	3	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>72</b>	53	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m	<b>6</b>	6	---
Calcium	ppm	ASTM D5185m	<b>120</b>	133	---
Phosphorus	ppm	ASTM D5185m	<b>206</b>	197	---
Zinc	ppm	ASTM D5185m	<b>9</b>	13	---
Sulfur	ppm	ASTM D5185m	<b>1426</b>	1470	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>6</b>	▲ 48	---
Sodium	ppm	ASTM D5185m	<b>6</b>	5	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual	<b>NEG</b>	NEG	---



# OIL ANALYSIS REPORT

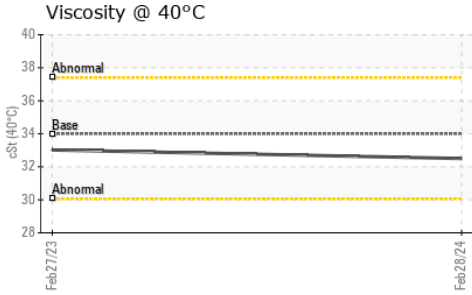




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 34	<b>32.5</b>	33.02	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

### GRAPHS

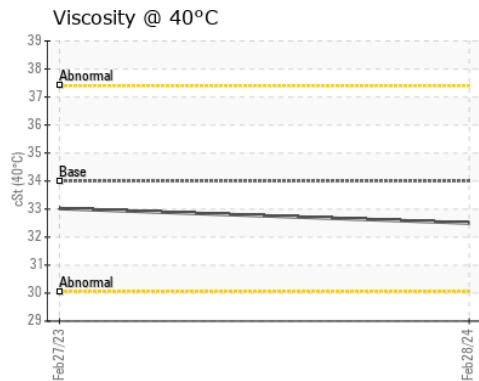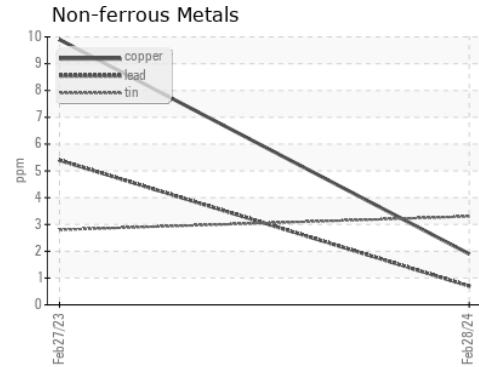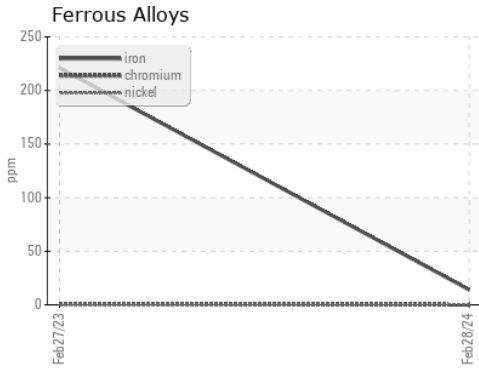

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0106776  
**Lab Number** : 06106502  
**Unique Number** : 10909999  
**Test Package** : FLEET

**Received** : 01 Mar 2024  
**Tested** : 04 Mar 2024  
**Diagnosed** : 04 Mar 2024 - Wes Davis

**GFL Environmental - 856 - Houston South**  
 8515 Highway 6 South  
 Houston, TX  
 US 77083  
 Contact: Apolinar Zacarias  
 pzacariascano@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: