


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

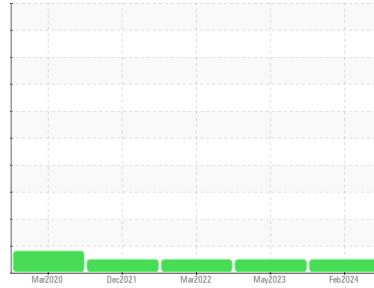

Area  
**FLEET**  
Machine Id  
**INTERNATIONAL 2026766**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0118719</b>	PCA0095974	PCA0067459
Sample Date	Client Info		<b>26 Feb 2024</b>	11 May 2023	26 Mar 2022
Machine Age	mls	Client Info	<b>330740</b>	285792	285688
Oil Age	mls	Client Info	<b>44948</b>	29002	13784
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>75</b>	80	35
Chromium	ppm	ASTM D5185m >20	<b>4</b>	5	3
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	8	4
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	3	<1
Copper	ppm	ASTM D5185m >330	<b>15</b>	18	12
Tin	ppm	ASTM D5185m >15	<b>0</b>	1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>&lt;1</b>	0	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>68</b>	70	64
Manganese	ppm	ASTM D5185m 0	<b>2</b>	2	1
Magnesium	ppm	ASTM D5185m 950	<b>1183</b>	1067	1050
Calcium	ppm	ASTM D5185m 1050	<b>1309</b>	1269	1143
Phosphorus	ppm	ASTM D5185m 995	<b>1094</b>	1012	1132
Zinc	ppm	ASTM D5185m 1180	<b>1450</b>	1347	1376
Sulfur	ppm	ASTM D5185m 2600	<b>3464</b>	3061	2702

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>15</b>	12	7
Sodium	ppm	ASTM D5185m	<b>7</b>	7	2
Potassium	ppm	ASTM D5185m >20	<b>12</b>	7	4



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	1.2	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.9</b>	13.1	10.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.3</b>	25.9	21.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.7</b>	22.0	18.3
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.5</b>	6.1	8.9





# OIL ANALYSIS REPORT

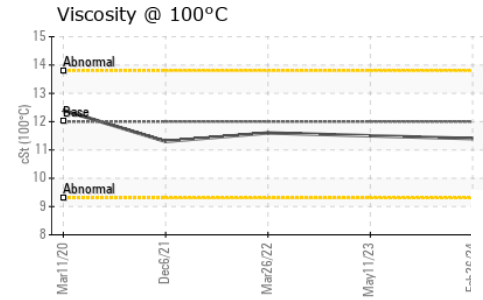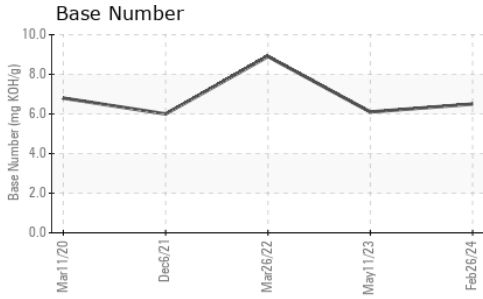

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.4</b>	11.5	11.6

## GRAPHS

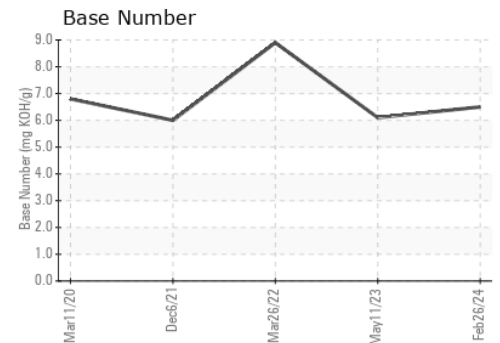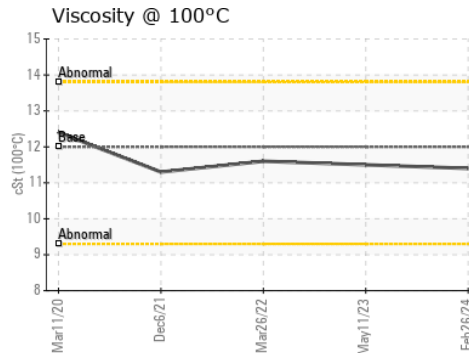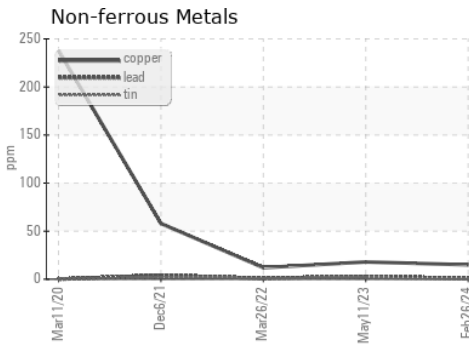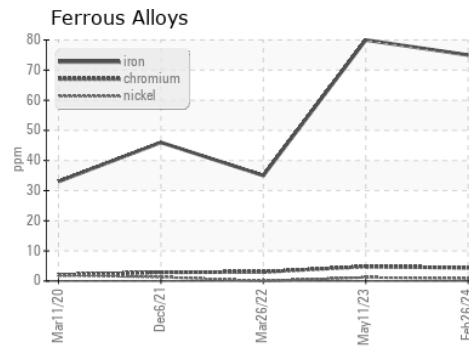

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0118719      **Received** : 04 Mar 2024  
**Lab Number** : **06107035**      **Tested** : 04 Mar 2024  
**Unique Number** : 10910532      **Diagnosed** : 04 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - ACCOMAC**  
 22520 LANKFORD HWY  
 ACCOMAC, VA  
 US 23301  
 Contact: PEGGY KIMES  
 peggy.kimes@perdue.com  
 T: (757)787-5304  
 F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)