


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

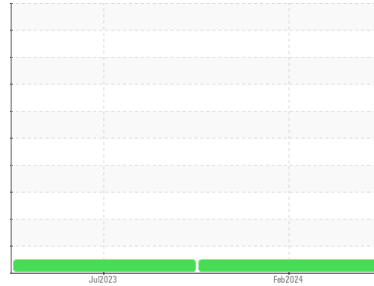

Area  
**(94688X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A62047**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0117908</b>	PCA0093795	---
Sample Date	Client Info		<b>12 Feb 2024</b>	24 Jul 2023	---
Machine Age	mls	Client Info	<b>448139</b>	407395	---
Oil Age	mls	Client Info	<b>49000</b>	48000	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>21</b>	9	---
Chromium	ppm	ASTM D5185m >5	<b>2</b>	1	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >30	<b>12</b>	5	---
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >150	<b>7</b>	4	---
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	<1	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	58	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 950	<b>982</b>	926	---
Calcium	ppm	ASTM D5185m 1050	<b>1099</b>	1049	---
Phosphorus	ppm	ASTM D5185m 995	<b>981</b>	959	---
Zinc	ppm	ASTM D5185m 1180	<b>1215</b>	1220	---
Sulfur	ppm	ASTM D5185m 2600	<b>2311</b>	3182	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	4	---
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	---
Potassium	ppm	ASTM D5185m >20	<b>9</b>	3	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.8</b>	8.4	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.4</b>	19.4	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.3</b>	15.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.3</b>	7.4	---





# OIL ANALYSIS REPORT

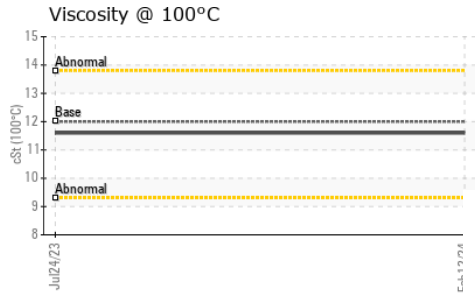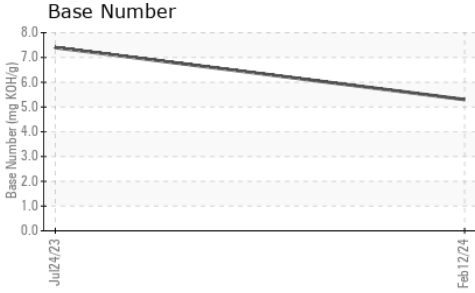

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.6</b>	11.6	---

## GRAPHS

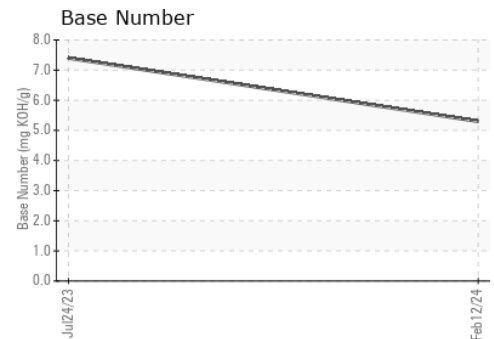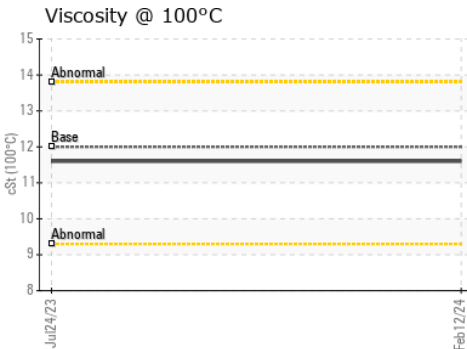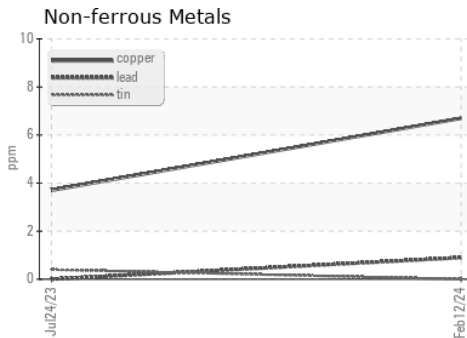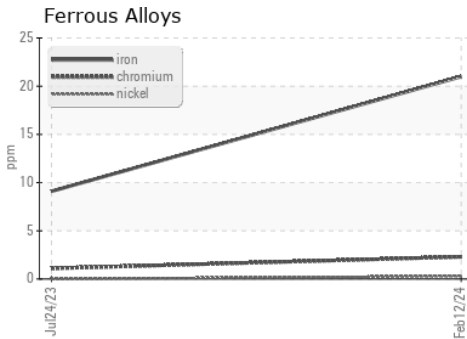

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117908  
**Lab Number** : **06112448**  
**Unique Number** : 10915945  
**Test Package** : FLEET

**Received** : 08 Mar 2024  
**Tested** : 08 Mar 2024  
**Diagnosed** : 08 Mar 2024 - Wes Davis

**Transervice - Shop 1366 - Berkeley-Woodland**  
 2370 East Main Street  
 Woodland, CA  
 US 95776  
 Contact: Gary Mann  
 gmann@transervice.com  
 T: (530)666-7771  
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)