

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**2227080**  
 Component  
**1 Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- QTS)**



## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 Metal levels are typical for a new component breaking in.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0117940</b>	---	---
Sample Date	Client Info		<b>05 Feb 2024</b>	---	---
Machine Age	mls	Client Info	<b>19494</b>	---	---
Oil Age	mls	Client Info	<b>19494</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>133</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	---	---
Lead	ppm	ASTM D5185m >25	<b>12</b>	---	---
Copper	ppm	ASTM D5185m >100	<b>15</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>22</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	<b>140</b>	---	---
Barium	ppm	ASTM D5185m 200	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 12	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>11</b>	---	---
Magnesium	ppm	ASTM D5185m 12	<b>0</b>	---	---
Calcium	ppm	ASTM D5185m 150	<b>2</b>	---	---
Phosphorus	ppm	ASTM D5185m 1650	<b>1086</b>	---	---
Zinc	ppm	ASTM D5185m 125	<b>0</b>	---	---
Sulfur	ppm	ASTM D5185m 22500	<b>27803</b>	---	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>50</b>	---	---
Sodium	ppm	ASTM D5185m	<b>6</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---



# OIL ANALYSIS REPORT

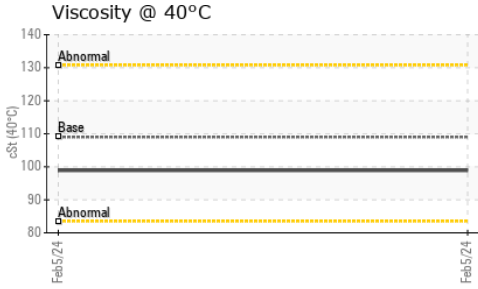




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	109	98.9	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

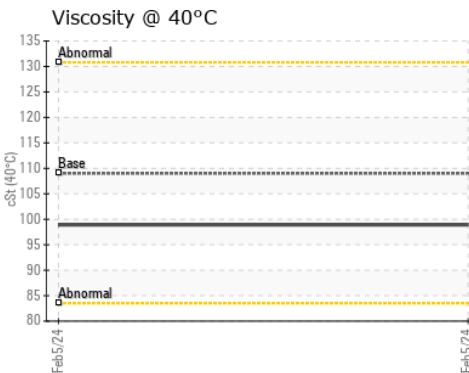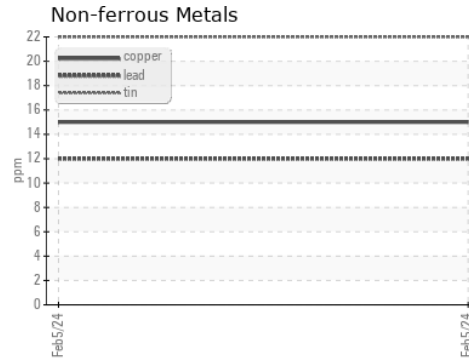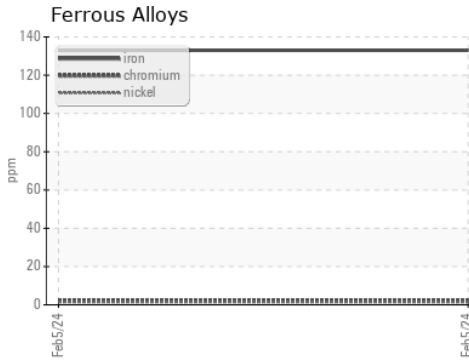

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117940 **Received** : 14 Mar 2024  
**Lab Number** : 06118647 **Tested** : 15 Mar 2024  
**Unique Number** : 10927480 **Diagnosed** : 18 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: