


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Area
(65637Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A624106
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

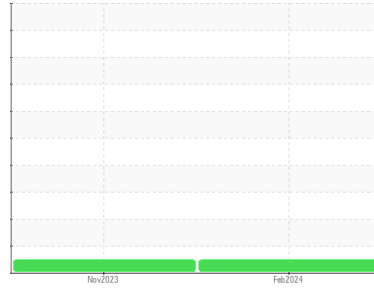

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 Metal levels are typical for a new component breaking in.

Contamination
 Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0103651	PCA0103679	---
Sample Date	Client Info		14 Feb 2024	27 Nov 2023	---
Machine Age	mls	Client Info	54752	31426	---
Oil Age	mls	Client Info	23008	31426	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	29	25	---
Chromium	ppm	ASTM D5185m >5	2	<1	---
Nickel	ppm	ASTM D5185m >2	<1	0	---
Titanium	ppm	ASTM D5185m	<1	0	---
Silver	ppm	ASTM D5185m >3	0	0	---
Aluminum	ppm	ASTM D5185m >30	19	2	---
Lead	ppm	ASTM D5185m >30	<1	5	---
Copper	ppm	ASTM D5185m >150	277	3	---
Tin	ppm	ASTM D5185m >5	2	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	10	241	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 50	54	86	---
Manganese	ppm	ASTM D5185m 0	1	<1	---
Magnesium	ppm	ASTM D5185m 950	796	416	---
Calcium	ppm	ASTM D5185m 1050	1327	1529	---
Phosphorus	ppm	ASTM D5185m 995	966	1042	---
Zinc	ppm	ASTM D5185m 1180	1168	1293	---
Sulfur	ppm	ASTM D5185m 2600	2860	3044	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	6	4	---
Sodium	ppm	ASTM D5185m	2	3	---
Potassium	ppm	ASTM D5185m >20	43	0	---



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.6	---
Nitration	Abs/cm	*ASTM D7624 >20	8.6	9.1	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.6	22.7	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.4	22.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	7.4	8.1	---





OIL ANALYSIS REPORT

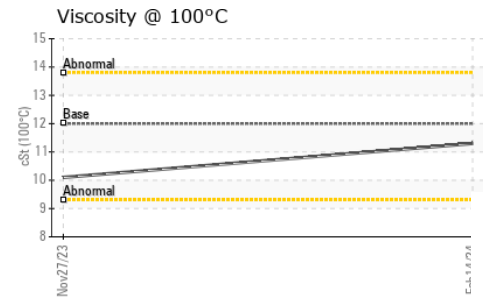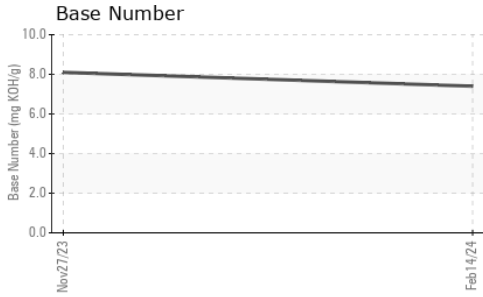

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	10.1

GRAPHS

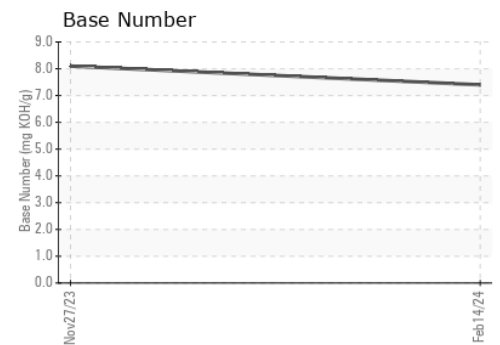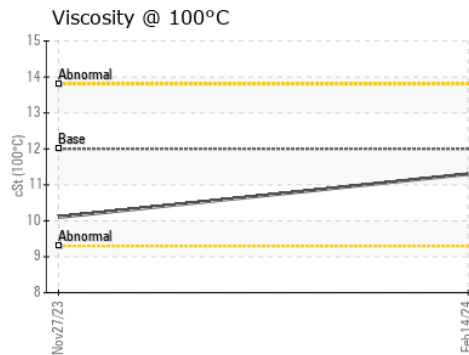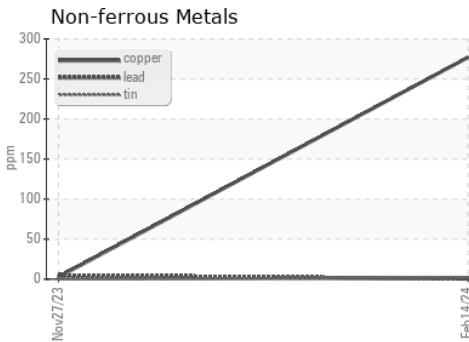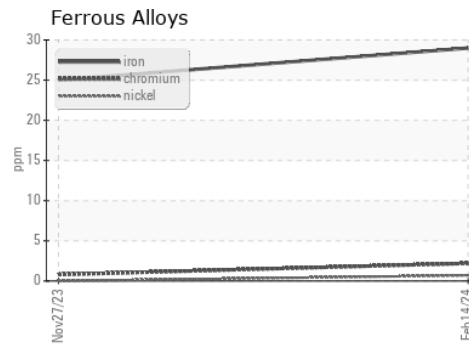

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0103651
Lab Number : **06121388**
Unique Number : 10930221
Test Package : FLEET

Received : 18 Mar 2024
Tested : 19 Mar 2024
Diagnosed : 19 Mar 2024 - Wes Davis

Transervice - Shop 1365 - Berkeley-Nazareth
 6813 Chrisphalt Drive
 Bath Borough, PA
 US 18014
 Contact: Stephen Mackes
 smackes@transervice.com
 T: (610)837-8103
 F: (610)837-8105

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)