




# OIL ANALYSIS REPORT

Sample Rating Trend

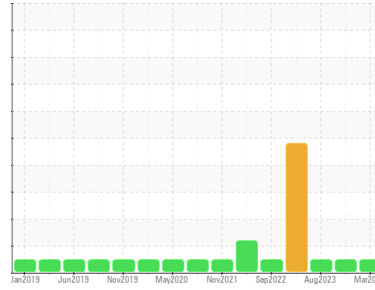

**NORMAL**



Machine Id  
**725050-361606**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Oil sample )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0114475</b>	GFL0093303	GFL0083441
Sample Date	Client Info	<b>13 Mar 2024</b>	16 Oct 2023	19 Aug 2023
Machine Age	mls Client Info	<b>231018</b>	224099	18559
Oil Age	mls Client Info	<b>0</b>	224099	18559
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>23</b>	7	18
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>2</b>	2	5
Lead	ppm ASTM D5185m >45	<b>&lt;1</b>	<1	<1
Copper	ppm ASTM D5185m >85	<b>7</b>	10	27
Tin	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>1</b>	4	3
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	53	64
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>1003</b>	887	976
Calcium	ppm ASTM D5185m 1070	<b>1150</b>	1081	1387
Phosphorus	ppm ASTM D5185m 1150	<b>1023</b>	882	1162
Zinc	ppm ASTM D5185m 1270	<b>1265</b>	1169	1406
Sulfur	ppm ASTM D5185m 2060	<b>3662</b>	2763	3982

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>13</b>	10	22
Sodium	ppm ASTM D5185m	<b>13</b>	12	26
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	3	<1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.4</b>	0.6	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>10.0</b>	8.0	9.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.9</b>	19.4	21.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.6</b>	14.8	16.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.9</b>	8.3	8.3







# OIL ANALYSIS REPORT

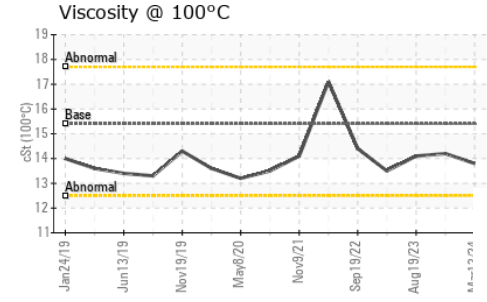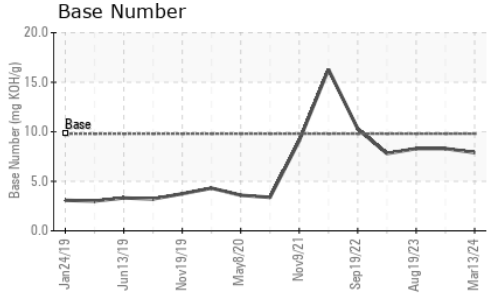

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	14.2	14.1

## GRAPHS

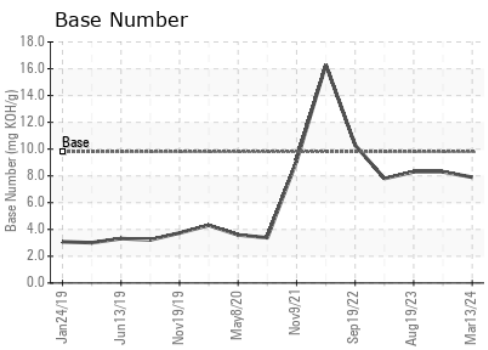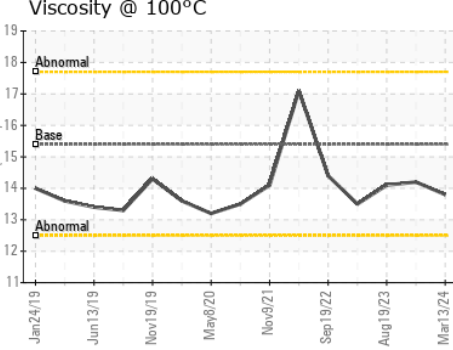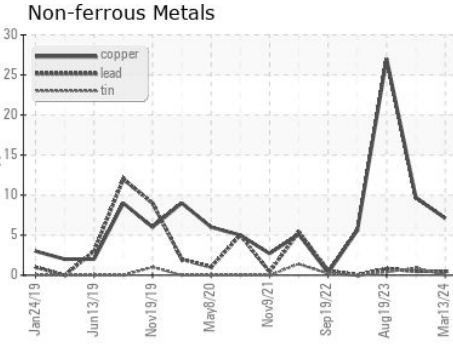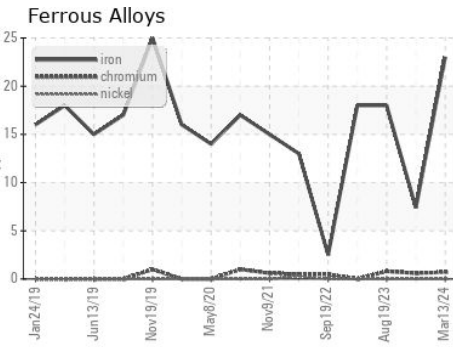

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0114475 **Received** : 19 Mar 2024  
**Lab Number** : **06123007** **Tested** : 20 Mar 2024  
**Unique Number** : 10937158 **Diagnosed** : 21 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Saul Castillo  
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: