




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

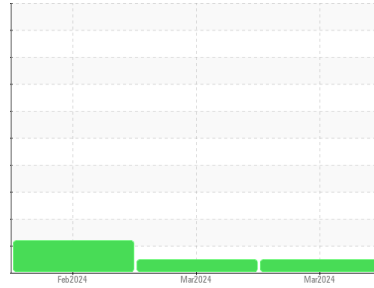

Machine Id
434025

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Engine oil sample)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0114452	GFL0114450	GFL0114466
Sample Date	Client Info	11 Mar 2024	05 Mar 2024	23 Feb 2024
Machine Age	hrs	720	684	598
Oil Age	hrs	720	0	598
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		NORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	10	8	40
Chromium	ppm ASTM D5185m >4	<1	<1	<1
Nickel	ppm ASTM D5185m >2	<1	0	<1
Titanium	ppm ASTM D5185m	<1	0	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >9	7	4	24
Lead	ppm ASTM D5185m >30	<1	<1	<1
Copper	ppm ASTM D5185m >35	3	2	17
Tin	ppm ASTM D5185m >4	<1	0	1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	26	28	18
Barium	ppm ASTM D5185m 5	2	0	3
Molybdenum	ppm ASTM D5185m 50	55	48	53
Manganese	ppm ASTM D5185m 0	1	1	11
Magnesium	ppm ASTM D5185m 560	595	615	834
Calcium	ppm ASTM D5185m 1510	1513	1534	1426
Phosphorus	ppm ASTM D5185m 780	699	822	796
Zinc	ppm ASTM D5185m 870	953	976	1050
Sulfur	ppm ASTM D5185m 2040	2455	2986	2680

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	6	4	26
Sodium	ppm ASTM D5185m	3	4	5
Potassium	ppm ASTM D5185m >20	24	15	▲ 98

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0.1	0	0
Nitration	Abs/cm *ASTM D7624 >20	7.7	7.1	11.7
Sulfation	Abs/.1mm *ASTM D7415 >30	19.0	18.9	22.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	16.4	16.1	20.8
Base Number (BN)	mg KOH/g ASTM D2896 10.2	7.9	8.2	3.8







OIL ANALYSIS REPORT

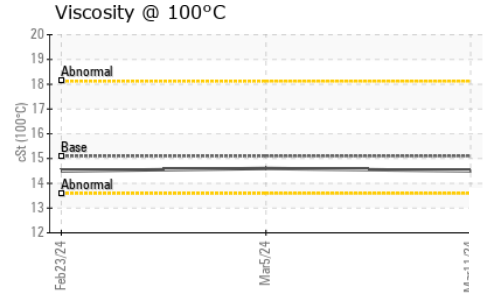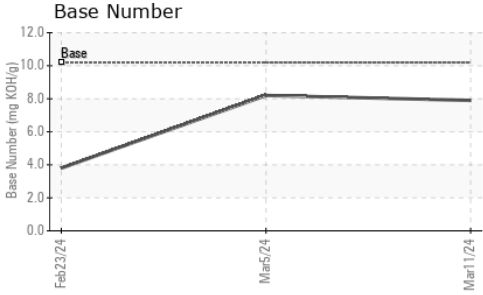

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	14.5	14.6	14.5

GRAPHS

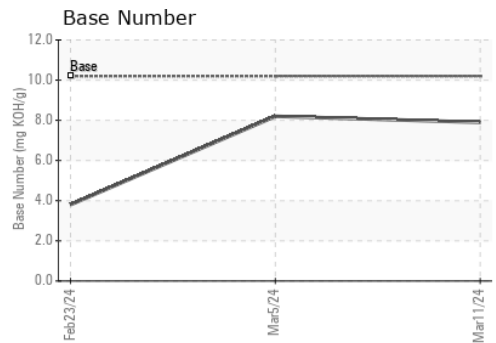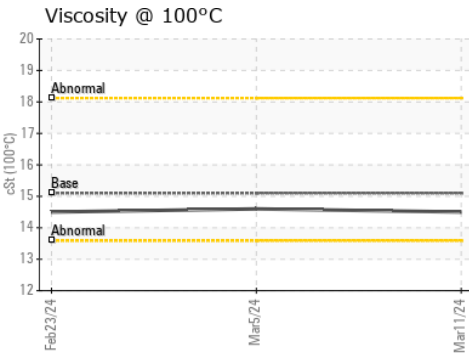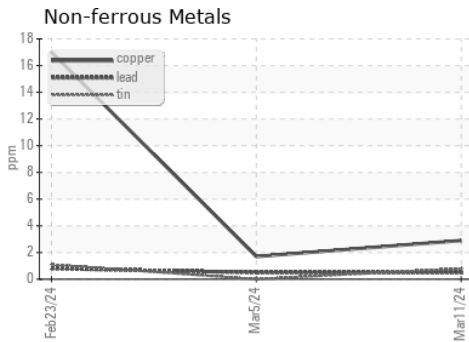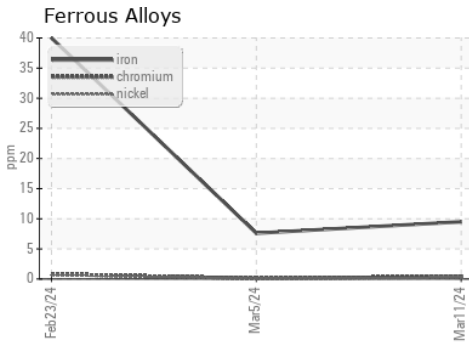

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0114452
Lab Number : **06125404**
Unique Number : 10939555
Test Package : FLEET

Received : 21 Mar 2024
Tested : 22 Mar 2024
Diagnosed : 25 Mar 2024 - Don Baldrige

GFL Environmental - 865 - East Mount Hauling
 7213 East Mount Houston Road
 Houston, TX
 US 77050
 Contact: Saul Castillo
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: