




# OIL ANALYSIS REPORT

Sample Rating Trend

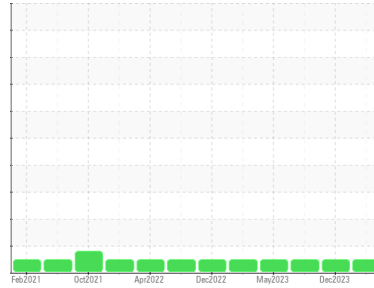

**NORMAL**



Machine Id  
**649M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0116950</b>	GFL0096606	GFL0091507
Sample Date	Client Info	<b>21 Mar 2024</b>	19 Dec 2023	12 Sep 2023
Machine Age	hrs	<b>8989</b>	9952	8989
Oil Age	hrs	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>21</b>	21	16
Chromium	ppm ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm ASTM D5185m >5	<b>0</b>	6	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	<1	2
Lead	ppm ASTM D5185m >40	<b>0</b>	0	1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	4	2
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	2	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	61	60
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>971</b>	921	1044
Calcium	ppm ASTM D5185m 1070	<b>1073</b>	1105	1196
Phosphorus	ppm ASTM D5185m 1150	<b>1032</b>	1018	998
Zinc	ppm ASTM D5185m 1270	<b>1304</b>	1246	1330
Sulfur	ppm ASTM D5185m 2060	<b>3455</b>	2602	3171

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	4	5
Sodium	ppm ASTM D5185m	<b>3</b>	6	6
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	1	1

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.7</b>	1.3	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>9.6</b>	9.6	8.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.8</b>	21.4	20.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.7</b>	16.2	16.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.0</b>	7.0	6.8







# OIL ANALYSIS REPORT

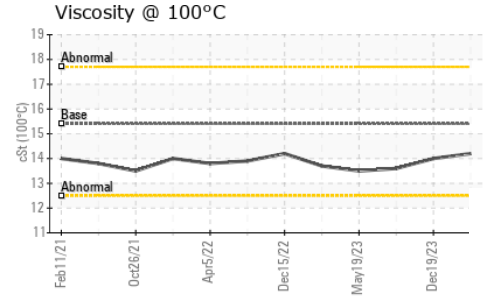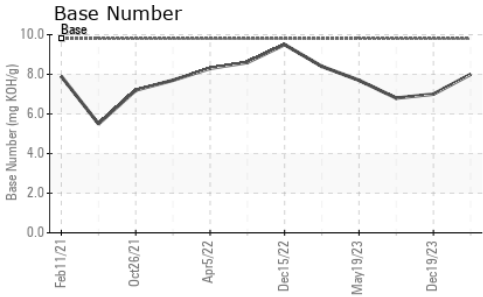

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.0	13.6

## GRAPHS

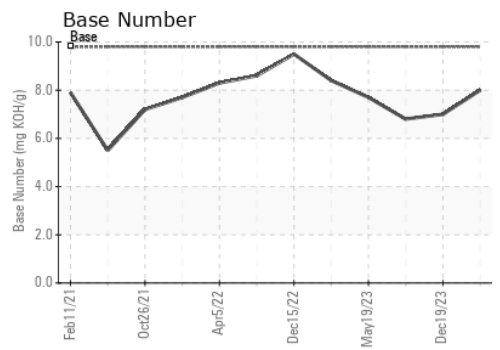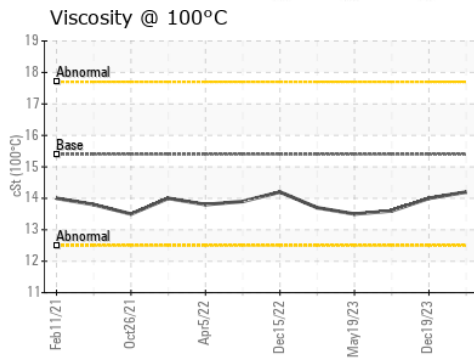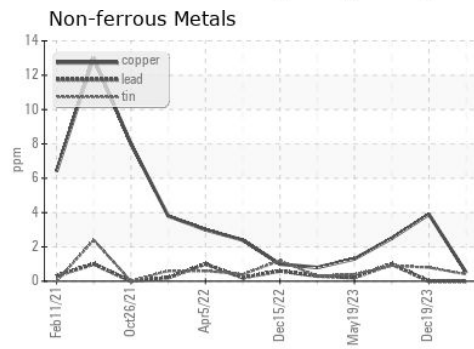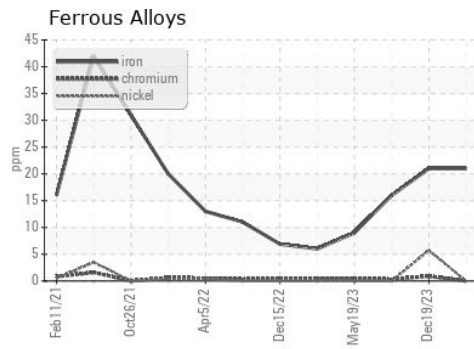

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116950      **Received** : 22 Mar 2024  
**Lab Number** : **06126313**      **Tested** : 25 Mar 2024  
**Unique Number** : 10940464      **Diagnosed** : 25 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 465 - Pontiac**  
 888 Baldwin  
 Pontiac, MI  
 US 48340  
 Contact: Ricky Matthews  
 rickymathews@gflenv.com  
 T: (586)825-9514  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)