




# OIL ANALYSIS REPORT

Sample Rating Trend

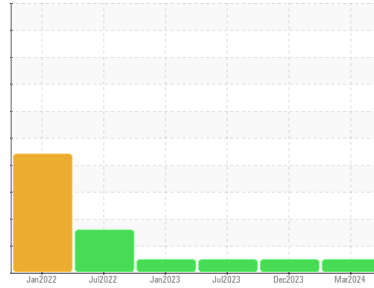

**NORMAL**



Machine Id  
**726027**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0116954</b>	GFL0096561	GFL0081261
Sample Date	Client Info		<b>21 Mar 2024</b>	04 Dec 2023	03 Jul 2023
Machine Age	hrs	Client Info	<b>9690</b>	9362	8796
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>20</b>	28	17
Chromium	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	5	8
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	<1	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	61	68
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>920</b>	1011	1064
Calcium	ppm	ASTM D5185m 1070	<b>1033</b>	1137	1196
Phosphorus	ppm	ASTM D5185m 1150	<b>988</b>	923	1183
Zinc	ppm	ASTM D5185m 1270	<b>1235</b>	1324	1429
Sulfur	ppm	ASTM D5185m 2060	<b>3266</b>	3166	4043

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	8	4
Sodium	ppm	ASTM D5185m	<b>3</b>	5	2
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	6	4

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.2	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.6</b>	10.3	9.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.9</b>	21.9	21.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.7</b>	20.1	17.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.0</b>	6.8	7.8







# OIL ANALYSIS REPORT

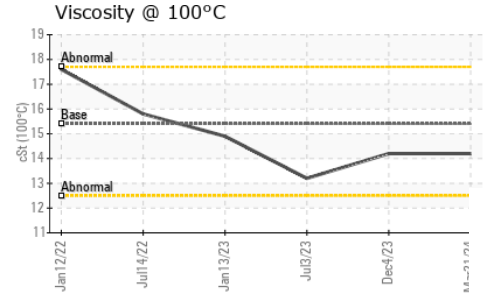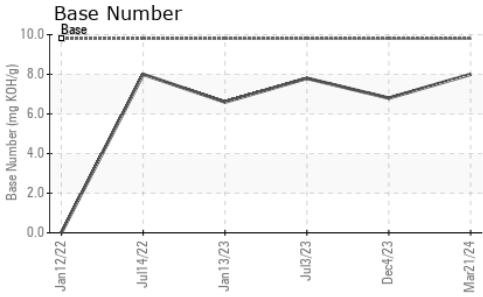

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.2	13.2

## GRAPHS

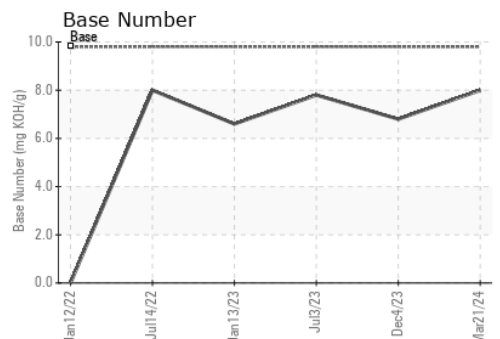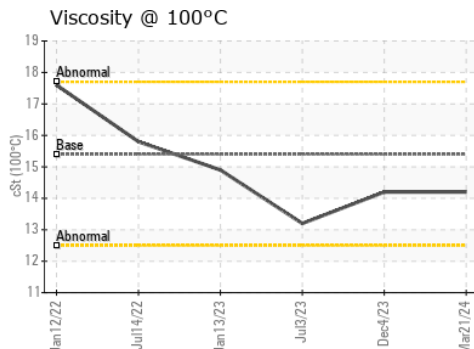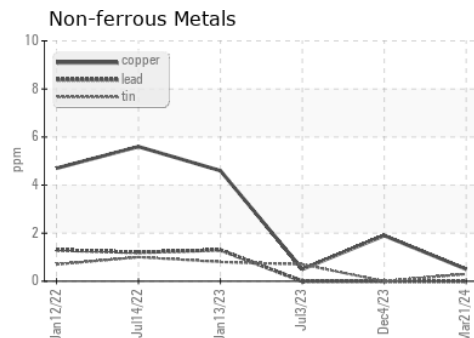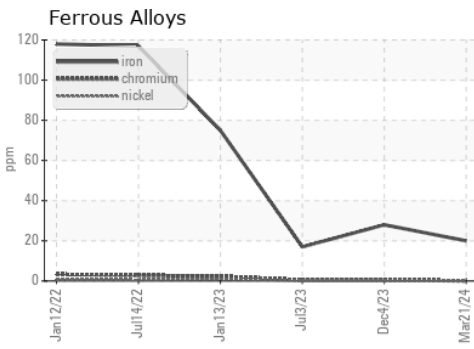

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116954  
**Lab Number** : **06126326**  
**Unique Number** : 10940477  
**Test Package** : FLEET  
**Received** : 22 Mar 2024  
**Tested** : 25 Mar 2024  
**Diagnosed** : 25 Mar 2024 - Wes Davis

**GFL Environmental - 465 - Pontiac**  
 888 Baldwin  
 Pontiac, MI  
 US 48340  
 Contact: Ricky Matthews  
 rickymathews@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)