


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

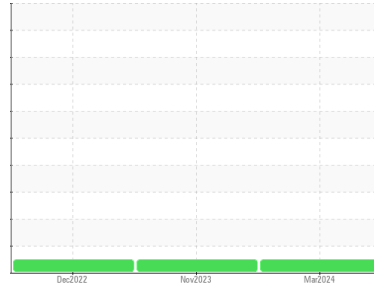

Machine Id  
**ENG043**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Serviced )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0085601</b>	PCA0085647	PCA0070448
Sample Date	Client Info		<b>08 Mar 2024</b>	14 Nov 2023	14 Dec 2022
Machine Age	hrs	Client Info	<b>24063</b>	23335	22645
Oil Age	hrs	Client Info	<b>24063</b>	690	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>14</b>	18	17
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	2
Lead	ppm	ASTM D5185m >40	<b>3</b>	2	2
Copper	ppm	ASTM D5185m >330	<b>7</b>	12	39
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	3	35
Barium	ppm	ASTM D5185m 0	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	59	62
Manganese	ppm	ASTM D5185m 0	<b>1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>928</b>	924	830
Calcium	ppm	ASTM D5185m 1070	<b>1097</b>	1102	1105
Phosphorus	ppm	ASTM D5185m 1150	<b>999</b>	1059	976
Zinc	ppm	ASTM D5185m 1270	<b>1216</b>	1262	1179
Sulfur	ppm	ASTM D5185m 2060	<b>3070</b>	3051	2982

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	5	3
Sodium	ppm	ASTM D5185m	<b>47</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>3</b>	0	<1



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.2</b>	7.5	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.8</b>	19.2	19.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.5</b>	14.3	15.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	8.4	8.5









# OIL ANALYSIS REPORT

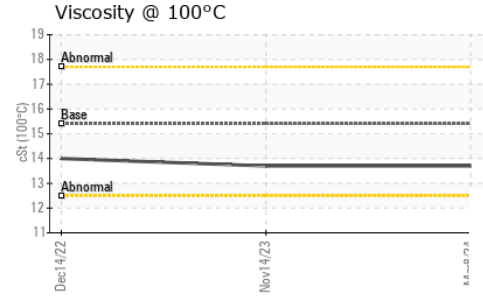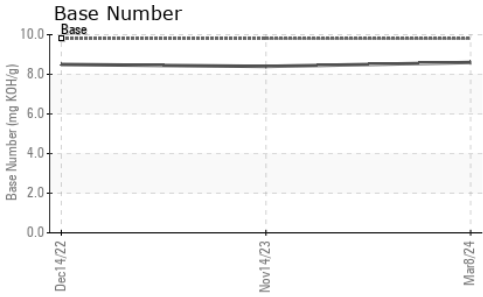

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.7	14.0

## GRAPHS

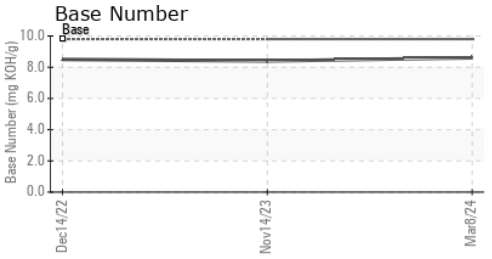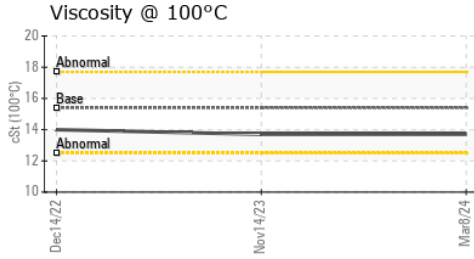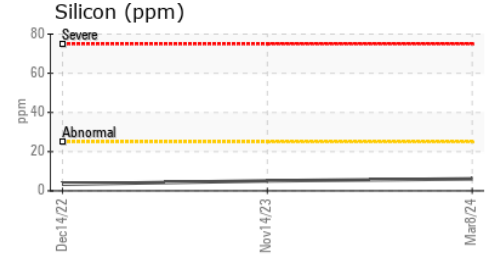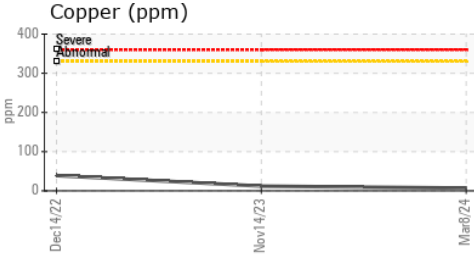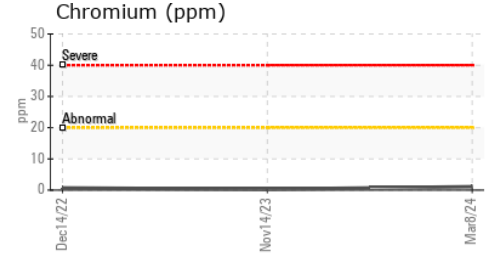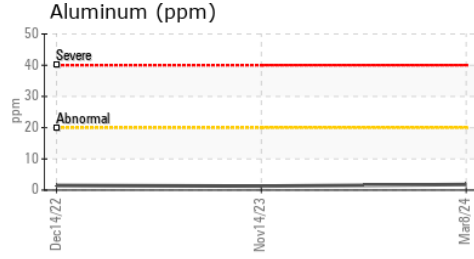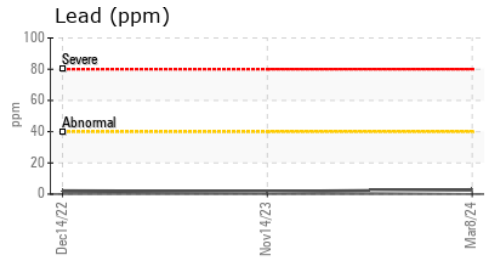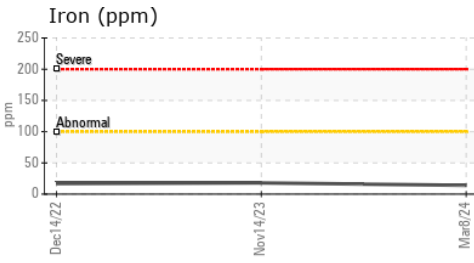

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0085601      **Received** : 25 Mar 2024  
**Lab Number** : **06127471**      **Tested** : 26 Mar 2024  
**Unique Number** : 10941622      **Diagnosed** : 27 Mar 2024 - Jonathan Hester  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Kemp Quarries - Muskogee Sand**  
 3395 W 50th St N  
 Porter, OK  
 US 74454  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

muskogee@muskogeessand.com

T:  
F: