


OIL ANALYSIS REPORT

Sample Rating Trend

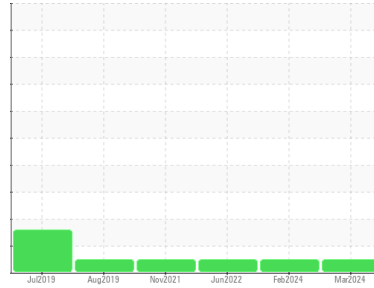

Machine Id
TEREX D16
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (8 GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0118457	PCA0118525	PCA0016904
Sample Date	Client Info		18 Mar 2024	16 Feb 2024	01 Jun 2022
Machine Age	hrs	Client Info	7019	6735	4169
Oil Age	hrs	Client Info	0	515	250
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	32	43	42
Chromium	ppm	ASTM D5185m >20	<1	1	2
Nickel	ppm	ASTM D5185m >4	<1	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	3	2
Lead	ppm	ASTM D5185m >40	2	3	3
Copper	ppm	ASTM D5185m >330	5	14	4
Tin	ppm	ASTM D5185m >15	2	3	6
Antimony	ppm	ASTM D5185m	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	5	4
Barium	ppm	ASTM D5185m	0	3	0
Molybdenum	ppm	ASTM D5185m	62	61	63
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m	981	900	1023
Calcium	ppm	ASTM D5185m	1052	1062	1185
Phosphorus	ppm	ASTM D5185m	1100	997	1108
Zinc	ppm	ASTM D5185m	1295	1172	1391
Sulfur	ppm	ASTM D5185m	3604	3236	3179

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	4	5
Sodium	ppm	ASTM D5185m	2	0	1
Potassium	ppm	ASTM D5185m >20	2	2	<1



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.8	0.7	1.4
Nitration	Abs/cm	*ASTM D7624 >20	7.1	8.0	7.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.0	20.3	20.2

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.0	16.6	14.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	11.17	10.24	8.84









OIL ANALYSIS REPORT

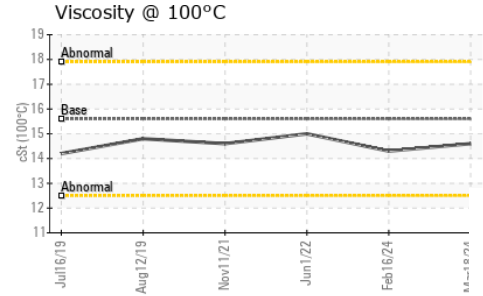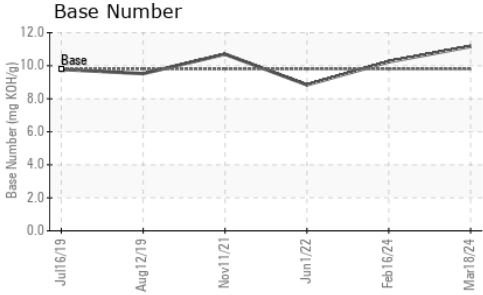

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	14.6	14.3	15.0

GRAPHS

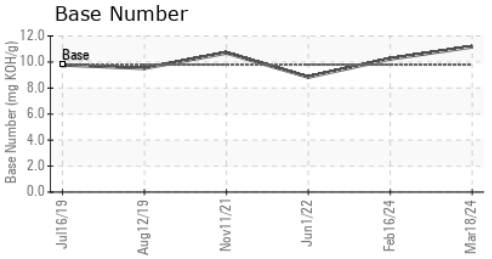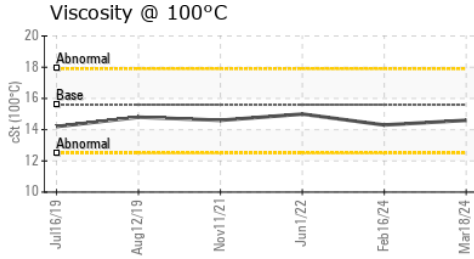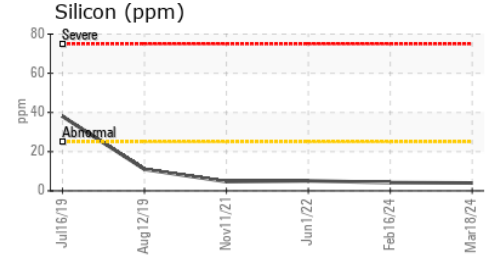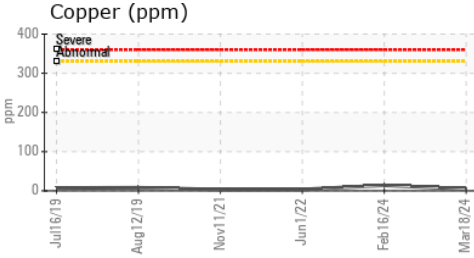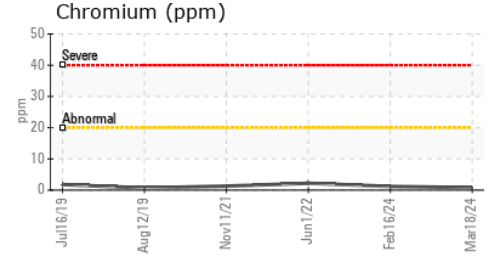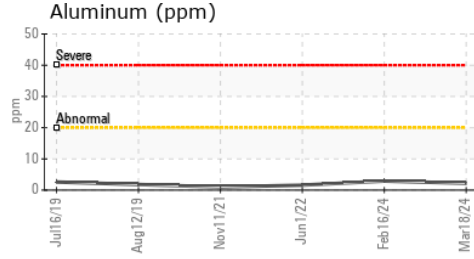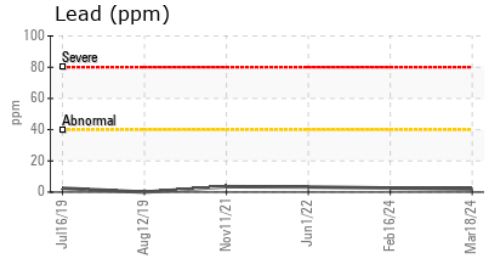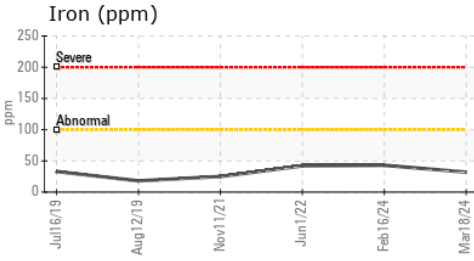

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0118457
Lab Number : **06129572**
Unique Number : 10943723
Test Package : MOB 2

Received : 26 Mar 2024
Tested : 27 Mar 2024
Diagnosed : 27 Mar 2024 - Wes Davis

SCRAP METAL SERVICES (SMS Mill Services LLC)
 1500 COMMERCIAL AVE
 MINGO JUNCTION, OH
 US 43938
 Contact: FRANK NALLY
 fnally@scrapmetalservices.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: