


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

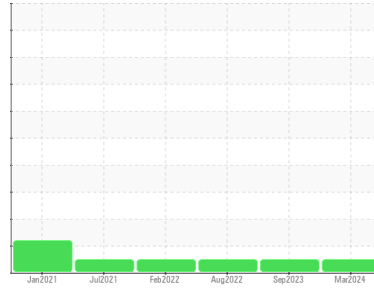

Machine Id  
**DT36**  
 Component  
**Transmission (Auto)**  
 Fluid  
**COGNIS EMGARD 2805 ATF (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the fluid.

#### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0120020</b>	PCA0107488	PCA0079539
Sample Date	Client Info			<b>26 Mar 2024</b>	29 Sep 2023	20 Aug 2022
Machine Age	mls	Client Info		<b>180058</b>	153864	77632
Oil Age	mls	Client Info		<b>153864</b>	75000	77632
Oil Changed	Client Info			<b>Not Chngd</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	<b>43</b>	105	73
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>11</b>	22	14
Lead	ppm	ASTM D5185m	>50	<b>9</b>	22	14
Copper	ppm	ASTM D5185m	>225	<b>10</b>	16	7
Tin	ppm	ASTM D5185m	>10	<b>2</b>	3	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>80</b>	81	88
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>1</b>	0	0
Calcium	ppm	ASTM D5185m		<b>115</b>	94	99
Phosphorus	ppm	ASTM D5185m		<b>159</b>	235	243
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>1806</b>	1284	1333

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	5	3
Sodium	ppm	ASTM D5185m		<b>4</b>	5	2
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	2

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

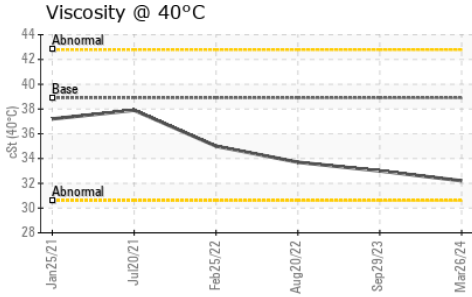




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	38.9	<b>32.2</b>	33.0

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

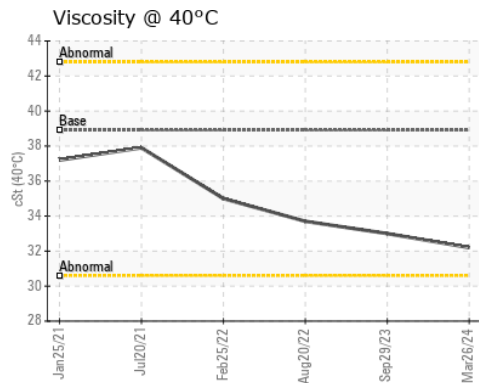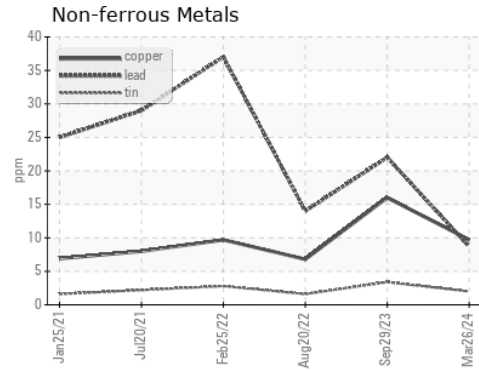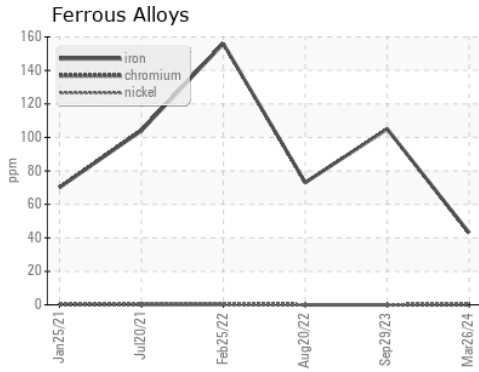

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0120020      **Received** : 28 Mar 2024  
**Lab Number** : 06132557      **Tested** : 30 Mar 2024  
**Unique Number** : 10952022      **Diagnosed** : 30 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**HK STEEL INC**  
 400 N PARSON ST  
 WEST COLUMBIA, SC  
 US 29169  
 Contact: GEORGE EDWARDS  
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: