


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

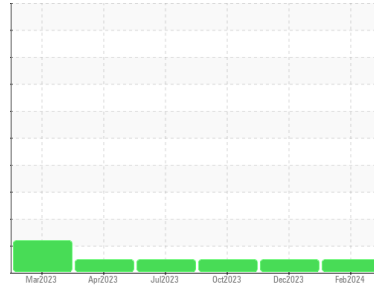

Machine Id
FORD 805 (S/N 1FDXE4FN5NDC35760)

Component
Gasoline Engine

Fluid
PETRO CANADA DURON UHP 5W30 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0117700	PCA0112898	PCA0105367
Sample Date	Client Info		26 Feb 2024	12 Dec 2023	04 Oct 2023
Machine Age	mls	Client Info	13334	11495	10008
Oil Age	mls	Client Info	1839	1487	2472
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	3	3	7
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >5	<1	<1	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >40	3	2	4
Lead	ppm	ASTM D5185m >50	<1	0	<1
Copper	ppm	ASTM D5185m >155	1	<1	2
Tin	ppm	ASTM D5185m >10	<1	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	118	98	43
Barium	ppm	ASTM D5185m 0	<1	0	0
Molybdenum	ppm	ASTM D5185m 64	73	66	79
Manganese	ppm	ASTM D5185m 0	<1	0	0
Magnesium	ppm	ASTM D5185m 1160	509	477	552
Calcium	ppm	ASTM D5185m 820	1225	1083	1007
Phosphorus	ppm	ASTM D5185m 1160	698	662	693
Zinc	ppm	ASTM D5185m 1260	809	758	861
Sulfur	ppm	ASTM D5185m 3000	2838	2972	3266

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	14	13	19
Sodium	ppm	ASTM D5185m >400	5	4	7
Potassium	ppm	ASTM D5185m >20	2	2	2



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	8.3	8.0	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.2	18.1	22.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.1	13.0	17.9
Base Number (BN)	mg KOH/g	ASTM D2896 11.0	5.1	4.8	4.3









OIL ANALYSIS REPORT

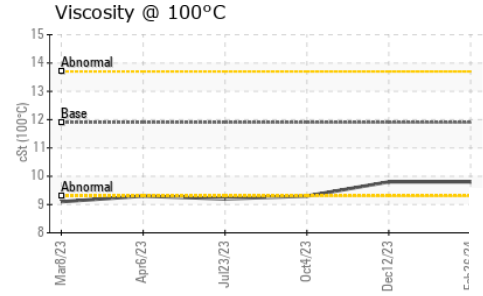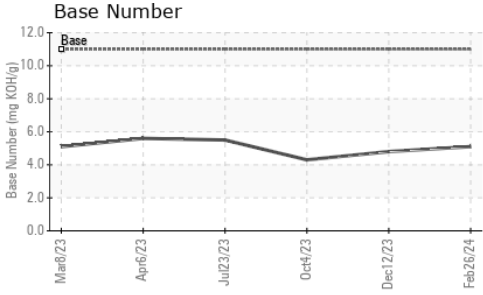

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.9	9.8	9.8	9.3

GRAPHS

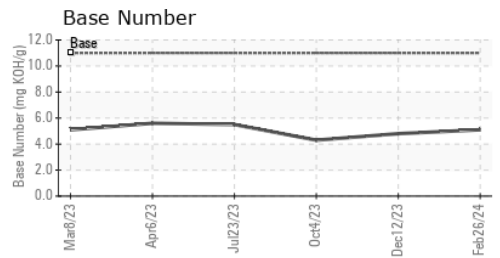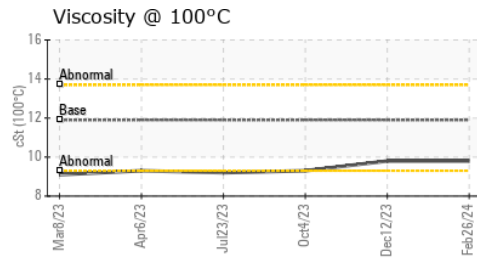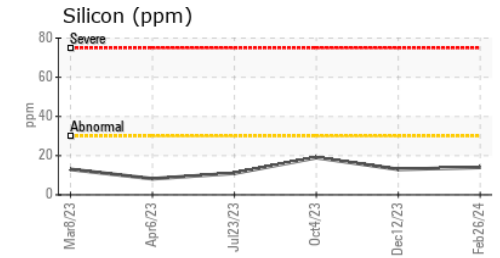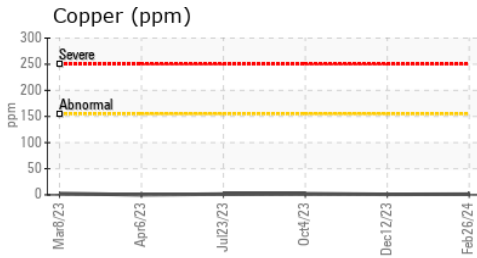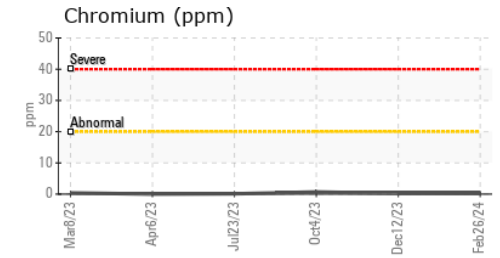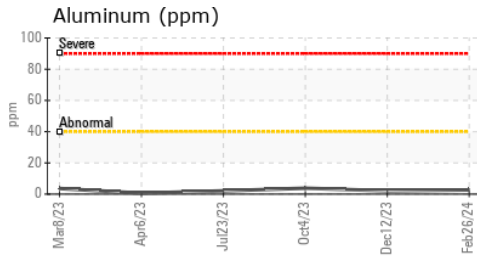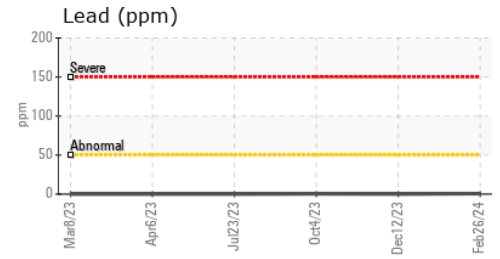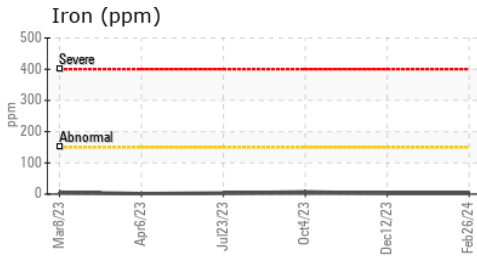

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0117700 **Received** : 29 Mar 2024
Lab Number : **06133897** **Tested** : 01 Apr 2024
Unique Number : 10953362 **Diagnosed** : 03 Apr 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: TBN)

VILLAGE OF NORTH RIVERSIDE
 2345 S DESPLAINES
 NORTH RIVERSIDE, IL
 US 60546
 Contact: Service Manager
 vznrdpw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: