

OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Machine Id

C253959

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0120650	---	---
Sample Date	Client Info		13 Mar 2024	---	---
Machine Age	mls	Client Info	0	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 105	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >4	0	---	---
Titanium	ppm	ASTM D5185m	10	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	● 22	---	---
Lead	ppm	ASTM D5185m >40	9	---	---
Copper	ppm	ASTM D5185m >330	5	---	---
Tin	ppm	ASTM D5185m >15	1	---	---
Vanadium	ppm	ASTM D5185m	4	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	8	---	---
Barium	ppm	ASTM D5185m 0	0	---	---
Molybdenum	ppm	ASTM D5185m 50	66	---	---
Manganese	ppm	ASTM D5185m 0	1	---	---
Magnesium	ppm	ASTM D5185m 950	871	---	---
Calcium	ppm	ASTM D5185m 1050	1438	---	---
Phosphorus	ppm	ASTM D5185m 995	885	---	---
Zinc	ppm	ASTM D5185m 1180	1167	---	---
Sulfur	ppm	ASTM D5185m 2600	3500	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	▲ 25	---	---
Sodium	ppm	ASTM D5185m	18	---	---
Potassium	ppm	ASTM D5185m >20	28	---	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	23.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	40.0	---	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	43.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	▲ 3.7	---	---

OIL ANALYSIS REPORT


▲ Ferrous Alloys

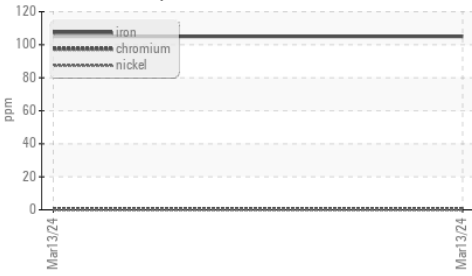


● FT-IR (Direct Trend)

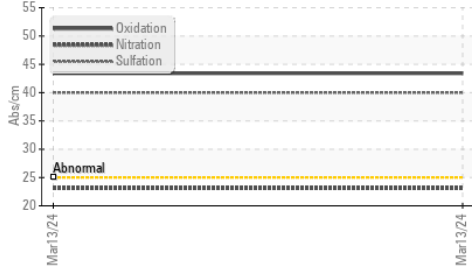


▲ Silicon (ppm)

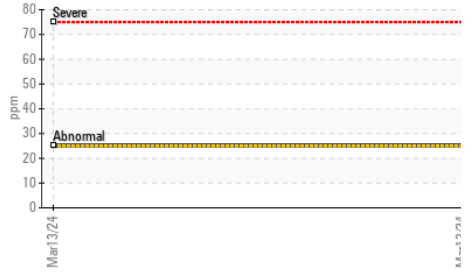

● Aluminum (ppm)

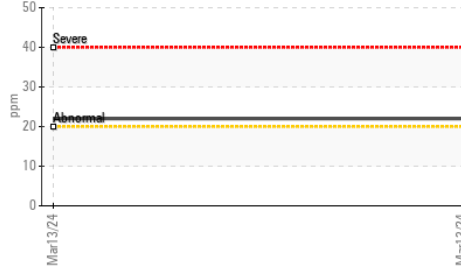

● FT-IR (Direct Trend)

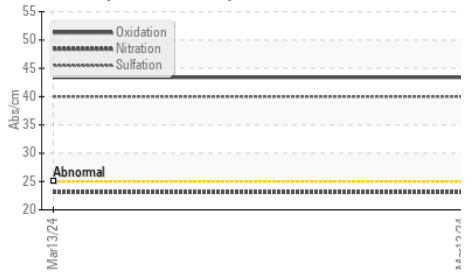


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	13.3	---

GRAPHS


▲ Iron (ppm)

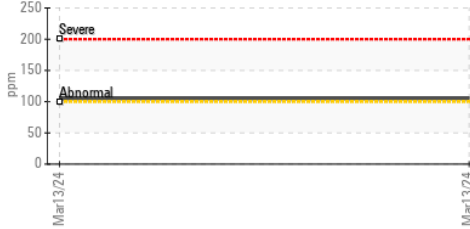

▲ Lead (ppm)

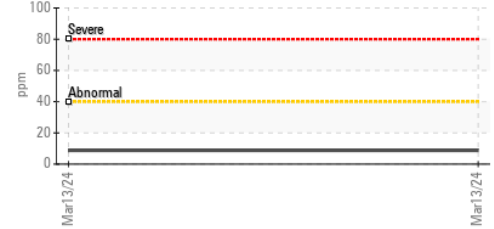


● Aluminum (ppm)

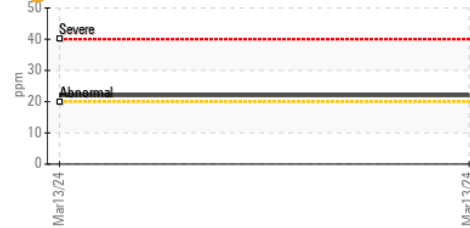


▲ Chromium (ppm)



● Copper (ppm)

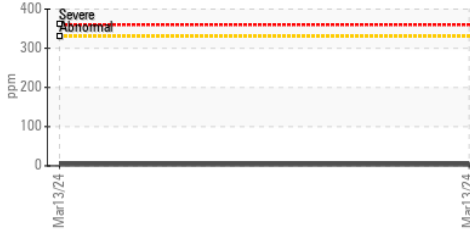


▲ Silicon (ppm)

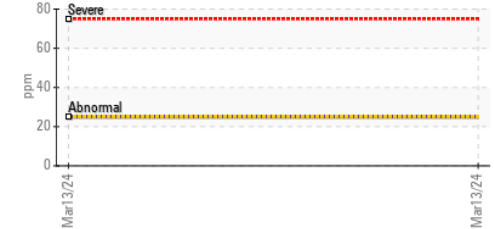

● Viscosity @ 100°C



▲ Base Number

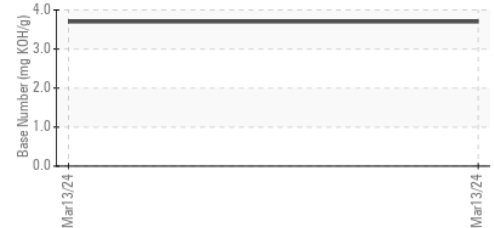

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0120650 **Received** : 02 Apr 2024
Lab Number : **06136133** **Tested** : 03 Apr 2024
Unique Number : 10955598 **Diagnosed** : 04 Apr 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #119
 39 INDUSTRIAL AVE
 HASBROUCK HEIGHTS, NJ
 US 07604
 Contact: MIKE LONGETTE
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (201)528-7053